


Building Mount
Corridor
Walkways
Accent
Building Entrances



BL-44

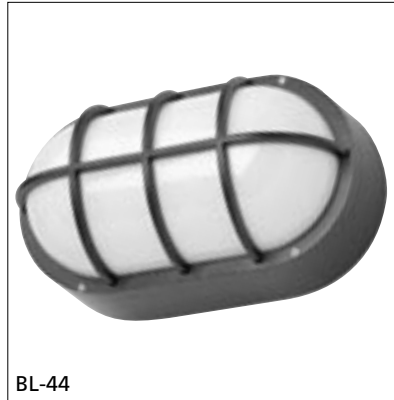

BL-45



BL-47



BL-48



BL-49

Specifications



Certifications

The fixture shall be ETL and CETL listed for wet location. Also meets IP65 standard.

Ballast Housing

Cast aluminum with a minimum thickness of 1/8". Mounting plate welded to ballast housing for J-box mounting. Conduit mounting available, consult factory. Housing is fully gasketed with 3/16" extruded EDPM cord gasket.

Lens Frame

Cast aluminum mounted to ballast housing with 1/4-20 stainless steel allen cap screws.

Lens

Opal UV-stabilized polycarbonate (OP) is standard. Lens supplied with one-piece extruded silicone gasket.

Ballast

Maximum HID-70 watts with polycarbonate lens. Fluorescent ballast for 42CFT lamp is electronic (minus 20° C). Other fluorescent 13- through 26-watt quad tube is core & coil (0° C).

Finish

BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.

PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street
 Santa Ana, CA 92704
 Phone: 714 668 3660
 Fax: 714 668 1107
 allighting@earthlink.net
 http://www.allighting.com

BL-44/45/47 48/49

Product Order Guide

Series	Max Watts	Lamp Type	Voltage ¹	Lens	Finish ¹	Options
BL-44	(2)26 CFQ	CFQ ²	120	OP Opal Polycarbonate	BK Black	EMG Emergency Battery Backup
BL-45	26 CFQ	CFQ ²	208		BZ Bronze	
BL-47	42 CFT	CFT ²	240		WH White	
BL-48	70 MH	E-17	277		GR Green	
BL-49	70 HPS	E-17			NA Natural Aluminum	
					GY Gray	
					CC Custom Color	

1 Consult factory for other colors and voltages

2 CF = single biax, CFQ = double biax, CFT = triple biax

Example: BL-48-70MH-E17-277-OP-WH

Luminaire Dimensions

Luminaire	A	B	C
BL-44	14"	8"	7-1/2"
BL-45	14"	8"	7-1/2"
BL-47	14"	8"	7-1/2"
BL-48	14"	8"	7-1/2"
BL-49	14"	8"	7-1/2"

