



**INSTALLATION SHEET**

**Safety, Warnings and Suggestions**


- <sup>1</sup> *Care* should be taken not to position fixtures in locations where bare skin can come into contact with the potentially high temperatures on the lens.
- <sup>2</sup> *Make* sure that electrical power is disconnected before any work is performed.
- <sup>3</sup> *All* gaskets and sealing surfaces must be kept clean during installation.
- <sup>4</sup> *All* wiring and installation should meet local, state and national electrical codes.
- <sup>5</sup> *Install* correct lamp type and wattage.



BL-85




BL-86




BL-87



BL-89

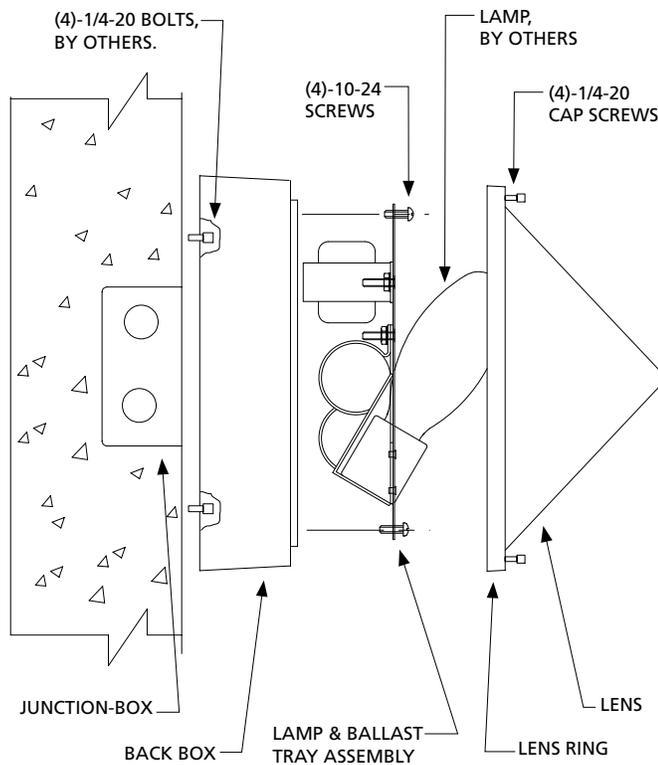

**TYPICAL WALL INSTALLATION**

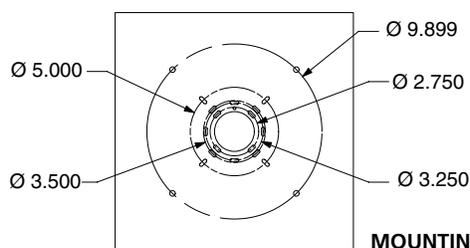

**MOUNTING DETAIL**

1. Remove the fixture from the box. Remove the lens and lens frame by loosening (4)-1/4-20 cap screws. Remove the ballast tray assembly by loosening (4)-10-24 screws.
2. Secure the back box to the wall with (4)-1/4-20 bolts or to the junction box with 8-32 screws, hardware by others. Make power and ground connection using UL approved connectors at the Junction-box (J-box by others). Reinstall the ballast tray with the (4)-10-24 screws provided-(See step 3)
3. (LAMP INSTALLATION)  
Install the correct lamp type and wattage. Reinstall the lens and lens frame. Tighten the (4)-1/4-20 cap screws.

BL