

Walkways
Building Entrances
Parking Lots
Shopping Malls



Specifications



- Certifications** The fixture shall be ETL and CETL listed for wet location.
- Light Distribution** The luminaire shall meet the specified light distribution and footcandle levels with an internal optical system.
- Assembly** Field assembly to pole or bracket shall be accomplished without having to remove or disassemble any components. Fixture shall be ETL listed "suitable for wet locations."
- Ballast** Ballast shall be readily accessible, removable and insulated. The fixture is to be pre-wired, completely assembled and electronically tested prior to shipment. Quick disconnects are standard.
- Optical Assembly** The optical assembly shall be of all non-ferrous components. Lens panels shall be of impact resistant acrylic, and fixture shall be fully gasketed to prevent entry of moisture, dust and insects.
- Finish** BK-BZ-WH-GR-GY-NA baked enamel standard, other colors available.
- Mounting Detail** Standard fitter is for 3" O.D. pole top. If tenon is required, specify exact tenon dimension and dimensions of round or square pole tops to ensure compatibility.

PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street
 Santa Ana, CA 92704
 Phone: 714 668 3660
 Fax: 714 668 1107
 allighting@earthlink.net
 http://www.allighting.com

AA-01

Product Order Guide

Series	Size	Max Watts	Lamp Type	Lamp Voltage ¹	Optics	Finish ¹	Options
AA-01	22 (up to 175 W)	175 MH	E-17 ²	120	TOA	BZ Bronze	HSS House Side Shield
	24 (up to 175 W)	250 MH	ED-28	208	TCA	BK Black	PCB Button Photo Control
	30 (up to 250 W)	175 HPS	E-17 ²	240	OA	WH White	F Fusing
	42 (up to 250 W)	250HPS	ED-18	277	OP	GR Green	FF Double Fusing
					CLF	NA Natural Aluminum	WM Wall Mount
					CLL	GY Gray	DL Downlight ³
						CC Custom Color	UL Uplight ³

1 Consult factory for other colors and voltages

2 Lamps 175 W and below are medium base.

3 30" head size only


Example: AA-01-22-150HPS-E17-120-OA-BK-PCB

Optics

TOA	Textured Opal Acrylic
TCA	Textured Clear Acrylic
OA	Opal Acrylic
OP	Opal Polycarbonate
CLF	Type 5 Refractor W/Clear Lens
CLL	Louver Assembly W/Clear Lens

Luminaire Dimensions

Luminaire	A	B	Weight	EPA
AA-01-22	10-1/8"	22"	40#	2.2
AA-01-24	15"	24"	44#	2.4
AA-01-30	15"	30"	50#	2.9
AA-01-42	15"	42"	62#	4

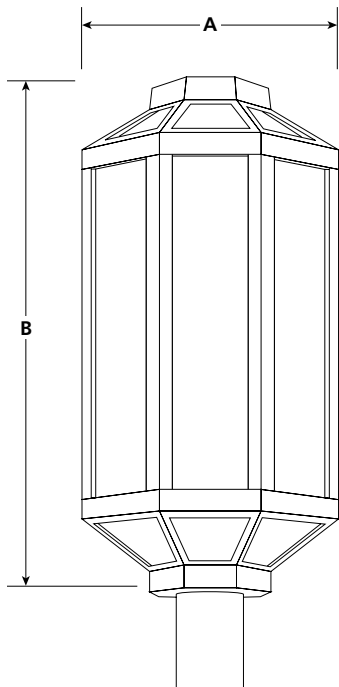

NOTE:
AA-01-30 Shown
with Windows