

Pedestrian Areas
Walkways
Building Entrances
Parking Lots
Shopping Malls
Landscape Areas



AA-40/AA-41



AA-140/AA-141



AA-40-CL/AA-41-CLL



AA-140-CL/AA-141-CLL

Specifications



Certifications ETL and CETL listed for wet location. Meets IP65 standard.

Housing The housing shall be constructed of heavy duty cast aluminum with a minimum 3/16" wall thickness.

Shade The shade shall be constructed of heavy duty cast aluminum with a minimum 3/16" wall thickness.

Mounting Detail The AA-40/140 fixtures shall externally slipfit a 2-3/8" O.D. tenon (min 2-3/8" tall). The AA-41/141 fixtures shall externally slipfit a 3" O.D. tenon (min 3" tall).

The Bracket Mount (BM) shall externally slipfit a specified tenon.

Ballast The ballast shall be readily accessible, removable and insulated. The fixture is to be pre-wired and electronically tested before shipment.

Lens The lens shall be opal acrylic for wide angle light distribution or clear acrylic with louver system. (CLL option)

Lamp Holder The standard lampholder shall be 4KV pulse rated medium base, for HID and Incandescent lamp sources.

Hardware All exposed hardware shall be stainless steel.

Finish BK-BZ-WH-GR-GY-NA baked enamel paint standard. Powder coat and custom colors available on request.

PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street
 Santa Ana, CA 92704
 Phone: 714 668 3660
 Fax: 714 668 1107
 allighting@earthlink.net
 http://www.allighting.com

AA-40/AA-140

AA-41/AA-141

natural aluminum

bronze

gray

green

white

black

Product Order Guide

Series	Max Watts	Lamp Type	Voltage ¹	Finish ²	Options
AA-40	13CF	CF	120	BK Black	WM Wall Mount
AA-140	26CFQ	CFQ	208	BZ Bronze	CLL Clear Lens with louvers
	42CFT	CFT	240	WH White	BM2180 ⁴ Pole adaptor 2 @ 180°
	70MH	T6	277	GR Green	BM3120 ⁴ Pole adaptor 3 @ 120°
	70HPS	E-17		NA Natural Aluminum	BM490 ⁴ Pole adaptor 4 @ 90°
	100MH	E-17		GY Gray	
				CC Custom Color	
AA-41	150HPS	E-17			
AA-141	150MH	T6			
	175MH	E-17			

¹ Consult factory for other voltages.

² Baked enamel paint standard. Powder coat and custom colors available on request.

Note: E-17 Lamps 175W and below are medium base


CF=single biax, CFQ=double biax, CFT=triple biax

⁴ Specify tenon size.


Example: AA-40-100MH-E17-277-BK-WM

Luminaire Dimensions


Luminaire	A		B		C		EPA	Weight	
	Inch	mm	Inch	mm	Inch	mm		lbs.	kg
AA-40	7.50	190	21.00	533	20.00	508	1.26	30	13.6
AA-40-WM	11.00	279	27.25	692	27.00	686	2.16	36	16.3
AA-40-BM2180	36.00	914					3.71	70	31.8
AA-41	8.65	220	23.69	602	23.38	594	1.77	52	23.6
AA-41-WM	11.00	279	28.63	727	30.38	772	2.67	58	26.3
AA-41-BM2180	36.00	914					4.73	114	51.7
AA-140	7.50	190	21.00	533	23.00	584	1.31	36	16.3
AA-140-WM	11.00	279	27.25	692	30.00	762	2.21	42	19.1
AA-140-BM2180	36.00	914					3.81	82	37.2
AA-141	8.65	220	23.69	602	25.38	645	1.87	60	27.2
AA-141-WM	11.00	279	28.63	727	32.38	822	2.77	66	29.9
AA-141-BM2180	36.00	914					4.93	130	59.0

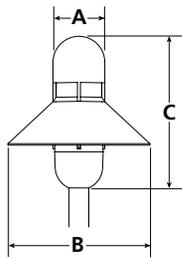


AA-140/AA-141

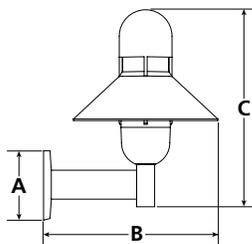


AA-140-WM/AA-141-WM

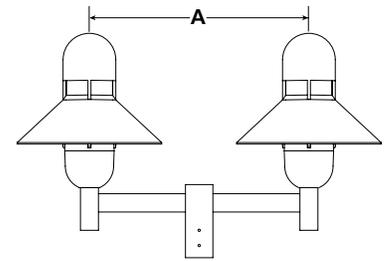


AA-140-BM2180/AA-141-BM2180



AA-40/AA-41

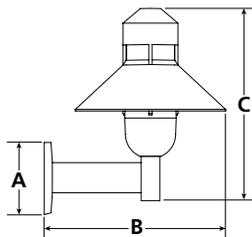

AA-40-WM/AA-41-WM

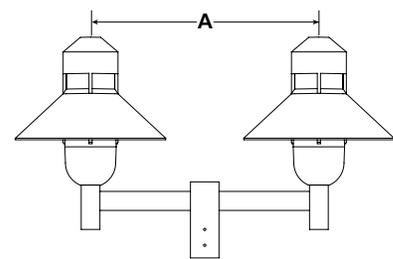

AA-40-BM2180/AA-41-BM2180