

**Pedestrian Areas**  
**Walkways**  
**Building Entrances**  
**Parking Lots**  
**Shopping Malls**  
**Landscape Areas**



**AA-30/AA-31**



**AA-130/AA-131**

### Specifications



**Certifications** ETL and CETL listed for wet location. Meets IP65 standard.

**Housing** The housing shall be constructed of heavy duty cast aluminum with a minimum 3/16" wall thickness.

**Shade** The shade shall be constructed of heavy duty cast aluminum with a minimum 3/16" wall thickness.

**Mounting Detail** The fixture arm shall internally slipfit a 3" or 4" O.D. pole. Consult Factory for other pole sizes.

The Arm Mount (AM) brackets shall externally slipfit a 3" or 4" O.D. pole. Consult Factory for other pole sizes.

The pendant mounted option (P) is supported by an aluminum pipe 1" O.D. (specify length) with a hang straight bracket (max. 25° slope) attached with two 3/8" bolts on a 5-3/4" bolt circle and a canopy for mounting over a recessed 4" square junction box.

**Ballast** The ballast shall be readily accessible, removable and insulated. The fixture is to be pre-wired and electronically tested before shipment.

**Lens** The lens shall be opal acrylic for wide angle light distribution

**Lamp Holder** The standard lampholder shall be 4KV pulse rated medium base, for HID and Incandescent lamp sources.

**Hardware** All exposed hardware shall be stainless steel.

**Finish** BK-BZ-WH-GR-GY-NA baked enamel paint standard. Powder coat and custom colors available on request.

PROJECT
FIXTURE TYPE
CATALOG#

2930 South Fairview Street  
 Santa Ana, CA 92704  
 Phone: 714 668 3660  
 Fax: 714 668 1107  
 allighting@earthlink.net  
 http://www.allighting.com

# AA-130/AA-131

# AA-30/AA-31

natural aluminum

bronze

gray

green

white

black

### Product Order Guide

Series	Max Watts	Lamp Type	Voltage <sup>1</sup>	Finish <sup>2</sup>	Options
AA-30	13CF	CF	120	BK Black	WM Wall Mount
AA-130	26CFQ	CFQ	208	BZ Bronze	P <sup>3</sup> Specify Pendant Length
	42CFT	CFT	240	WH White	
	70MH	T6	277	GR Green	AM2180 <sup>4</sup> Pole adaptor 2 @ 180°
	70HPS	E-17		NA Natural Aluminum	AM3120 <sup>4</sup> Pole adaptor 3 @ 120°
	100MH	E-17		GY Gray	AM490 <sup>1</sup> Pole adaptor 4 @ 90°
				CC Custom Color	
AA-31	150HPS	E-17			
AA-131	150MH	T6			
	175MH	E-17			

<sup>1</sup> Consult factory for other voltages.

<sup>2</sup> Baked enamel paint standard. Powder coat and custom colors available on request.

<sup>3</sup> Specify pendant length in inches or mm.

Note: E-17 Lamps 175W and below are medium base


CF=single biax, CFQ=double biax, CFT=triple biax

<sup>4</sup> Specify pole size.


### Example: AA-30-100MH-E17-277-BK-WM

### Luminaire Dimensions


Luminaire	A		B		C		D		EPA	Weight	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm		lbs.	kg
AA-30	35.00	889	17.50	445	21.00	533	13.00	330	0.94	26	11.8
AA-30-WM	11.00	279	7.00	178	38.88	988			1.27	32	14.5
AA-30-P	13.25	337	17.00	432	21.00	533	13.00	330	0.96	29	13.2
AA-30-AM2180	32.67	830	38.00	965	40.25	1022			2.44	60	27.2
AA-31	32.67	830	19.50	495	23.69	602	16.16	410	1.37	42	19.1
AA-31-WM	11.00	279	7.00	178	30.38	772			1.70	48	21.8
AA-31-P	13.25	337	17.00	432	23.69	602	16.16	410	1.52	45	20.4
AA-31-AM2180	35.00	889	42.00	1037	42.75	1086			3.30	94	42.6
AA-130	35.00	889	17.50	445	21.00	533	15.00	381	1.02	30	13.6
AA-130-WM	11.00	279	27.25	692	30.00	762			1.35	36	16.3
AA-130-P	13.25	337	17.00	432	21.00	533	15.00	381	1.17	33	15.0
AA-130-AM2180	32.67	830	38.00	965	40.25	1022			2.60	68	30.8
AA-131	32.67	830	19.50	495	23.69	602	18.19	462	1.46	50	22.7
AA-131-WM	11.00	279	28.63	727	32.38	822			1.79	56	25.4
AA-131-P	13.25	337	17.00	432	23.69	602	18.19	462	1.61	53	24.0
AA-131-AM2180	35.00	889	42.00	1037	42.75	1086			3.48	110	49.9




AA-130/AA-131




AA-130-P13.25"/AA-131-P13.25"

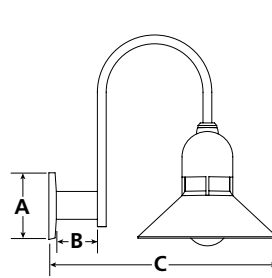


AA-130-WM/AA-131-WM

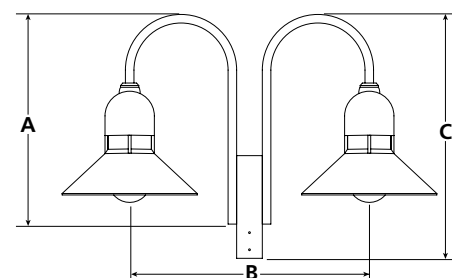


AA-130-AM2180/AA-131-AM2180

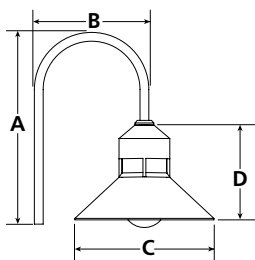


AA-30/AA-31

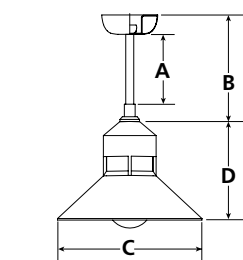

AA-30-P13.25"/AA-31-P13.25"

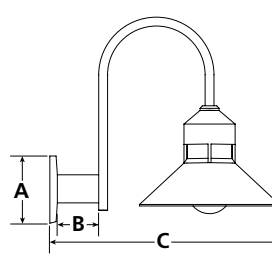

AA-30-WM/AA-31-WM

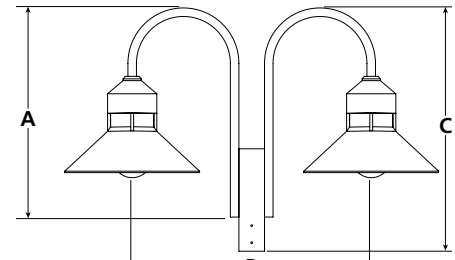

AA-30-AM2180/AA-31-AM2180