

Halcyon™ *ClimaPlus*™ Logix™ Panels



2' x 6' HALCYON *CLIMAPLUS* field panels, 6" x 48" HALCYON *CLIMAPLUS* channel panels,
FINELINE DXF suspension system

LEED Credits

Recycled Content: 40% – 41%
LEED Recycled Content Contribution: 40% – 41%
CLIMAPLUS Superior Performance for Mold and Mildew

MR				EQ		
Waste Reduction	Recycled Content	Regional Materials ¹	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
	●	●			●	●

Features and Benefits


- Compatible with the LOGIX integrated ceiling system
- Monolithic, structured ceiling visual using standard components
- High light-reflective finish (LR-.88) reduces light fixtures and energy use
- Washable and scrubbable finish – impact and scratch resistant
- *CLIMAPLUS*™ 30-year lifetime system warranty against visible sag, mold and mildew

Applications

- Open-plan offices
- Reception and lobby areas
- Media centers and libraries
- Airports
- Spaces with indirect or natural lighting

Substrate

- Fiberglass

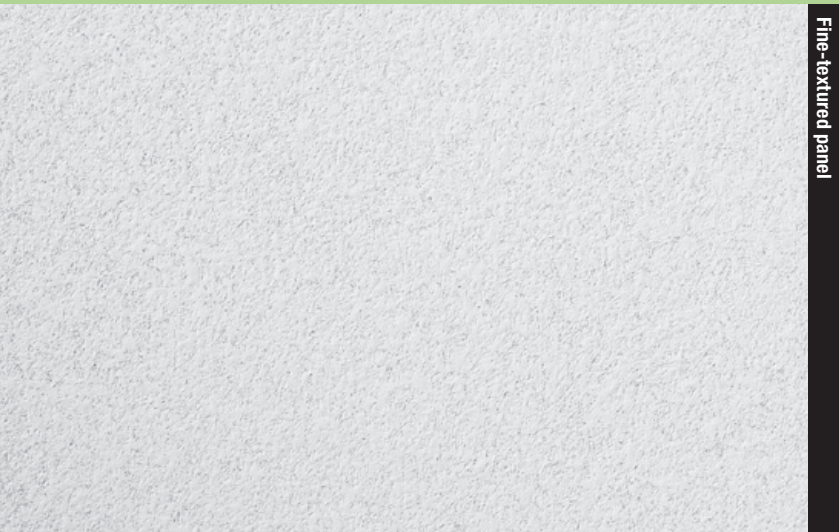

Fine-textured panel

To order samples, go to usg.com



White

Halcyon™ ClimaPlus™ Logix™ Panels

To order samples/literature:
 – Web: usg.com
 – E-mail: samplit@usg.com
 – Fax: 888.874.2348
 Technical Services: 800.USG.4YOU

Web Sites: usg.com
usgdesignstudio.com
sustainableceilings.com
seismicceilings.com

See usg.com for
 the most up-to-date
 product information.

30 Year System Warranty – No visible sag – Mold/mildew protection	UL Classified											
	Edge	Panel Size ^{2,3}	Class	Item No.	NRC	CAC Min.	LR ⁴	Color	Grid Options	Anti-Mold & Mildew	Recycled Content ¹	Panel Cost
HALCYON CLIMAPlus Logix Field Panels	SQ 	2'x2'x1"	Class A	98221	.95 	20	.88 	White	A		41%	\$\$
		2'x4'x1"	Class A	98241	.95 	20	.88 	White	A		41%	\$\$
		20"x60"x1"	Class A	98261	.95 	20	.88 	White	A		41%	\$\$
		30"x60"x1"	Class A	97266	.95 	20	.88 	White	A		41%	\$\$\$
	SL 	2'x2'x1"	Class A	98223	.95 	20	.88 	White	B		41%	\$\$
		2'x4'x1"	Class A	98243	.95 	20	.88 	White	B		41%	\$\$
		20"x60"x1"	Class A	99267	.95 	20	.88 	White	B		41%	\$\$
		30"x60"x1"	Class A	99270	.95 	20	.88 	White	B		41%	\$\$\$
	FL 	2'x2'x1"	Class A	98225	.95 	20	.88 	White	C, D, E		41%	\$\$
		2'x4'x1"	Class A	98245	.95 	20	.88 	White	C, D, E		41%	\$\$
		21"x24"x1"	Class A	98195	.95 	20	.88 	White	C, D, E		41%	\$\$\$
		24"x42"x1"	Class A	98196	.95 	20	.88 	White	C, D, E		41%	\$\$\$
		24"x57"x1"	Class A	98341	.95 	20	.88 	White	C, D, E		41%	\$\$\$
		24"x60"x1"	Class A	96271	.95 	20	.88 	White	C, D, E		41%	\$\$\$
		42"x48"x1"	Class A	98343	.95 	20	.88 	White	C, D, E		41%	\$\$\$
		20"x54"x1"	Class A	98360	.95 	20	.88 	White	C, D, E		41%	\$\$\$
		27"x30"x1"	Class A	97333	.95 	20	.88 	White	C, D, E		41%	\$\$\$
		30"x54"x1"	Class A	98359	.95 	20	.88 	White	C, D, E		41%	\$\$\$
		20"x60"x1"	Class A	98194	.95 	20	.88 	White	C, D, E		41%	\$\$
		30"x60"x1"	Class A	98336	.95 	20	.88 	White	C, D, E		41%	\$\$\$
HALCYON CLIMAPlus Logix Channel Panels	SQ 	6"x48"x1"	Class A	97227	.95 	20	.88 	White	A		41%	\$\$\$\$
		6"x60"x1"	Class A	97228	.95 	20	.88 	White	A		41%	\$\$\$\$
	SL 	6"x48"x1"	Class A	99271	.95 	20	.88 	White	B		41%	\$\$\$\$
		6"x60"x1"	Class A	99272	.95 	20	.88 	White	B		41%	\$\$\$\$
	FL 	6"x48"x1"	Class A	98198	.95 	20	.88 	White	C, D, E		41%	\$\$\$\$
		6"x60"x1"	Class A	98199	.95 	20	.88 	White	C, D, E		41%	\$\$\$\$
HALCYON CLIMAPlus Planks	SQ 	2'x6'x3/4"	Class A	97262	.90 	20	.88 	White	A		40%	\$\$\$
		2'x8'x3/4"	Class A	97263	.90 	20	.88 	White	A		40%	\$\$\$
	SL 	2'x6'x1"	Class A	99268	.95 	20	.88 	White	B		41%	\$\$\$\$
		2'x8'x1"	Class A	99269	.95 	20	.88 	White	B		41%	\$\$\$\$
	FL 	2'x6'x1"	Class A	98348	.95 	20	.88 	White	C, D, E		41%	\$\$\$\$
		2'x8'x1"	Class A	98197	.95 	20	.88 	White	C, D, E		41%	\$\$\$\$
Grid Profile Options	A DX®/DXL™ 	B DX/DXL 	C CENTRICITEE DXT 	D FINELINE® DXF 	E IDENTITEE™ DXI™ 	Legend  CLIMAPlus Inherent Performance ⁵ Fiberglass substrate is inherently resistant to the growth of mold and mildew.						

Physical Data/ Footnotes	Product literature Data sheet: SC2518 ASTM E1264 classification Type XII, Form 2, Pattern E & G ASTM E84 surface burning characteristics Class A Flame spread: 25 Smoke developed: 50	Weight 0.38 lb./sq. ft. (3/4" panels) 0.47 lb./sq. ft. (1" panels) Thermal resistance R-3.3 (3/4" panels) R-4.4 (1" panels) Scrubability Exceeds 1000+ scrub cycles without surface break or the extent of abrasion (ASTM D2486)	Washability Exceeds 1000+ wash cycles without surface break or the extent of abrasion (ASTM D4828) Maintenance Can be cleaned easily with a soft brush or vacuum. Maximum backloading See Warranty for details.	Footnotes 1. For details, see LEED report generator at usgdesignstudio.com . 2. Custom-size panels available. Please contact your USG sales representative for details. 3. Stabilizer bars recommended for panels 5' and longer. See USG parts list IC532 for details. 4. LR values are shown as averages.	5. For details, see <i>Ceiling Systems Warranties and Limitations</i> (SC2102) and <i>CumaPlus Ceilings Certification of Performance</i> (SC2451).
-----------------------------	--	---	--	---	--