



RADAR Panels/  
DONN DX/DXL Suspension System

#### Features and Benefits

- Non-directional pattern with a fresh, clean appearance offers fast, efficient installation.
- Economical, all-purpose ceiling pattern offered in many sizes.
- Optional FIRECODE™ formulation designed to meet life safety codes.

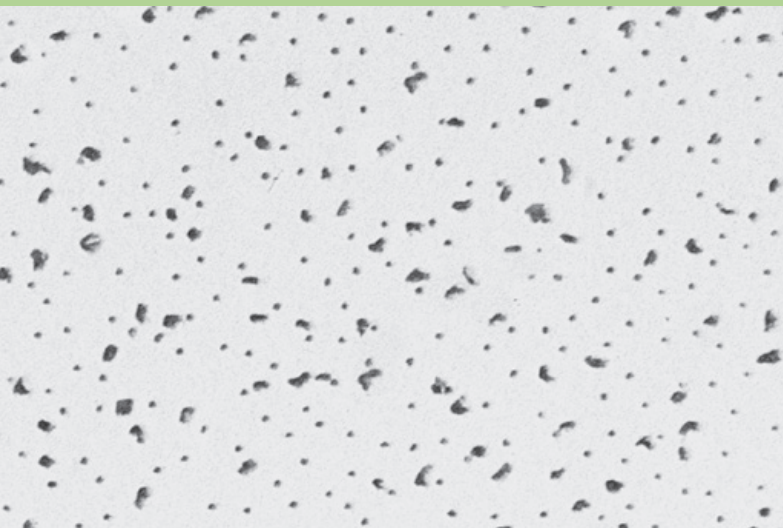
#### Applications

- Schools
- Corridors
- Offices
- Retail stores

#### Substrate

- Water-felted mineral fiber

See LEED report tool at [usgdesignstudio.com](http://usgdesignstudio.com) for detailed sustainability information.



















Light-tufted panel










To order samples, go to [usg.com](http://usg.com)



White

	UL Classified											
	Edge	Panel Size Imperial Metric (mm)	Class <sup>2</sup>	Item No. Imperial Metric	NRC	CAC Min.	LR <sup>3</sup>	Color	Grid Options	VOC Emissions	Recycled Content <sup>1</sup>	Panel Cost
												
RADAR Panels	SQ 	2'x2'x5/8"	Class A	2110 ME2110	.55	33	.85	White	A, B, C	Low	24-28%	\$
		600 x 600 x 15										
		2'x2'x5/8"		2115	.55	35	.85	White	A	Low	41%	\$
		2'x4'x5/8"	Class A	2310 ME2310	.55	35	.85	White	A, B	Low	21-28%	\$
		600x1200x15										
		2'x4'x5/8"		2315	.55	35	.85	White	A	Low	41%	\$
		2'x5'x5/8"	Class A	2619	.55	35	.85	White	A, B	Low	24-28%	\$
	20"x60"x5/8"	Class A	2617	.55	35	.85	White	A, B	Low	24-28%	\$	
	30"x60"x3/4"	Class A	2618	.60	35	.85	White	A, B	Low	24-28%	\$	
	SLT 	2'x2'x5/8"	Class A	2120 ME2120	.55	33	.85	White	D	Low	24-29%	\$
600x600x15												
2'x2'x5/8"			2125	.55	35	.85	White	D	Low	49-58%	\$	
2'x4'x5/8"		Class A	2320	.55	35	.85	White	D	Low	24-29%	\$	
FLB 	2'x2'x5/8"	Class A	2130	.55	33	.85	White	E, F, G, H	Low	24-29%	\$	
RADAR Tile <sup>4,5</sup>	BESK 	12"x12"x5/8"	Class A	2990	.50	40	.85	White	I	Low	24-44%	\$\$\$
RADAR Illusion Two/24 Panel The look of 2'x2' panels	SLT 	2'x4'x3/4"	Class A	2742	.55	35	.84	White	D	Low	29%	\$\$

	<b>Illusion Two/24</b>	<b>Legend</b>
<b>Pattern</b>		<p> <b>Low Emissions (VOC)</b></p> <p>Low-Emitting performance meets CA Specification 01350 (CA Dept. of Health Services Standard Practice for the testing of VOC emissions) and is listed on CHPS data base for low-emitting materials. USG Certificate of Compliance for Low VOC Emissions also available on usg.com</p>

	<b>A</b> DX®/DXL™	<b>B</b> DXW™	<b>C</b> CENTRICITEE™ DXT	<b>D</b> DX/DXL	<b>E</b> CENTRICITEE DXT®	<b>F</b> FINELINE® DXF	<b>G</b> FINELINE® 1/8 DXFF	<b>H</b> IDENTITEE™ DXI™	<b>I</b> DX®/DXL™ Concealed	
<b>Grid Profile Options</b>										

<b>Physical Data/ Footnotes</b>	<b>Product literature</b> Data sheet: SC2288	<b>Weight</b> .61-1.15 lb./sq. ft.	<b>Maximum backloading</b> See Warranty for details.	<b>Footnotes</b> 1. For details see LEED report tool at <a href="http://usgdesignstudio.com">usgdesignstudio.com</a> 2. Fire-rated items: see UL design details. 3. LR values are shown as averages. 4. Contact USG for adhesive recommendation for 12"x12" glue-up applications. 5. Not UL Classified for acoustics.
	<b>ASTM E1264 classification</b> Type III, Form 2, Pattern C, E and C, E, K  <b>ASTM E84 surface burning characteristics</b> Class A Flame spread: 25 Smoke developed: 50	<b>Thermal resistance</b> R-1.4 (Class A, 5/8" panels and tile) R-1.7 (Class A, 3/4" panels) R-1.4 (Class A, 15 mm panels) R-1.6 (Firecode, 5/8" panels)	<b>Maintenance</b> Can be cleaned easily with a soft brush or vacuum.	