



Rock Face Panels with *ClimaPlus* Superior Performance/
DOWN® DX/DXL Suspension System

LEED Credits

Recycled Content: 49%
ClimaPlus Superior Performance for Mold/Mildew

MR				EQ		
Waste Reduction¹	Recycled Content	Regional Materials²	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
●	●	●	●	●	●	●

Features and Benefits


- Specially compounded textured surface with hard core.
- Perfect for increased abuse resistance and sag resistance.
- *ClimaPlus* 30-year lifetime system warranty to withstand conditions up to 104 °F (40 °C)/95% relative humidity without visible sag when used with a DOWN® brand suspension system.
- FIRECODE™ formulation designed to meet life safety codes.

Applications

- Athletic areas and exercise rooms
- Schools
- Corridors
- Dormitory rooms

Substrate

- Water-felted mineral fiber

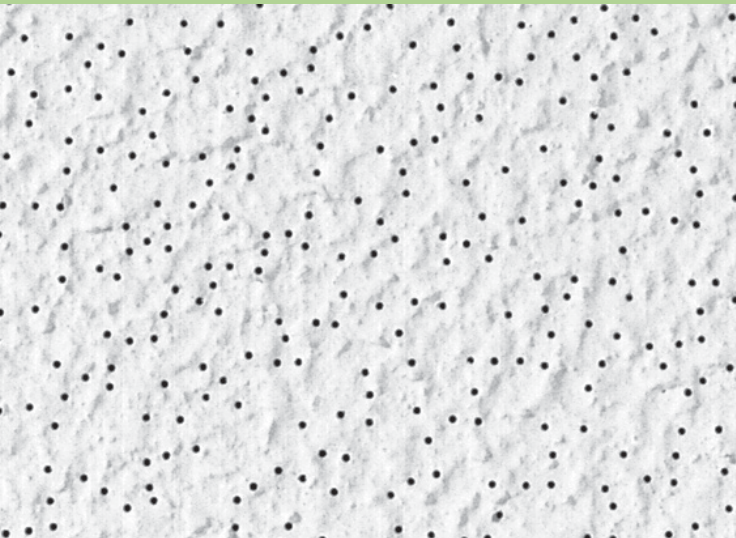

Fine-textured panel

Call 888.874.2450 for samples



White

30

Year System Warranty
 – No visible sag
 – Mold/mildew protection

ROCK FACE
CLIMAPlus Panels

UL Classified													
Edge	Panel Size	Class ³	Item No.	NRC	CAC Min.	LR ⁴	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Abuse-Resistant	Recycled Content ⁵	Panel Cost
													
SQ 	2'x2' x5/8"		56335	.55	35	.86	White	A, B, C	Low			49%	\$\$
	2'x4' x5/8"		56380	.55	35	.86	White	A, B, C	Low			49%	\$\$
SLT 	2'x2' x3/4"		55483	.55	35	.86	White	D, E, F	Low			49%	\$\$

Legend

Low Emissions (VOC Class)

Classified as low-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods.

CLIMAPlus Superior Performance⁶

Contains a broad-spectrum antimicrobial treatment on the face and back of the panel that provides guaranteed resistance against the growth of mold/mildew.

A
 DX®/DXL™

B
 DXLA™


C
 ZXLA™

D
 DX/DXL

E
 DXLA

F
 ZXLA

Grid Profile
 Options



Physical Data/ Footnotes

Product literature
 Data sheet: SC1840

ASTM E1264 classification
 Type III, Form 2, Pattern CE

ASTM E84 surface burning characteristics
 Class A
 Flame spread: 25
 Smoke developed: 50

Weight
 1.0-1.3 lb./sq. ft.

Thermal resistance
 R-1.6 (5/8" panels)
 R-1.9 (3/4" panels)

Maximum backloading
 See Warranty for details.

Maintenance
 Can be cleaned easily with a soft brush or vacuum.

Durability tests
 ASTM D1037: Tested to 45 lbf. for a 1/4" depression by a Janka ball.
 ASTM D5420: Tested to 3.5 in./lbf. for impactation.

Footnotes

1. Applies when USG acoustical ceilings recycling program is utilized.
2. Dependent on location; see Sustainability selector.
3. Fire-rated items: see UL design details.
4. LR values are shown as averages.
5. For details, see Sustainability selector.
6. Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial standard

formulation that inhibits and retards the growth of mold/mildew. For details, see *Ceiling Systems Limited Warranty Commercial Applications* (SC2102) and *ClimaPlus Ceilings Certification of Performance* (SC2451).

