


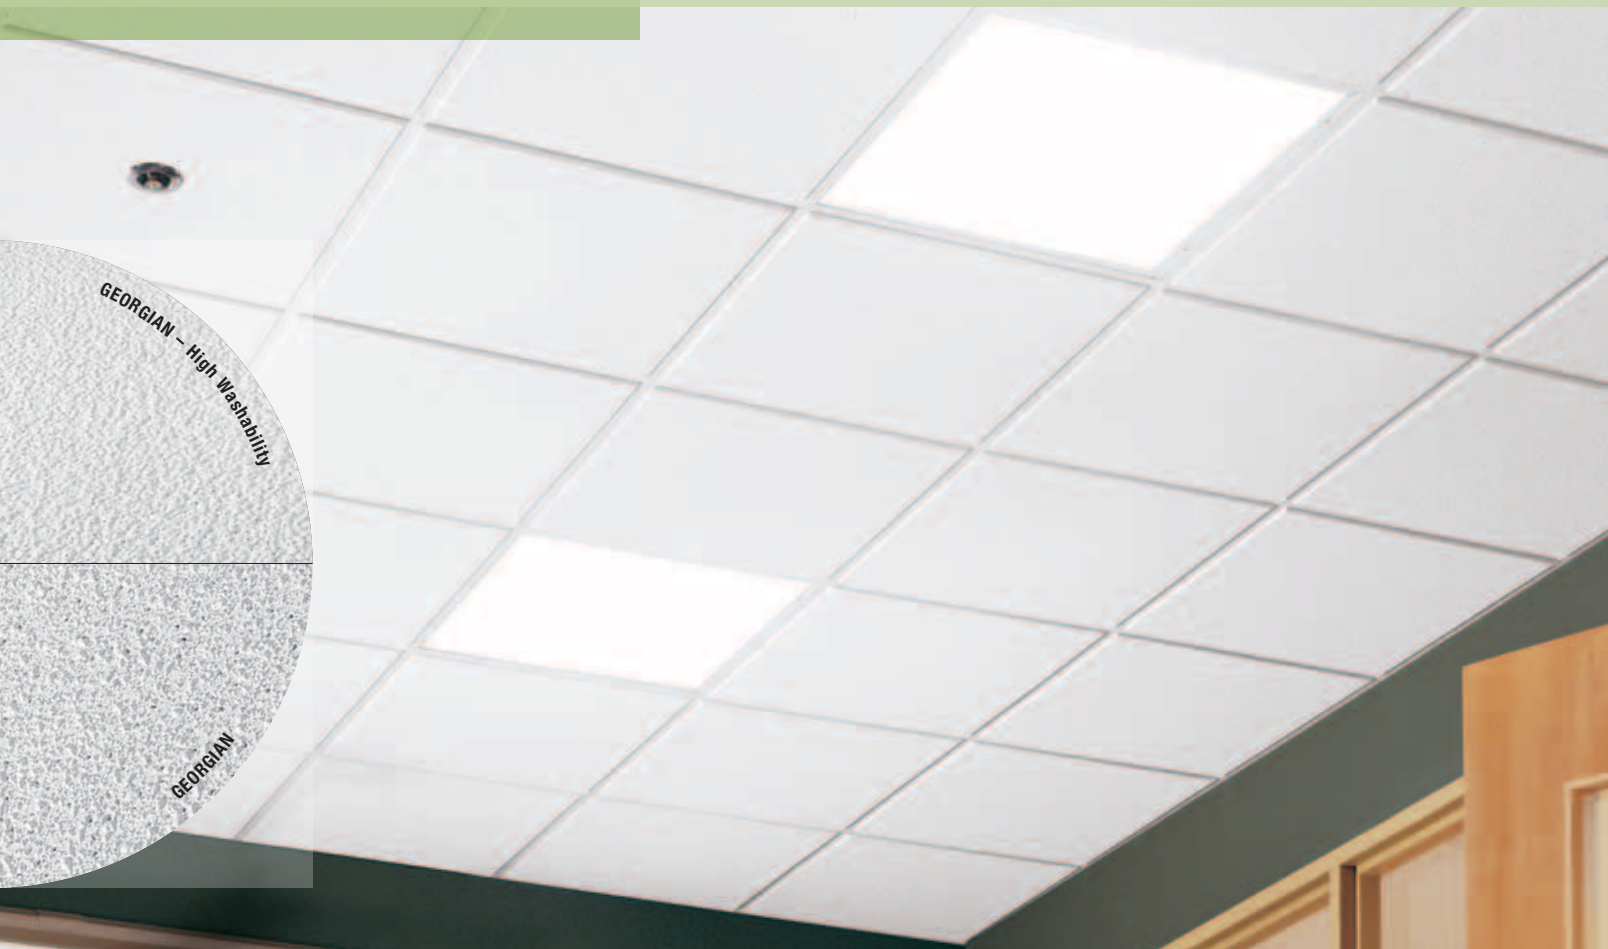

Georgian Beveled Tegular with Prelude® 15/16" Exposed Tee grid (Pg. 215)


Key Selection Attributes

- Unique spatter-painted visual
- Excellent sound absorption (items 795, 796, 1750)
- High Washability
 - Durable – Washable
 - Impact-resistant
 - Scratch-resistant
 - Scrubbable
- Meets USDA/FSIS guidelines for use in food processing establishments
- 30-Year Limited System Warranty against visible sag (excludes item 791), mold/mildew, and bacterial growth

Typical Applications

- Schools/classrooms
- Healthcare – assists in addressing HIPAA and FGI acoustical requirements (Items 795, 796 & 1750)
- Corridors/conference rooms
- Kitchen/food preparation (Items 793, 794, 828)
- Enclosed parking garages (Items 793, 794, 828)

Detail (Other Suspension Systems compatible. Refer to listing on page 170.)



Georgian
Beveled Tegular



Georgian
Beveled Tegular with
Prelude 15/16"
Exposed Tee grid



Georgian
Beveled Tegular with
Silhouette® 9/16"
Bolt-Slot grid 1/4" Reveal

Color



White (WH)

LEED® Credits

Energy	Waste Mgmt	Recycled Content	Local Materials	Renewable Materials	Daylight & Views
✓	✓	✓	✓	✓	✓
Location Dependent					

LEED for Schools

Acoustics	Low Emitting or CHPS
✓	✓


\$\$\$\$\$

Visual Selection

Performance Selection Dots represent highest level of performance.

Edge Profile	Suspension Detail Dwg. Pgs. 226-228	Item No.	Dimensions		UL Classified		Fire Rating	Light Reflect	Sag Resist	Anti-Microbial	Durable				Recycle Program
					Acoustics										
					NRC	CAC									
GEORGIAN															
9/16" Beveled Tegal	31-34, 54	1753 1753M	2' x 2' x 5/8" 600 x 600 x 15mm		0.55	35	Class A	0.86	HumiGuard+	BioBlock+	Wash	Scrub	Impact	Scratch	Yes
	1	764 764M	2' x 2' x 5/8" 600 x 600 x 15mm		0.55	33	Class A	0.86							
	1	763 763M	2' x 4' x 5/8" 600 x 1200 x 15mm		0.55	33	Class A	0.86							
	1	898	2' x 4' x 5/8"		0.55	35	Fire Guard	0.86							
	1	791 791M	30" x 5' x 3/4" 750 x 1500 x 19mm		0.55	33	Class A	0.86	Standard						
15/16" Beveled Tegal	12	1752 1752M	2' x 2' x 5/8" 600 x 600 x 15mm		0.55	35	Class A	0.86							
GEORGIAN – High Acoustics															
15/16" Square Lay-in	1	796 796M	2' x 2' x 3/4" 600 x 600 x 19mm		0.65	35	Class A	0.86							
	1	795 795M	2' x 4' x 3/4" 600 x 1200 x 19mm		0.65	35	Class A	0.86							
15/16" Angled Tegal	7	1750 1750M	2' x 2' x 3/4" 600 x 600 x 19mm		0.65	38	Class A	0.86							
GEORGIAN – High Washability, Unperforated															
15/16" Square Lay-in	1	794 794M	2' x 2' x 5/8" 600 x 600 x 15mm		N/A	33	Class A	0.88							
	1	793 793M	2' x 4' x 5/8" 600 x 1200 x 15mm		N/A	33	Class A	0.88							
	1	828	2' x 4' x 5/8"		N/A	35	Fire Guard	0.88							

Suspension Systems



Item 1753-CAC 33 on 9/16" Interlude, Sonata, Suprafine

Physical Data

Material

Wet-formed mineral fiber

Surface Finish

793, 794, 828: factory-applied vinyl latex paint
All other items: factory-applied latex paint

Fire Performance

ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less.
Smoke Developed Index 50 or less. (UL labeled)
Fire Guard™: A fire resistive ceiling when used in applicable UL assemblies

ASTM E1264 Classification

Type III, Form 2, Pattern C E
Items 794, 793, 828 –
Type IX, Form 2, Pattern G
Fire Class A

Sag Resistance

HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.

VOC/Formaldehyde Emissions

(Excludes items 796, 795, 1750)
Meets CA Dept. of Health Services Standard Practice for the testing of VOC Emissions and is listed on CHPS High Performance Products Database for Low-Emitting Materials.

(Items 796, 795, 750)

Meets CA Dept. of Health Services Standard Practice for the testing of VOC Emissions depending on ceiling use and building parameters. Specific project data is required to evaluate performance.

Anti Mold/Mildew & Bacteria

BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of

mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

Insulation Value

R Factor - 1.6 (BTU units)
R Factor - 0.28 (Watts units)

30-Year Performance Guarantee & Warranty Information

See warranty details in the back of this catalog

Weight; Square Feet/Carton

763, 793 – 0.67 lbs/SF; 96 SF/ctn
764, 794, 1752, 1753 – 0.72 lbs/SF; 64 SF/ctn
791 – 0.76 lbs/SF; 75 SF/ctn
828, 898 – 1.13 lbs/SF; 64 SF/ctn
796, 1750 – 1.31 lbs/SF; 48 SF/ctn
795 – 1.38 lbs/SF; 64 SF/ctn