

ULTIMA® Plank

Lay-in, Tegular, Shiplap

fine texture



Ultima Plank with Prelude® 15/16" Exposed Tee grid (Pg. 215); Axiom® Classic Trim (Pg. 236); Drywall Grid Soffit (Pg. 253)

Key Selection Attributes

- The only monolithic mineral fiber plank option
- Smooth, clean, durable finish – Washable, Scratch-resistant, Soil-resistant
- Excellent sound absorption
- Visual coordinates with Optima® for mixed (open/closed plan) applications
- Energy-saving, high light-reflective finish
- Compatible with the TechZone™ Ceiling Systems (Items 1980, 1981, 1982 only)
- 30-Year Limited System Warranty against visible sag, mold/mildew, and bacterial growth

Typical Applications


- Offices
- Healthcare – assists in addressing HIPAA and FGI acoustical requirements
- Classrooms
- Corridors
- Lobbies/reception areas
- Department stores/retail

Color




White (WH)


Detail (Other Suspension Systems compatible. Refer to listing on page 192.)




Ultima Plank
Lay-in



Ultima Plank
Beveled Tegular



Ultima Plank
Shiplap Long Edge/
Beveled Tegular Short Edge



Ultima Plank
Shiplap Long Edge/
K2C2 Short Edge



Ultima Plank
Square Lay-in
with Prelude 15/16"
Exposed Tee grid



Ultima Plank
Beveled Tegular
with Suprafine® 9/16"
Exposed Tee grid



Ultima Plank
Shiplap with
Prelude 15/16"
Exposed Tee grid

ULTIMA® Plank

Lay-in, Tegal, Shiplap

fine texture

Recycled Content: 70%

armstrong.com/greengenie

LEED® Credits

Energy	Waste Mgmt	Recycled Content	Local Materials	Renewable Materials	Daylight & Views
✓	✓	✓	✓	✓	✓
Location Dependent					

LEED for Schools

Acoustics	Low Emitting or CHPS
✓	✓

\$\$\$\$\$


Visual Selection

Performance Selection

Dots represent highest level of performance.

Edge Profile	Suspension Detail Dwg. Pgs. 226-228	Item No.	Dimensions	UL Classified	Acoustics NRC	CAC	Fire Rating	Light Reflect	Sag Resist	Anti-Microbial	Durable	Recycle Program
ULTIMA Plank Lay-in												
15/16" Square Lay-in	1	1980	2' x 6' x 3/4"		0.70	35	Class A	0.90	HumiGuard+	BioBlock+	Wash Impact Scratch Soil	Yes
	1	1984	2' x 5' x 3/4"		0.70	35	Class A	0.90	.	.	.	.
ULTIMA Plank Tegal												
9/16" Beveled Tegal	31-34, 54	1982	2' x 6' x 3/4"		0.70	35	Class A	0.90	.	.	.	.
	31-34, 54	1986	2' x 5' x 3/4"		0.70	35	Class A	0.90	.	.	.	.
15/16" Beveled Tegal	12	1981	2' x 6' x 3/4"		0.70	35	Class A	0.90	.	.	.	.
	12	1985	2' x 5' x 3/4"		0.70	35	Class A	0.90	.	.	.	.
ULTIMA Plank Shiplap												
15/16" SL2 Long/K2C2 Short	65	1983	2' x 6' x 3/4"		0.70	35	Class A	0.90	.	.	.	.
	65	1987	2' x 5' x 3/4"		0.70	35	Class A	0.90	.	.	.	.
15/16" SL2 Long/Bev Teg Short	64	1988	2' x 6' x 3/4"		0.70	35	Class A	0.90	.	.	.	.
	64	1989	2' x 5' x 3/4"		0.70	35	Class A	0.90	.	.	.	.

Suspension Systems

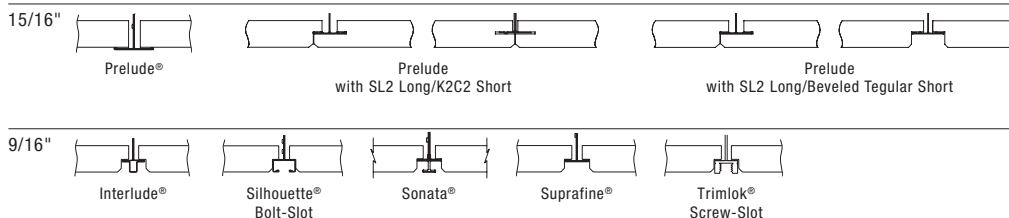

Physical Data

Material
Wet-formed mineral fiber with DuraBrite® acoustically transparent membrane

Surface Finish
DuraBrite with factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

ASTM E1264 Classification
Type IV, Form 2, Pattern E, Fire Class A

Sag Resistance
HumiGuard® Plus – superior resistance to sagging in high humidity conditions up to, but not including, standing water and outdoor applications.

VOC/Formaldehyde Emissions
Meets CA Dept. of Health Services Standard Practice for the testing of VOC Emissions and is listed on CHPS High Performance Products Database for Low-Emitting Materials.

Anti Mold/Mildew & Bacteria
BioBlock® Plus contains an anti-microbial treatment and provides guaranteed resistance against growth of mold/mildew and Gram-positive and Gram-negative odor/stain-causing bacteria for 30 years.

Insulation Value
R Factor – 2.2 (BTU units)
R Factor – 0.39 (Watts units)

30-Year Performance Guarantee & Warranty Information
See warranty details in the back of this catalog

Weight: Square Feet/Carton
1980, 1981, 1982, 1983, 1988 – 1.08 lbs/SF; 72 SF/ctn
1984, 1985, 1986, 1987, 1989 – 1.08 lbs/SF; 80 SF/ctn