

LEUCOS USA LED Housing 3 1/2"

LEU-NWLEDLU2

NEW CONSTRUCTION HOUSING WITH ELECTRONIC DRIVER




	YES
Damp Location	
	3000°K 18W (Requires LEU-LED-013V2 LED module)
LED	
	120 Volts 277 Volts
Voltage	
	Dimmable Electronic Driver (consult factory for a list of compatible dimmers)
Driver	
	T°C 70°C No 021
Thermal Protector	
	3 5/8" (92 mm)
OD Cut	
	Overall Dimensions: Length: 13 1/2" (343 mm) With bars: 15 3/8" (391 mm) Width: 7 3/8" (187 mm) With bars: min 10" (254 mm) Height: 5 1/2" (140 mm)
Dimensions	

COMPATIBLE LED MODULE

LEU-LED-013V2

LED MODULE COMPATIBLE TRIMS

DROP	IGEA 2	ONY
POLAR	ISIDE 2	VAN 2
DAY	STAR	

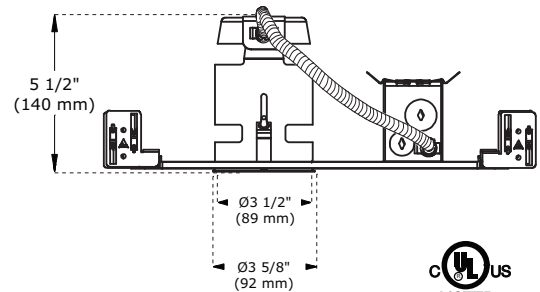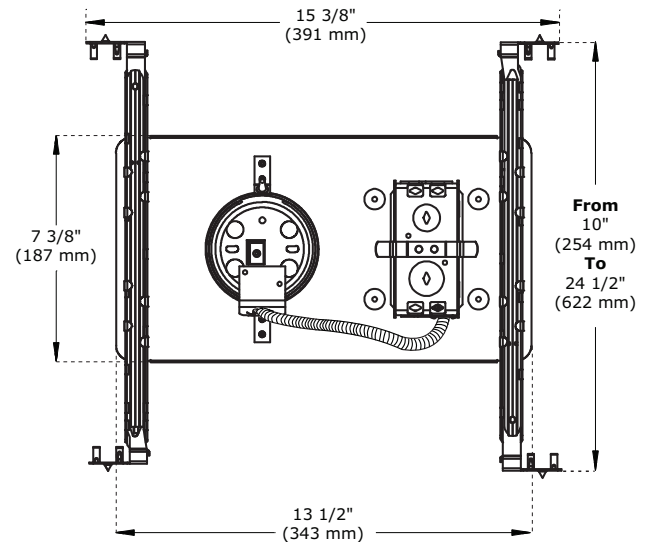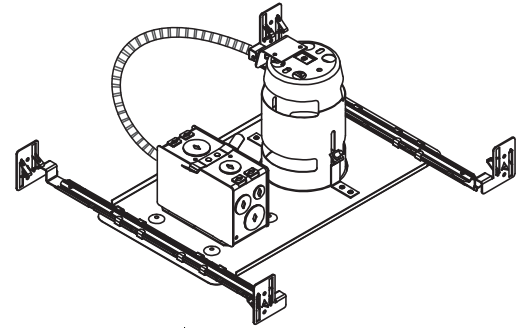

Project _____

Representative _____



11 Mayfield Avenue Edison, NJ 08837
t 732.225.0010 f 732.225.0250
www.leucosusa.com

TECHNICAL SPECIFICATIONS

0.051" (1.3 mm) thickness galvanized steel
Below-ceiling accessible
Hooks: Patents #CAN 2,088,648 and #USA 5,377,088
Installs on ceiling up to to 1 1/2" thick
Perfect fit into ceiling
No light leakage
All parts of the housing must be **at least 3"** (76 mm) from insulation (if applicable)