

LEUCOS USA LED Housing 3 1/2"

LEU-RELEDLU2

REMODEL HOUSING
WITH ELECTRONIC DRIVER




	YES
	3000°K 18W (Requires LEU-LED-013V2 LED module)
	120 Volts 277 Volts
	Dimmable Electronic Driver (consult factory for a list of compatible dimmers)
	T°C 70°C No 021
	3 5/8" (92 mm)
	Overall Dimensions: Length: 13 3/4" (349 mm) Width: 4 3/4" (121 mm) Height: 7 1/16" (179 mm)

COMPATIBLE LED MODULE

LEU-LED-013V2

LED MODULE COMPATIBLE TRIMS

DROP	IGEA 2	ONY
POLAR	ISIDE 2	VAN 2
DAY	STAR	

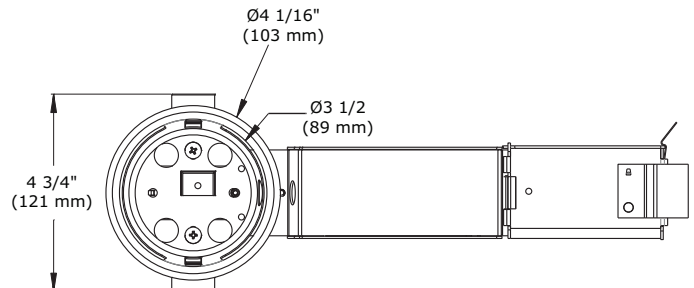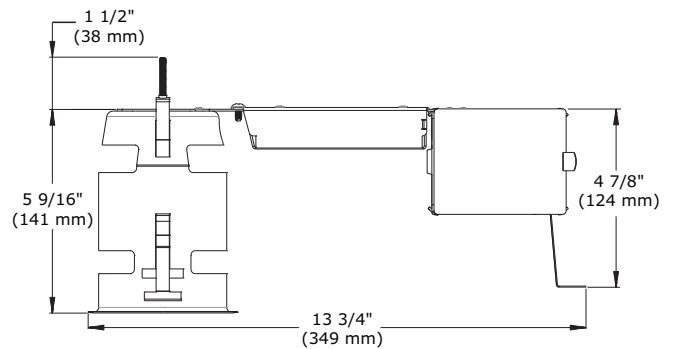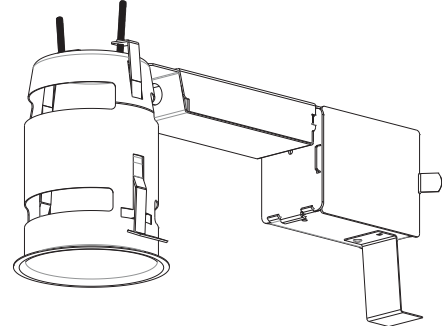

Project _____

Representative _____



ITRE

LUXIT
LIGHT THAT WORKSFDV
collection

LEUCOS USA BRANDS

TECHNICAL SPECIFICATIONS

0.051" (1.3 mm) thickness galvanized steel
Below-ceiling accessible
Hooks: Patents #CAN 2,088,648 and #USA 5,377,088
Installs on ceiling up to to 1 1/2" thick
Perfect fit into ceiling
No light leakage
All parts of the housing must be **at least 3"** (76 mm) from insulation (if applicable)