



**forbo**

FLOORING SYSTEMS

**colorex<sup>®</sup>**  
concept

PROJECT VINYL

creating better environments



## High performance, low maintenance in commercial and public environments


In office environments castor chairs put floor coverings under severe mechanical stress, making resistance to indentation a prime concern. And often floor coverings must also be suitable for installation on raised floor panels.

In schools wear resistance and durability of floor coverings are vital, while the colours and designs must help create a pleasant setting. The same criteria also apply to fashion shops and stores where customers must feel comfortable and at ease.

In all these environments Colorex® Concept tiles with high performance coating provide the ideal solution, thanks to the quality of its raw materials and its high pressure manufacturing process. Its high density and homogeneous structure delivers outstanding high traffic performance, excellent slip resistance and high ignition resistance.

# colorex<sup>®</sup> concept

A

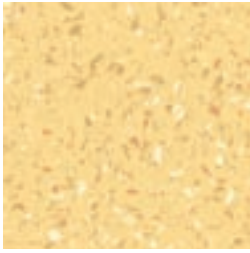


20 02 88 break  
● Welding rod 15 09 88



20 02 87 87 reggae  
● Welding rod 15 09




20 02 86 latino  
● Welding rod 15 09 86

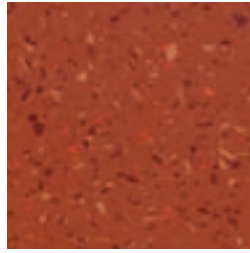


20 02 85 ethnic  
● Welding rod 15 09 85




20 02 84 flamenco  
● Welding rod 15 09 84

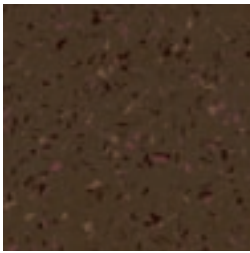


20 02 83 afro  
● Welding rod 15 09 83

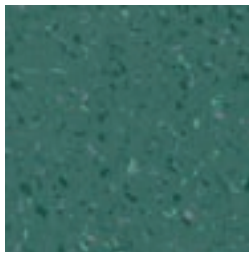


20 02 80 jazz  
● Welding rod 15 09 80

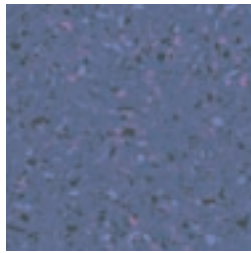


20 02 82 twist  
● Welding rod 15 09 82

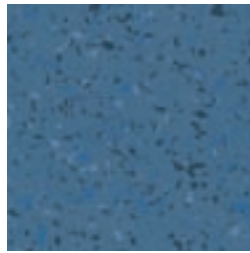


20 02 81 blues  
● Welding rod 15 09 81

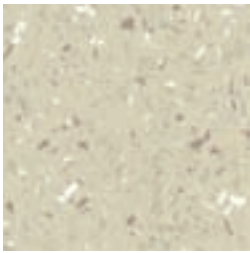


20 02 52 lambada  
● Welding rod 15 09 52

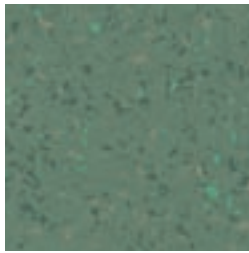


20 02 55 tango  
● Welding rod 15 09 55

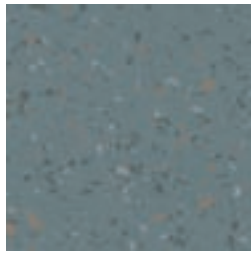


20 02 58 walzer  
● Welding rod 15 09 58

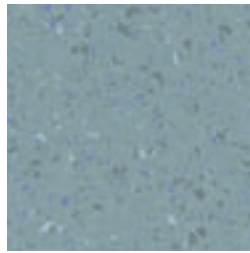


20 02 61 fusion  
● Welding rod 15 09 61

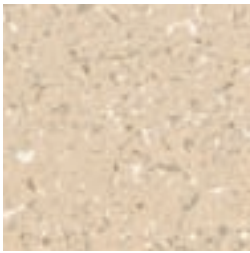


20 02 51 salsa  
● Welding rod 15 09 51

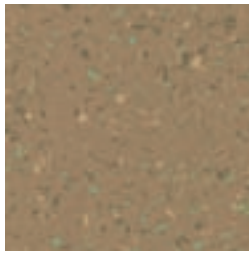


20 02 54 samba  
● Welding rod 15 09 54

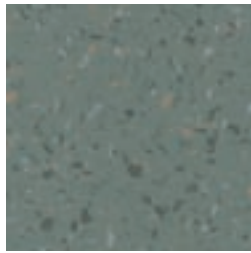

20 02 57 country  
● Welding rod 15 09 57

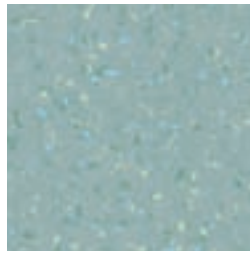


20 02 60 disco  
● Welding rod 15 09 60

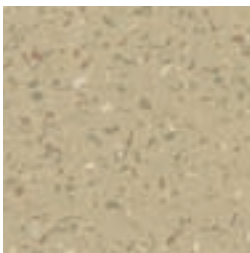

20 02 50 mambo  
● Welding rod 15 09 50



20 02 53 rumba  
● Welding rod 15 09 53

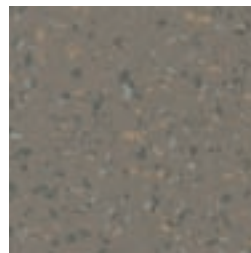


20 02 56 rondò  
● Welding rod 15 09 56



20 02 59 dance  
● Welding rod 15 09 59

B

C

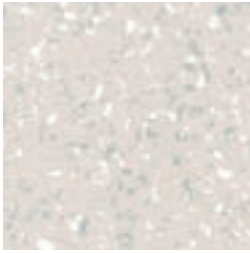

20 02 89

pop

● Welding rod 15 09 89



20 02 72

celtic


● Welding rod 15 09 72



20 02 71

new age

● Welding rod 15 09 71

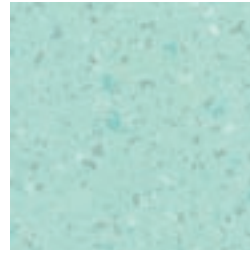


20 02 70

mystic

● Welding rod 15 09 70


D

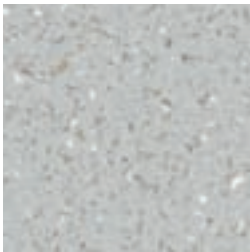

20 02 93

techno


● Welding rod 15 09 05

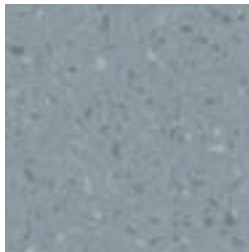

20 02 92

metal


● Welding rod 15 09 42

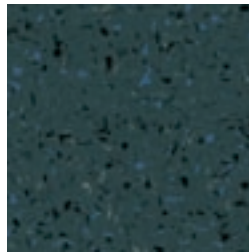

20 02 91

rock

● Welding rod 15 09 91

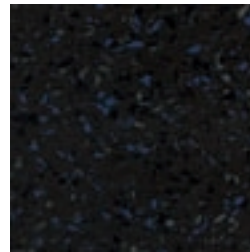

20 02 90

funk

● Welding rod 15 09 09


## Colours made more specific

Colours in **group A** have warm tones, with hues of yellow and red dominating. And dark brown fills a special role, embodying all that is floor-like, earthy, load-bearing.

**Group B** is the collection's largest colour group. It is marked by colour nuances reminiscent of stones and sand – travertine, burnt clay, ochre, green slate – that conceal visible dirt.


Hygiene and freshness are recalled by the colours in **group C** – the ideal choice for applications like doctors' practices, clinics and laboratories.

**Group D** is objective, sober, but with hidden charm. Black, anthracite, grey at first glance, as the angle and mood of the light changes the colours take on new life, with sparkling blue particles appearing out of the black.

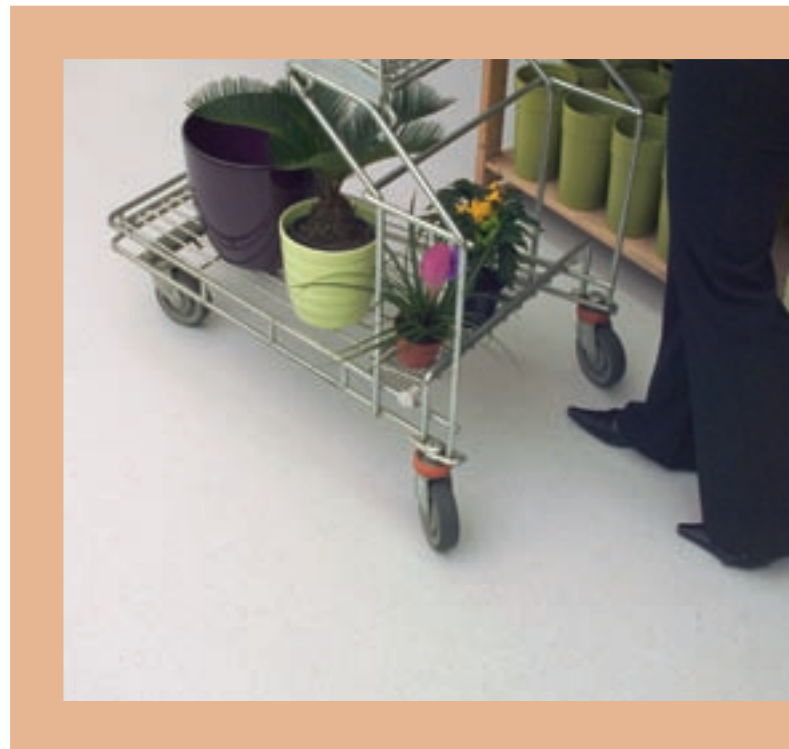

# New coating for easier cleaning and maintenance

Colorex® Concept now features a new and durable coating that provides a very durable finish for simpler than ever cleaning and maintenance and a better long term appearance. Laboratory testing showed that Colorex® Concept with the new coating outperformed competitive products.

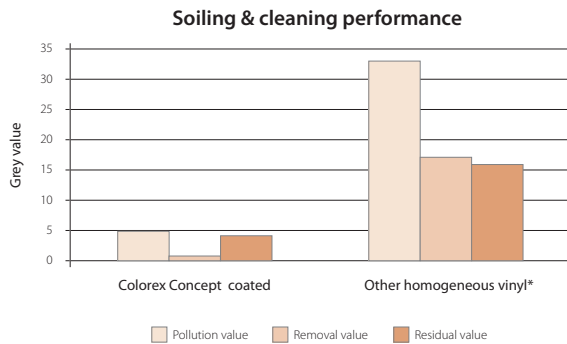

Source: laboratory Forbo Flooring 2007

\* based on multiple tests on benchmarked competing products

## Saving time and money

Routine maintenance of Colorex® Concept should consist in sweeping the floor with impregnated one-way tissues or spray buffing with a red pad at low speed, using a specific, neutral and wax-free cleaning solution. Spray buffing is also the ideal solution for raised access floors.














If the wet method is preferred for routine maintenance, damp mop the floor with a neutral detergent only and rinse well. For large areas with heavy traffic, the use of a scrubber drier machine with a specific detergent is indicated. Please refer to the technical manuals of Forbo Flooring Systems for complete care and maintenance instructions as well as for extraordinary or restorative maintenance procedures.



For more information on Forbo and the FloorCare system please visit [www.forbo-flooring.com](http://www.forbo-flooring.com)





## Technical specifications

This heterogeneous project vinyl meets the requirements of EN 649

	Total Thickness	EN 428	2.0 mm
	Commercial very heavy	EN 685	Class 34
	Industrial heavy	EN 685	Class 43
	Collection size		29
	Dimensions (length x width)	EN 427	610 mm x 610 mm
	Total weight	EN 430	3.0 kg/m <sup>2</sup>
	Abrasion resistance	EN 660-1	Group M
	Slip resistance	DIN 51130	R9
	Castor chair continuous use	EN 425	No effect
	Indentation-residual	EN 433	0.035 mm, typical value
	Light fastness	ISO 105-B02	> 6
	Resistance to chemicals	EN 423	Very good
	Dimension stability	EN 434	0.05%

### Colorex meets the requirements of EN 14041

CE  
14041

	Reaction to fire	EN 13501-1	B <sub>f1</sub> s1
	Slip resistance	EN 13893	DS: 0.6
	Body voltage	EN 1815	≤ 2 kV
	Thermal conductivity	EN 12524	0.28 W/m k

Forbo Flooring B.V.  
P.O. Box 13  
1560 AA Krommenie  
The Netherlands  
Tel. +31 75 647 74 77  
Fax +31 75 647 77 01  
contact@forbo.com  
www.forbo-flooring.com

