

Disco 7030

Studio 54 2966

Specifications

Contents

100% polypropylene

Weight

12.8 ± 1.0 oz./lin. yd.

Width

66" min. useable

Repeat

.1" vertical, none horizontal

Treatment

polyester binder

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May be cleaned with a 4:1 water-to-bleach solution. Rinse well after cleaning.

Performance



Breaking Strength (ASTM D5034)

100 lbf min. min. warp and 250 lbf min. min fill

Tear (ASTM D2261)

25 lbf min. min. warp and 55 lbf min. min fill

Colorfastness to light (AATCC 16 Option 3)

Grade 4 min. at 40 hours

Colorfastness to crocking (AATCC 8)

Grade 4 min. dry & Grade 3 min. wet

Flammability


ASTM E84 Class I or A

NRC of anechoic termination


1.00

NRC of fabric in front of anechoic termination

.95

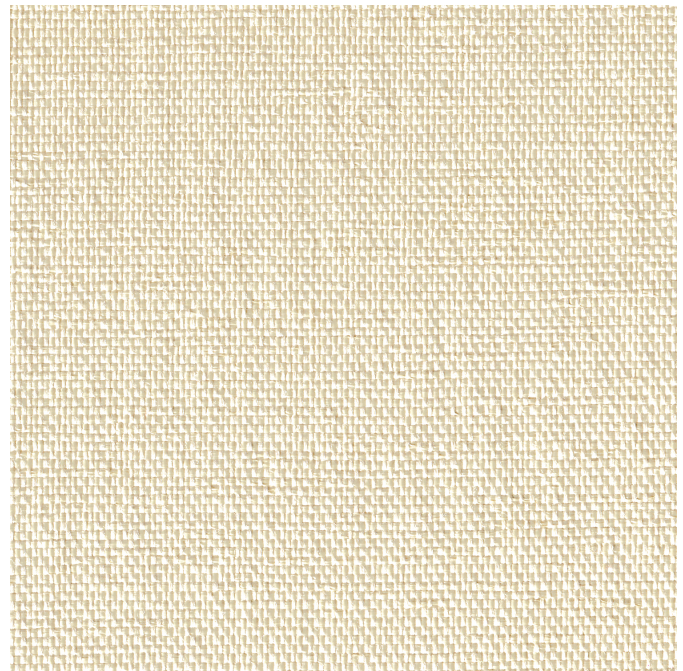

The plot below summarizes impedance tube measurements of absorption of an anechoic termination and various fabrics in front of the anechoic termination.

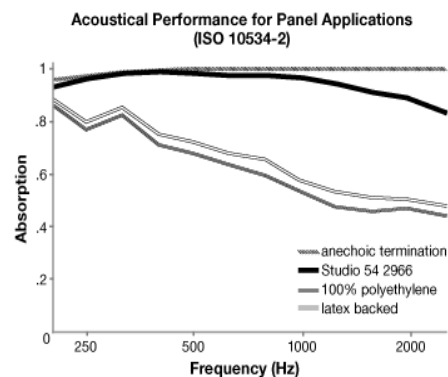

Guilford of Maine