











# **Promessa**®











































































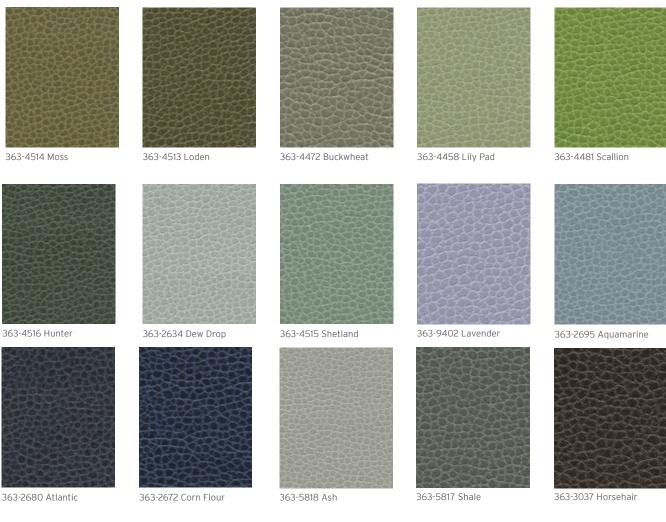



363-5845 Ebony





# Promessa<sup>®</sup> Collection

















#### **Durable, Luxurious, Antimicrobial Protection**

Promessa combines extreme durability with naturally bonded with an EPA registered, silver-based antimicrobial agent, making it ideal for healthcare and other high wear applications. It meets or surpasses industry wear standards including bond strength, seam strength and tear strength. Promessa exceeds 400,000 double rubs on the Wyzenbeek abrasion test method showing no wear and tear—that's 13X heavy-duty industry standards.

#### You've Only Touched the Surface

Promessa stays cool to the touch, even when exposed to sunlight. Soft and supple, Promessa is tough enough to withstand kids and pets. Because it's inherently stain-resistant, no toxic aftercare is required to keep Promessa looking its best.

#### **Earth Friendly**

- Greenguard® Certified
- No PVC (Polyvinyl Chloride)
- No POPs (Persistent Organic Pollutants)
- No PBDEs (Polybrominated Diphenyl Ethers)
- No HFRs (Halogenated Flame Retardants)
- Meets the most stringent VOC standards
- No Plasticizers, Heavy Metals, Stabilizers, Phthalates or Bisphenol A (BPA)
- No toxic by-products
- Over 99% of solvents recaptured and recycled
- ISO 9001 Certified Mill.

#### **Maintenance & Care Instructions**

Keep Ultrafabrics, LLC brand surfaces looking great by routine and proper maintenance. Clean regularly to prevent excessive dirt from accumulating. Follow these guidelines to extend the life of the fabric:

- Clean regularly with soap and water
- Wipe up spills as soon as they occur
- Remove stains with alcohol-based cleaners like Fantastik<sup>®</sup> and Formula 409®
- Disinfect using a 5:1 water/bleach solution or a commonly used healthcare disinfectant, such as CaviCide® and Virox®
- Thoroughly rinse all solution residue with water
- Air dry

## **SPECIFICATIONS**

WEIGHT:		101/110
WEIGHT:	65% POLYESTER, 35% RAYON E	3ACKING
WEIGHT:	APPROX. 12 OZ. PER SQUARE YD (APPROX. 410 GRAMS PER SQUARE METRE)	
	APPROX. 18 OZ. PER LINEAR YD (APPROX. 560 GRAMS PER LINE	AR METRE)
THICKNESS:	APPROX. 1.1 MM	
WIDTH:	54 INCHES / 137 CENTIMETRES	
PUT-UP:	APPROX. 30 YDS / 27.5 METRES R.O.T.	
CHARACTERISTICS (	MEETS OR EXCEEDS)	
ABRASION:	ASTM D 4157 / 400,000 DOUBLE RUBS* BS 2543 / 180,000 RUBS** *WYZENBEEK **MARTINDALE	
TENSILE STRENGTH:	ASTM D 1117	
TEAR STRENGTH:	ASTM D 1117	
DIMENSIONAL CHANGE:	ASTM D 3597	
SEAM STRENGTH:	ASTM D 751	
STRETCH & SET:	SAE J855	
ANTIMICROBIAL	ASTM E 2180	
COLORFASTNESS		
CROCKING:	AATCC 8, CLASS 5 DRY & 5 WET	
LIGHT	AATCC 16E, AATCC 16A, CLASS 4 – 5 ISO 105 - BO2 : 1999 GRADE 7/8	
GAS:	AATCC 23, CLASS 5	
OZONE:	AATCC 109, CLASS 5	
F/R RATING: (HFR FR	REE)	
	ASTM E 84 (ADHERED) CA 117 E FMVSS 302 & 95/28 ANNEX IV NFPA 260 UFAC	CLASS A CLASS 1 PASS CLASS 1 CLASS 1

· CAN BE TREATED TO MEET FAR SPECIFICATIONS.

 THIS FABRIC, WHEN TREATED AND/OR USED WITH OTHER COMPATIBLE FURNITURE COMPONENTS, HAS BEEN SHOWN TO PERFORM WELL UNDER THE FIRE TEST CONDITIONS OF CALIFORNIA TECHNICAL BULLETIN 133, BS 5852 PT 0, 1 & 5 (CRIB 5), IMO A.652 (16), BS 7175 AND BS 5867 PART 2 TYPE B.

For more detailed information, visit us on the web at www.ultrafabricsllc.com





## **ULTRA SURFACES. ULTRA RELEVANT.**

Ultrafabrics, LLC | Hudson Point, 303 South Broadway | Tarrytown, NY 10591 | USA | T 914.460.1730 | F 914.631.3572 | www.ultrafabricsllc.com Ultrafabrics Europe Ltd. | 19 The Warren, East Goscote | Leicestershire, LE7 3XA | United Kingdom | T +44.116.260.9625 | ufe@ultrafabricsllc.com  $\textbf{Made in Japan.} \ \ \textbf{Ultraleather}^{\text{\tiny{TM}}}, \textbf{Brisa}^{\text{\tiny{S}}} \ \text{and Promessa}^{\text{\tiny{S}}} \ \text{are trademarks of Ultrafabrics, LLC.}$ 



