



PRODUCT SHEET

AMMA 7048

70 x 48 x 21

Redefined massage. Ideal comfort.



© BAINULTRA®

FEATURES	
Installation type	Drop-in
No. of bathers	2
Raised seats	2
Heated backrests (Independently controlled)	2
Heated headrests	2
Inverted V	2
Armrests	2
Grab bars (color match)	2
Control	MiaPlus
ThermoMasseur® bath	\$
Soaker bath	N/A

THERAPIES	
Chromatherapy 3-LED	\$
Sound Therapy (Euphonia™ System)	\$
COLORS	
Standards	
White	Bone
Biscuit	Almond
Optionals	
Black	Mexican sand
Innocent blush	Cashmere
Sandbar	Grey

WARRANTY	
Controls*	5 years
Bath & turbine*	20 years
*Some restrictions apply www.bainultra.com/warranty	



IMPORTANT: KEEP THE ORIGINAL. PLEASE MAKE COPIES.

AMMA®: AMMA 6030, AMMA 6032, AMMA 6036, AMMA 6636, AMMA OVAL 6638, AMMA 6060, **AMMA 7048**, AMMA 7236, AMMA 7242, AMMA OVAL 7242, AMMA OVAL 7242 FREESTANDING

BainUltra®

The quest for your wellness™
www.bainultra.com


AMMA 7048 70 x 48 x 21

ACCESSORIES - OPTIONAL

Skirts	Littora \$	Elegance \$
Clear acrylic grab bars	With Chrome, Brass or Brushed nickel inserts \$	
Drain & overflow	D-11 (22" - 27")	
	- Chrome	\$
	- White, Biscuit, Bone	\$
	- Brass	\$
	- Brushed nickel, Polished nickel, Oil-rubbed bronze	\$

Control	MiaMulti \$
Others	- Optional tile flange. \$ (specify right or left) - Increase your comfort choices with a third backrest offering a variation in shape and incline so you can enjoy an additional massage. Third backrest not heated.

TOTAL PRICE \$

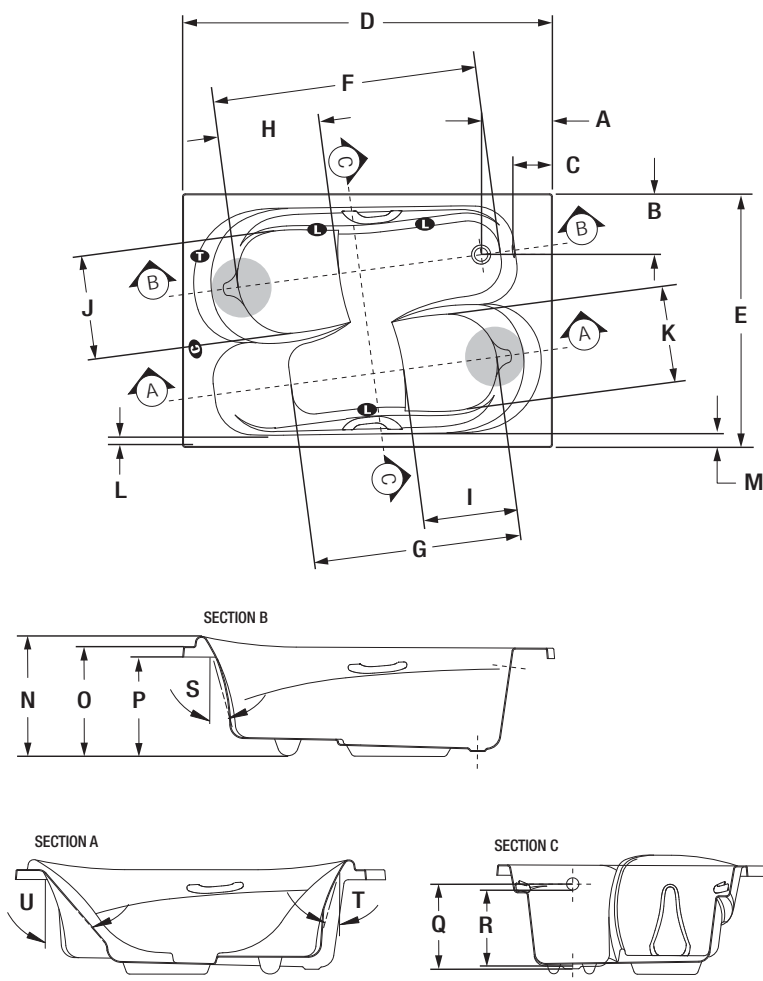

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	13 1/2"
B	Outside edge to center drain	11 1/2"
C	Outside edge to overflow	7 3/8"
D	Total length	69 3/4"
E	Total width	48 1/8"
F	Bathing well length	50 3/4"
G	Bathing well length	40 7/8"
H	Raised seat length	19 1/4"
I	Raised seat length	17 7/8"
J	Raised seat width	19 1/2"
K	Raised seat width	18 1/2"
L	Deck width (narrowest point)	1 7/8"
M	Deck width (widest point)	2 7/8"
N	Total height to headrest	22 1/2"
O	Height from bottom of tub to top deck	20 1/2"
P	Height from bottom of tub to bottom of lip	18 1/2"
Q	Height from drain to center of overflow	16 3/8"
R	Maximum water level	14 3/4"
S	Slope of backrest	16°
T	Slope of backrest	16°
U	Slope of backrest	41°

T Indicates turbine position
L Indicates LED light position
C Indicates control position when factory-installed

AMMA 7048 TECHNICAL SPECIFICATIONS

Jets	79
US gallons	75
Imp. gallons	62
Approx. shipping weight	215 lbs
Turbine power	755 W
Air heater	1000 W

Hot water supply required	Should be 70% of water capacity of tub or greater.
Turbine access	Must be at least 18" X 22" to access the pump. Must be connected to a 20 A, 120 V, 60 Hz, protected by a ground-fault circuit interrupter (GFCI) on a dedicated line.
Standards	All BainUltra products meet and/or exceed the highest quality and certification standards. For further details about BainUltra's product standards, please go to the following link: www.bainultra.com/standards .
Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation).	

1 800 463.2187 | From 8 a.m. to 8 p.m. Monday to Thursday (EST) . From 8 a.m. to 5 p.m. on Friday (EST)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.