



PRODUCT SHEET

AYOURA 7238 (FREESTANDING)

72 x 38 x 27

The most advanced ThermoMasseur®.



© BAINULTRA®

FEATURES

Installation type	Freestanding
No. of bathers	1
Raised seat	1
Heated backrest	1
Heated headrest	1
Inverted V	1
3-level footrest	Included
Armrests	2
Grab bars (color match)	2
Drain & overflow	Inst. & incl.
Wooden insert	Incl.
Chromatherapy - LED	Incl.
Control	MiaMulti
ThermoMasseur® bath	\$
Soaker bath	N/A

THERAPIES

Sound Therapy (Euphonia™ System) \$

COLORS

Standards



White



Bone



Biscuit



Almond

Optionals



Black



Mexican sand



Innocent blush



Cashmere



Sandbar



Gray

Wooden insert



Wood

WARRANTY

Controls*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



IMPORTANT: KEEP THE ORIGINAL. PLEASE MAKE COPIES.

AYOURA 7238 (FREESTANDING) 72 x 38 x 27

ACCESSORIES - OPTIONAL


Clear acrylic grab bars With Chrome, Brass or Brushed nickel inserts \$

Other


Faucet area:
BainUltra® recommends choosing a faucet that is no higher than 4 5/8". This is the height clearance under the massage table when it is installed. If the faucet exceeds this height, it will not be possible to install the massage table.

TOTAL PRICE

\$

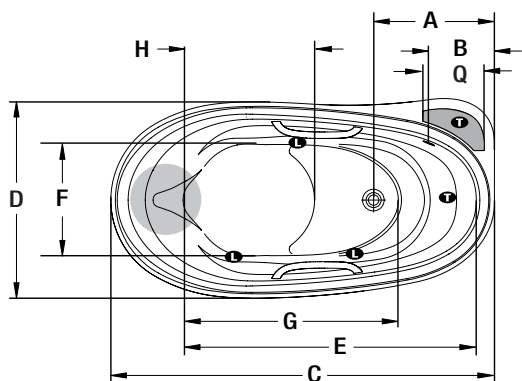


INCLUDING WOOD INSERT

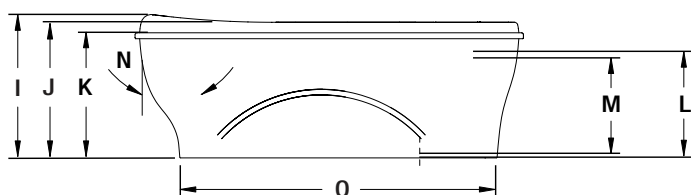

ACCESS PANEL FOR:

- TURBINE
- ELECTRICAL
- PLUMBING



LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	23 3/8"
B	Outside edge to overflow	12 3/4"
C	Total length	73 7/8"
D	Total width	37 3/4"
E	Bathing well length	53 5/8"
F	Bathing well width	20 7/8"
G	Bottom bathing well length	39 5/8"
H	Raised seat length	24 1/8"
I	Total height to headrest	27 1/4"
J	Height from bottom of tub to top deck	25 3/4"
K	Height from bottom of tub to bottom of lip	23 3/4"
L	Height from drain to center of overflow	19 1/2"
M	Maximum water level	17 3/4"
N	Slope of backrest	30°
O	Base length	63"
P	Base width	26"
Q	Plumbing zone length	11 3/4"

T Indicates turbine position
● Indicates heated backrest

L Indicates LED light position

AYOURA 7238 FREESTANDING TECHNICAL SPECIFICATIONS

Jets	59
US gallons	43
Imp. gallons	36
Approx. shipping weight	325 lbs
Turbine power	755 W
Air heater	700 W

Hot water supply required

Should be 70% of water capacity of tub or greater.

Turbine access

Included in access panel.

Standards

All BainUltra products meet and/or exceed the highest quality and certification standards. For further details about BainUltra's product standards, please go to the following link: (www.bainultra.com/standards).

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation).

1 800 463.2187 | From 8 a.m. to 8 p.m. Monday to Thursday (EST) . From 8 a.m. to 5 p.m. on Friday (EST)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.