



PRODUCT SHEET

AYOURA 7836











78 x 36 x 27

The most advanced ThermoMasseur®.



© BAINULTRA®

FEATURES	
Installation type	Drop-in
No. of bathers	1
Raised seat	1
Heated backrest	1
Heated headrest	1
Inverted V	1
Armrests	2
Grab bars (color match)	2
Control	MiaMulti
ThermoMasseur® bath	\$
Soaker bath	N/A

THERAPIES	
Chromatherapy 3-LED	
Sound Therapy (Euphonia™ System)	\$
COLORS	
Standards	
	
White	Bone
	
Biscuit	Almond
Optionals	
	
	
	
Black	Mexican sand
Innocent blush	Cashmere
Sandbar	Grey

WARRANTY	
Controls*	5 years
Bath & turbine*	20 years
*Some restrictions apply www.bainultra.com/warranty	



IMPORTANT: KEEP THE ORIGINAL. PLEASE MAKE COPIES.

AYOURA®: AYOURA 7236, AYOURA 7238 FREESTANDING, AYOURA 7836, AYOURA 7838 FREESTANDING, MASSAGE TABLE

 **BainUltra®**
The quest for your wellness™
www.bainultra.com


AYOURA 7836 78 x 36 x 27

ACCESSORIES - OPTIONAL


Clear acrylic grab bars	With Chrome, Brass or Brushed nickel inserts	\$
Drain & overflow	D-12 (Ayouura®)	
	- Chrome	\$
	- White, Biscuit, Bone	\$
	- Brass	\$
	- Brushed nickel, Polished nickel, Oil-rubbed bronze	\$

Cutting template # 90000032

TOTAL PRICE \$

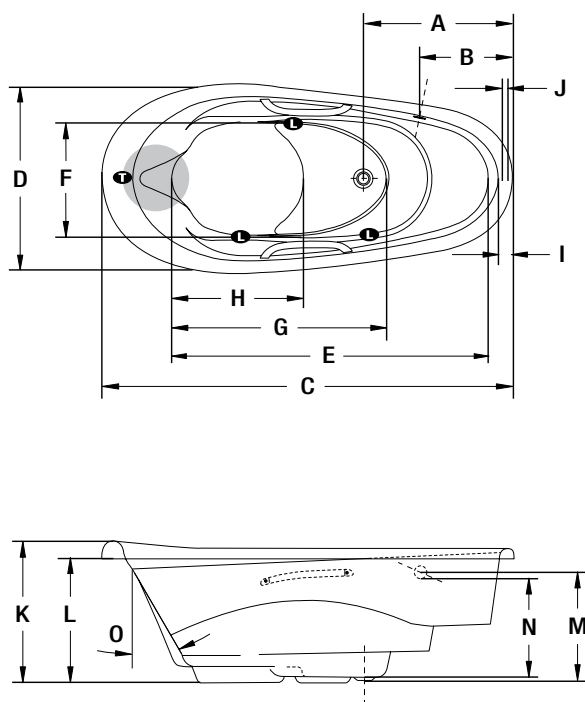

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	28 5/8"
B	Outside edge to overflow	19"
C	Total length	78"
D	Total width	36"
E	Bathing well length	59 1/2"
F	Bathing well width	20 7/8"
G	Bottom bathing well length	39 5/8"
H	Raised seat length	24 1/8"
I	Deck width at drain end	3 1/2"
J	Flat surface width	1"
K	Total height to headrest	26 1/2"
L	Height from bottom of tub to bottom of lip	23"
M	Height from drain to center of overflow	19 1/2"
N	Maximum water level	17 3/4"
O	Slope of backrest	30°

T Indicates turbine position
 Indicates heated backrest

L Indicates LED light position

AYOURA 7836 TECHNICAL SPECIFICATIONS

Jets	63	Hot water supply required	Should be 70% of water capacity of tub or greater.
US gallons	65	Turbine access	Must be at least 18" X 22" to access the pump. Must be connected to a 15 A. 120 V, 60 Hz, protected by a ground-fault circuit interrupter (GFCI) on a dedicated line.
Imp. gallons	54	Standards	All BainUltra products meet and/or exceed the highest quality and certification standards. For further details about BainUltra's product standards, please go to the following link: (www.bainultra.com/standards).
Approx. shipping weight	160 lbs	Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation).	
Turbine power	755 W		
Air heater	700 W		

1 800 463.2187 | From 8 a.m. to 8 p.m. Monday to Thursday (EST) . From 8 a.m. to 5 p.m. on Friday (EST)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.