



PRODUCT SHEET

# CELLA 7240

72 x 40 x 27  
Unique elegance.



© BAINULTRA®

## FEATURES

|                     |              |
|---------------------|--------------|
| Installation type   | Freestanding |
| No. of bathers      | 2            |
| Heated backrest     | 1            |
| Claw feet           | Included     |
| Control             | MiaMulti     |
| ThermoMasseur® bath | \$           |
| Soaker bath         | \$           |

## THERAPIES

Sound Therapy (Euphonia™ System) \$

## COLORS


### Standards



### Optionals



### Claw feet



## WARRANTY

|                 |          |
|-----------------|----------|
| Controls*       | 5 years  |
| Bath & turbine* | 20 years |

\*Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)



**IMPORTANT: KEEP THE ORIGINAL. PLEASE MAKE COPIES.**

BALNEO®: CELLA 6036, CELLA 7240, NAOS, SANOS

 **BainUltra®**

The quest for your wellness™  
[www.bainultra.com](http://www.bainultra.com)

# CELLA 7240 72 x 40 x 27

## ACCESSORIES - OPTIONAL



|                             |                                                                                                                               |                            |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------|----------------------------|
| <b>Drain &amp; overflow</b> | D-13 (Balneo)<br>- Chrome<br>- Brushed nickel, Polished nickel, Brass, Unplated<br>- Oil-rubbed bronze                        | \$<br>\$<br>\$             |
| <b>Towel bars</b>           | - Chrome, Unplated<br>- Brushed nickel, Polished nickel, Oil-rubbed bronze, Brass                                             | \$<br>\$<br>\$             |
| <b>For air supply only</b>  | Decorative pipe (1 1/2" x 6")<br>Decorative pipe (1 1/2" x 24")<br>Pipe concealer (3" x 5 1/4")<br>Elbow (45°)<br>Elbow (90°) | \$<br>\$<br>\$<br>\$<br>\$ |

### Others



- There is a height difference for the rolled deck (see drawing Detail A).
- Faucets must be freestanding or wall mounted.
- The turbine must be remotely installed.

### TOTAL PRICE

\$

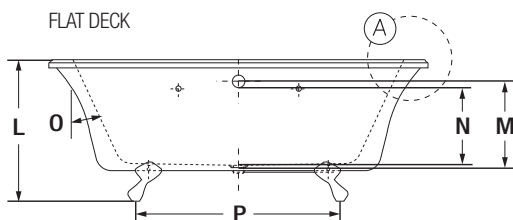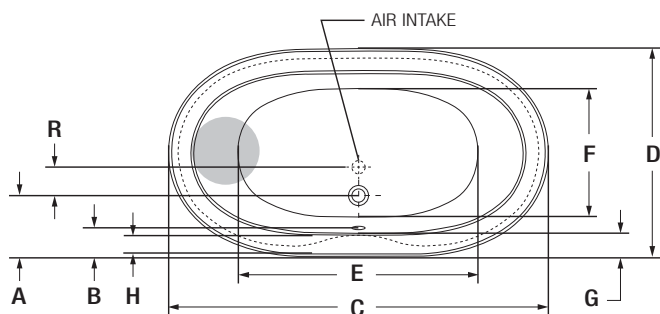

### ROLLED DECK



| LETTER | DESCRIPTION                                     | MEASURE |
|--------|-------------------------------------------------|---------|
| A      | Outside edge to center drain                    | 11 5/8" |
| B      | Outside edge to overflow                        | 5 3/8"  |
| C      | Total length                                    | 71 1/2" |
| D      | Total width                                     | 39 7/8" |
| E      | Bathing well length                             | 45 1/4" |
| F      | Bathing well width                              | 24"     |
| G      | Deck width                                      | 5"      |
| H      | Flat surface width                              | 3 1/4"  |
| I      | Rolled deck width                               | 5 5/8"  |
| J      | Height from bottom of lip to top deck           | 2 1/2"  |
| K      | Height from clawfoot to top of lip              | 27 3/4" |
| L      | Height from clawfoot to top of lip              | 26 3/4" |
| M      | Height from drain to center of overflow         | 16 1/2" |
| N      | Maximum water level                             | 14 3/4" |
| O      | Slope of backrest                               | 25°     |
| P      | Length between clawfeet                         | 35 3/8" |
| Q      | Width between clawfeet                          | 24 1/8" |
| R      | Distance from center air intake to center drain | 5 1/8"  |

● Indicates heated backrest

## CELLA 7240 TECHNICAL SPECIFICATIONS

|                                |         |
|--------------------------------|---------|
| <b>Jets</b>                    | 40      |
| <b>US gallons</b>              | 55      |
| <b>Imp. gallons</b>            | 41      |
| <b>Approx. shipping weight</b> | 297 lbs |
| <b>Turbine power</b>           | 755 W   |
| <b>Air heater</b>              | 700 W   |

|                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Hot water supply required</b>                                                                                                                                                                                                                                           | Should be 70% of water capacity of tub or greater.                                                                                                                                                                                                                     |
| <b>Turbine access</b>                                                                                                                                                                                                                                                      | Must be at least 18" X 22" to access the pump. Must be connected to a 15 A, 120 V, 60 Hz, protected by a ground-fault circuit interrupter (GFCI) on a dedicated line.                                                                                                  |
| <b>Standards</b>                                                                                                                                                                                                                                                           | All BainUltra products meet and/or exceed the highest quality and certification standards. For further details about BainUltra's product standards, please go to the following link: ( <a href="http://www.bainultra.com/standards">www.bainultra.com/standards</a> ). |
| Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ( <a href="http://www.bainultra.com/documentation">www.bainultra.com/documentation</a> ). |                                                                                                                                                                                                                                                                        |

1 800 463.2187 | From 8 a.m. to 8 p.m. Monday to Thursday (EST) . From 8 a.m. to 5 p.m. on Friday (EST)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.