



PRODUCT SHEET

SANOS 6636

66 x 36 x 24



© BAINULTRA

FEATURES

Installation type	- Freestanding - Theatre Stage™
Deck	- Flat - Rolled
No. of bathers	1
Heated backrest	1
Control	MiaMulti
ThermoMasseur® bath	\$

Soaker bath	\$
--------------------	----

THERAPIES

Sound Therapy (Euphonia® headset)	\$
Chromatherapy 2-LED	\$

COLORS

Standards



Optionals



WARRANTY

Controls*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



A BRAND NEW INSTALLATION OPTION THEATRE STAGE

The actual bathtub is set 10 inches deeper than its outer shell, creating the illusion of a tub molded into its surroundings. You'd swear the bath and the stage are one of a piece. Seamlessly integrated into its surroundings, this tub sets the scene for a welcoming, relaxing ritual in perfect harmony with the ambiance of the room.

IMPORTANT: KEEP THE ORIGINAL. PLEASE MAKE COPIES.

BainUltra®
The quest for your wellness®
www.bainultra.com

SANOS 6636 66 x 36 x 24

ACCESSORIES - OPTIONAL

Drain & overflow (Exposed)	D-13 (Balneo) - Chrome - Brushed nickel, Polished nickel, Brass, Unplated - Oil-rubbed bronze	\$ \$ \$ \$
For air supply only	Decorative pipe (1 1/2" x 6") Decorative pipe (1 1/2" x 24") Elbow (45°) Elbow (90°)	\$ \$ \$ \$


Others

- Faucets must be freestanding or wall mounted.
- The turbine must be remotely installed.
- There is a height difference for the rolled deck (see detail A.)
- Control must be wall-mounted.

TOTAL PRICE

\$

Freestanding installation

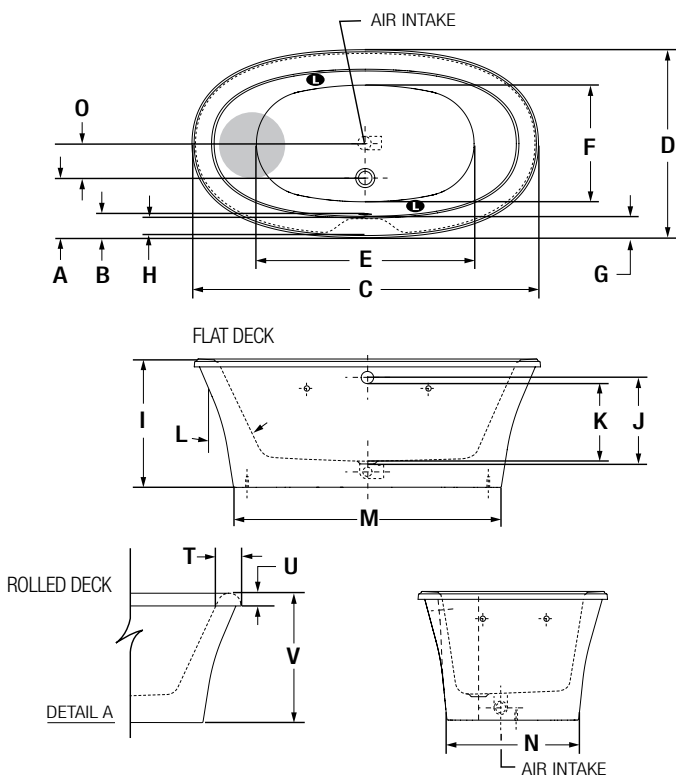


LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	11 1/2"
B	Outside edge to overflow	4"
C	Total length	66"
D	Total width	36"
E	Bathing well length	42 3/8"
F	Bathing well width	22 1/4"
G	Deck width	4 1/4"
H	Flat surface width	3"
I	Height from bottom of tub to top deck	24 1/2"
J	Height from drain to center of overflow	16 5/8"
K	Maximum water level	14 7/8"
L	Slope of backrest	25°
M	Base length	50 7/8"
N	Base width	24 7/8"
O	Distance from center air intake to center drain	3 1/4"
T	Rolled deck width	4 3/4"
U	Height from bottom of lip to top deck	2 1/2"
V	Height from bottom of tub to top deck	25 1/2"

● Indicates heated backrest

● Indicates LED light position

Theatre Stage™ installation

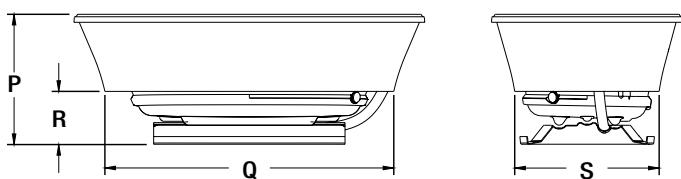

P	Height from bottom of tub to top deck	24 1/2"
Q	Base length	54 3/8"
R	Stage height	10"
S	Base width	27 1/8"

SANOS 6636 TECHNICAL SPECIFICATIONS

Jets	38	Hot water supply required	Should be 70% of water capacity of tub or greater.
US gallons	48	Turbine access	Must be at least 18" X 22" to access the turbine. Must be connected to a 15 A. 120 V, 60 Hz, protected by a ground-fault circuit interrupter (GFCI) on a dedicated line. Air vent necessary, 2" X 4" minimum.
Imp. gallons	40	Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentations).	
Approx. shipping weight	240 lbs		
Turbine power	755 W		
Air heater	700 W		

1 800 463.2187 | From 8 a.m. to 8 p.m. Monday to Thursday (EST) . From 8 a.m. to 5 p.m. on Friday (EST)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.