



PRODUCT SHEET

**SANOS 7240**

72 x 40 x 24



© BAINULTRA

## FEATURES

<b>Installation type</b>	- Freestanding - Theatre Stage™
<b>Deck</b>	- Flat - Rolled
<b>No. of bathers</b>	2
<b>Heated backrest</b>	1
<b>Control</b>	MiaMulti
<b>ThermoMasseur® bath</b>	\$

<b>Soaker bath</b>	\$
--------------------	----

## THERAPIES

<b>Sound Therapy (Euphonia® headset)</b>	\$
<b>Chromatherapy 3-LED</b>	\$

## COLORS

### Standards



### Optionals




## WARRANTY

<b>Controls*</b>	5 years
<b>Bath &amp; turbine*</b>	20 years

\*Some restrictions apply | [www.bainultra.com/warranty](http://www.bainultra.com/warranty)



### A BRAND NEW INSTALLATION OPTION THEATRE STAGE

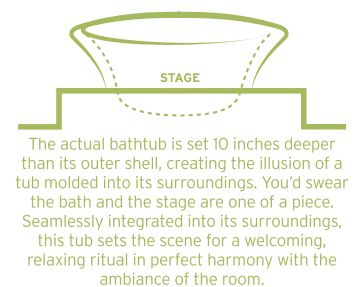

**IMPORTANT:** KEEP THE ORIGINAL. PLEASE MAKE COPIES.

# SANOS 7240 72 x 40 x 24

## ACCESSORIES - OPTIONAL

<b>Drain &amp; overflow (Exposed)</b>	D-13 (Balneo) - Chrome - Brushed nickel, Polished nickel, Brass, Unplated - Oil-rubbed bronze	\$ \$ \$
<b>Towel bars</b>	- Chrome, Unplated - Brushed nickel, Polished nickel, Oil-rubbed bronze, Brass	\$ \$ \$
<b>For air supply only</b>	Decorative pipe (1 1/2" x 6") Decorative pipe (1 1/2" x 24") Elbow (45°) Elbow (90°)	\$ \$ \$ \$


### Others

- There is a height difference for the rolled deck (see drawing Detail A).
- Faucets must be freestanding or wall mounted.
- The turbine must be remotely installed.
- Control must be wall-mounted

### TOTAL PRICE

\$

## Freestanding installation

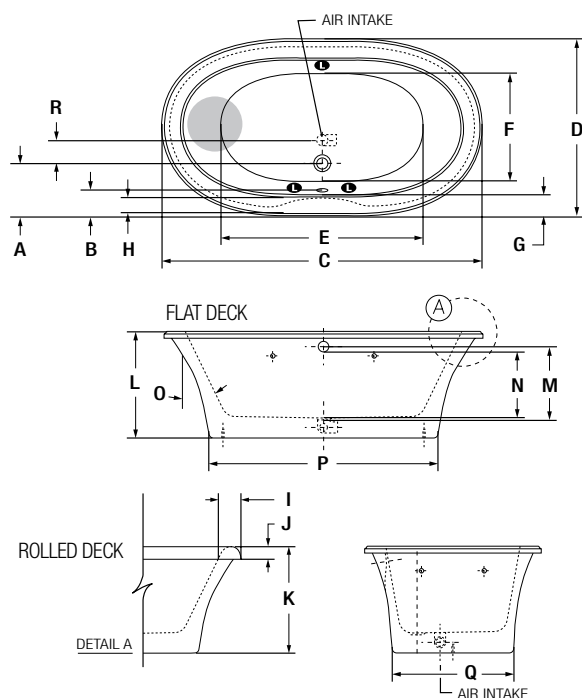


LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	11 3/4"
B	Outside edge to overflow	4 3/8"
C	Total length	72"
D	Total width	40"
E	Bathing well length	46 1/8"
F	Bathing well width	24 3/4"
G	Deck width	4 5/8"
H	Flat surface width	3 3/8"
I	Rolled deck width	5 3/8"
J	Height from bottom of lip to top deck	2 1/2"
K	Height from bottom of tub to top deck	25 1/2"
L	Height from bottom of tub to top deck	24 1/2"
M	Height from drain to center of overflow	16 5/8"
N	Maximum water level	14 7/8"
O	Slope of backrest	27°
P	Base length	55 7/8"
Q	Base width	27 7/8"
R	Distance from center air intake to center drain	5"

● Indicates heated backrest

● Indicates LED light position

## Theatre Stage™ installation

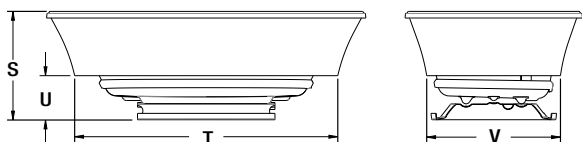

S	Height from bottom of tub to top deck	24 1/2"
T	Base length	59 3/8"
U	Stage height	10"
V	Base width	30 1/8"

## SANOS 7240 TECHNICAL SPECIFICATIONS

<b>Jets</b>	40	<b>Hot water supply required</b>	Should be 70% of water capacity of tub or greater.
<b>US gallons</b>	59	<b>Turbine access</b>	Must be at least 18" X 22" to access the turbine. Must be connected to a 15 A. 120 V, 60 Hz, protected by a ground-fault circuit interrupter (GFCI) on a dedicated line. Air vent necessary, 2" X 4" minimum.
<b>Imp. gallons</b>	49	Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations ( <a href="http://www.bainultra.com/documents">www.bainultra.com/documents</a> ).	
<b>Approx. shipping weight</b>	260 lbs		
<b>Turbine power</b>	755 W		
<b>Air heater</b>	700 W		

1 800 463.2187 | From 8 a.m. to 8 p.m. Monday to Thursday (EST) . From 8 a.m. to 5 p.m. on Friday (EST)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.