



PRODUCT SHEET
ELLIPSE 6636
 66 x 36 x 21



© BAINULTRA

FEATURES

Installation type	- Drop-in - Undermount
Deck	- Flat - Rolled
No. of bathers	1
Heated backrest	1
Control	MiaPlus
ThermoMasseur® bath	\$
Soaker bath	\$

THERAPIES

Chromatherapy 2-LED	\$
Sound Therapy (Euphonia® headset)	\$

COLORS

Standards



Optionals



WARRANTY

Controls*	5 years
Bath & turbine*	20 years
*Some restrictions apply www.bainultra.com/warranty	



IMPORTANT: KEEP THE ORIGINAL. PLEASE MAKE COPIES.




ELLIPSE 6636 66 x 36 x 21

ACCESSORIES - OPTIONAL

Drain & overflow	16" x 35"	
	- Chrome	\$
	- White, Biscuit, Bone	\$
	- Brass	\$
	- Brushed nickel, Polished nickel, Oil-rubbed bronze	\$

Control	MiaMulti	\$
Cutting template	# 90000055	
Other	- There is a height difference for the rolled deck (see drawing Detail A).	

TOTAL PRICE \$

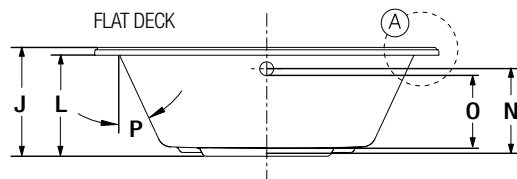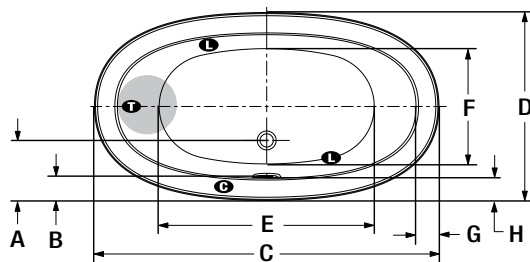

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	11 1/2"
B	Outside edge to overflow	4 5/8"
C	Total length	66"
D	Total width	36"
E	Bathing well length	42 3/8"
F	Bathing well width	22 1/4"
G	Deck width at backrest end	4 3/8"
H	Deck width at drain end	4 1/4"
I	Rolled deck width	4 3/4"
J	Height from bottom of tub to top deck	21"
K	Height from bottom of tub to top deck	22"
L	Height from bottom of tub to bottom of lip	19 1/2"
M	Height from bottom of lip to top deck	2 1/2"
N	Height from drain to center of overflow	16 5/8"
O	Maximum water level	14 7/8"
P	Slope of backrest	25°

T Indicates turbine position
L Indicates LED light position
C Indicates control position when factory-installed

ELLIPSE 6636 TECHNICAL SPECIFICATIONS

Jets	38	Hot water supply required Should be 70% of water capacity of tub or greater.
US gallons	48	
Imp. gallons	40	
Approx. shipping weight	100 lbs	Turbine access Must be at least 18" X 22" to access the turbine. Must be connected to a 15 A. 120 V, 60 Hz, protected by a ground-fault circuit interrupter (GFCI) on a dedicated line.
Turbine power	755 W	
Air heater	700 W	

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentations).

1 800 463.2187 | From 8 a.m. to 8 p.m. Monday to Thursday (EST) . From 8 a.m. to 5 p.m. on Friday (EST)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.