




PRODUCT SHEET

TEKURA 7242

72 x 42 x 22
Thoughtful design. Inspired care.

Drop-in / Alcove (3 walls) / Freestanding with **C-20** Contour



© BAINULTRA®

Wood



© BAINULTRA®

Acrystal™

FEATURES

Installation type	- Drop-in - Alcove (3 walls) - Freestanding
No. of bathers	2
Heated backrest	1
MyBodyRest™ complete set in Wood or Acrystal™	Includes Headrests, Armrests & Legrests
Control	MiaPlus
ThermoMasseur® bath	\$
Soaker bath	\$
With Morphosys™	\$

THERAPIES

Chromatherapy 3-LED	\$
Sound Therapy (Euphonia™ System)	\$

COLORS

Standards



Optionals



NEW SELECTION OF PANELS WITH MORPHOSYS™



Wood Stainless steel

WARRANTY

Controls*	5 years
Bath & turbine*	20 years

*Some restrictions apply | www.bainultra.com/warranty



IMPORTANT: KEEP THE ORIGINAL. PLEASE MAKE COPIES.

TEKURA™: TEKURA 6636: C-20 / C-21 / C-22 / C-23 / C-24, TEKURA 7242: C-20 / C-21 / C-22 / C-23 A & B / C-24

BainUltra®
The quest for your wellness™
www.bainultra.com

TEKURA 7242 72 x 42 x 22


ACCESSORIES - OPTIONAL

Skirts	Littora \$ SJ-1 \$	Elegance \$
Drain & overflow	D-11 (22" - 27") - Chrome - White, Biscuit, Bone - Brass - Brushed nickel, Polished nickel, Oil-rubbed bronze	\$ \$ \$ \$

Control	MiaMulti \$
Other	Optional tile flange. \$ (specify front or back)
Note	For freestanding installation The Morphosys™ spec sheet is available at bainultra.com

TOTAL PRICE \$

C-20 Contour

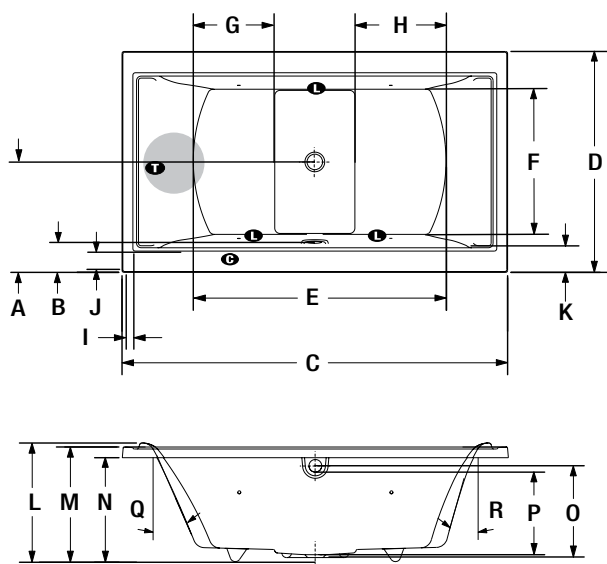

LETTER	DESCRIPTION	MEASURE
A	Outside edge to center drain	20 5/8"
B	Outside edge to overflow	5 5/8"
C	Total length	72"
D	Total width	41 1/4"
E	Bathing well length	47 1/4"
F	Bathing well width	27 1/4"
G	Sitting area	15 1/8"
H	Sitting area	17 1/8"
I	Flat surface width (widest point)	1 3/8"
J	Flat surface width (widest point)	3 3/8"
K	Deck width (widest point)	5"
L	Total height to headrest	22 1/4"
M	Height from bottom of tub to top deck	21 1/2"
N	Height from bottom of tub to bottom of lip	19 1/2"
O	Height from drain to center of overflow	17"
P	Maximum water level	15 3/8"
Q	Slope of backrest	24°
R	Slope of backrest	16°

T Indicates turbine position
● Indicates heated backrest
L Indicates LED light position
C Indicates control position when factory-installed

TEKURA 7242 TECHNICAL SPECIFICATIONS

Jets	45	Hot water supply required	Should be 70% of water capacity of tub or greater.
US gallons	73	Turbine access	Must be at least 18" X 22" to access the pump. Must be connected to a 15 A. 120 V, 60 Hz, protected by a ground-fault circuit interrupter (GFCI) on a dedicated line.
Imp. gallons	60	Standards	All BainUltra products meet and/or exceed the highest quality and certification standards. For further details about BainUltra's product standards, please go to the following link: (www.bainultra.com/standards).
Turbine power	755 W	Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation).	
Air heater	700 W		

1 800 463.2187 | From 8 a.m. to 8 p.m. Monday to Thursday (EST) . From 8 a.m. to 5 p.m. on Friday (EST)

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.