

Mustard 3000

Wiggle 3946

Specifications

Contents

59% post-consumer recycled polyester
41% polyester

Weight

16.0 ± 1.0 oz./lin. yd.

Width

54" min. useable

Repeat

.1875" vertical, .25" horizontal

Treatment

BLOCKAide™

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Performance



Breaking Strength (ASTM D5034)

275 lbf min. warp and 300 lbf min fill

Tear (ASTM D2261)

45 lbf min. warp and 55 lbf min fill

Seam Slippage (ASTM D4034)

40 lbf min. warp and 55 lbf min. fill

Pilling resistance (ASTM D3511)

Class 4 min.

Colorfastness to light (AATCC 16 Option 3)

Grade 4 min. at 40 hours

Colorfastness to crocking (AATCC 8)

Grade 4 min. dry & Grade 3 min. wet

Colorfastness to water (AATCC 107)

Class 3 min. for staining
Class 4 min. for color change

Wyzenbeek Abrasion resistance (ASTM D4157)

100,000 double rubs min. cotton duck


Flammability

CA Tech Bulletin 117 Sec. E
NFPA 260/UFAC Fabric Classification - Class I

Miscellaneous

This is a directional fabric.

Application testing of this product is recommended.

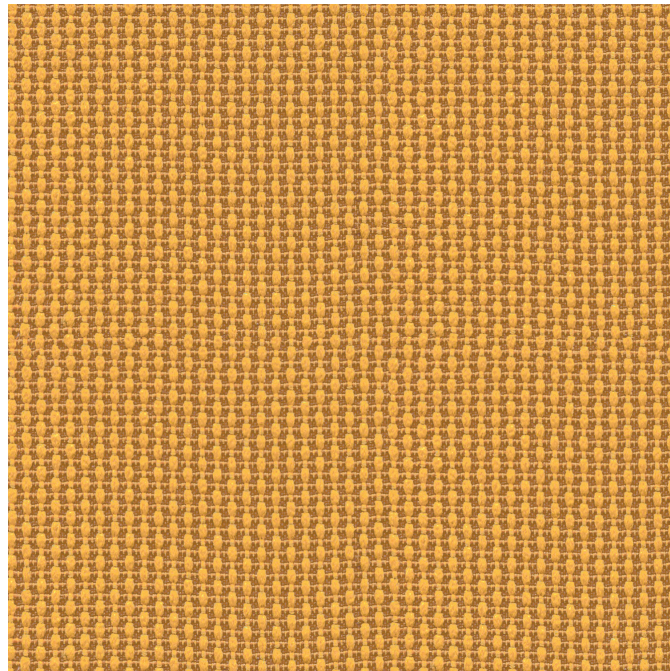

Guilford of Maine