

Important planning information for bathtubs and whirltubs

Place of installation

- Check the width of the doors to ensure that the bathtub will fit through and into the bathroom.
- There must be no floor heating below the bathtub.
- The floor must be absolutely flat and horizontal.
- Install **bathtubs with panelling** after tiling.
- Install **bathtubs without panelling** either before or after tiling.
- **Whirltubs:** depending on the combination of bathtub and whirl-system, system components might protrude beyond the rim of the bathtub. This is why we recommend installation in a bathtub casing.
- **Tolerances with acrylic:** as a result of the manufacturing process, deviations from the specified nominal dimensions are possible within the scope of the tolerances as per DIN 198. Please take this into account during planning.

Inspection openings and ventilation grates

Tiling the bath

- Provision must be made for the following inspection openings:
 - Outlet and overflow fitting 200 x 200 mm
 - Aggregates 500 x 500 mm
 - For the position, see chapter "Whirl systems product information".
- Whirl tub or bathtub with coloured light: for the air supply, allow an opening with an area of approx. 15 cm² (e.g. 3 x 5 cm or 2 x 7.5 cm) in the panel.

Bathtub with Duravit panelling

- It must be possible to remove the panelling for inspection purposes. For this reason, allow a certain amount of space in front of the panelling.
- For the air supply, an opening is pre-installed in the panelling; this must not be covered.

Water connection

The water may only be connected by a qualified plumber. Country-specific standards and local regulations must be observed in full.

Water connection

- Connect the inlet and outlet according to current standards and local regulations.
- Ensure that the connecting sleeve is flush with the floor.

Electrical installation for bathtubs with coloured light and whirltubs




The electricity may only be connected by a qualified electrician. Country-specific standards, local regulations and low-voltage guidelines must be observed in full.

Electrical connection

Electrical data

Whirlsystem	Max. rated power without heating	Max. rated power with heating	Frequency Voltage
Air	1,08 kW	-	50 Hz: 230 V~AC 60 Hz: 220 V~AC
Jet	0,74 kW	-	
Combi P	2,19 kW	-	
Combi E	2,74 kW	3,50 kW	
Combi L	2,38 kW	5,34 kW	
Jet E	1,69 kW	2,69 kW	
Jet L	1,36 kW	4,36 kW	

- Potential equalisation installed, 3000 mm
- Install supply line in acc. with the following requirements (two supply lines for combi system L with temperature module):
 - Fuse protection $I_N = 16 A$,
RCD max. 30mA
 - Switched via all-pole disconnecting mains switch, outside zones 0, 1 and 2 (see Fig. I)
 - Cable length 3000 mm



Whirl-Systems Product Information

Equipment _____	Air	Jet	Combi P	Combi E	Combi L
Support frame _____	●	●	●	●	●
Cable-driven waste and overflow _____	●	●	●	●	●
Cable-driven waste and overflow with integrated water inlet * _____	●	●	●	●	●
12 jets embedded in the floor (Air) ** _____	●	.	●	● ◆	● ◆
6 side mounted jets (Air and water) _____	.	● ◆	● ◆	● ◆	● ◆
2 adjustable rotating foot-massage jets _____	.	.	● ◆	● ◆	● ◆ ◆
3 adjustable rotating back-massage jets _____	.	.	.	● ◆	● ◆ ◆
Inline heater to compensate loss of temperature during whirl action _____	.	.	.	●	.
Heating module to heat the whirlpool to desired temperature _____	●
Pneumatic push-button integrated in the rim of the tub _____	●	●	●	.	.
Air control regulator integrated in the rim of the tub _____	.	●	●	●	.
Integrated control panel _____	.	.	.	●	.
Blue backlit LCD display integrated in the rim of the tub _____	●
1 underwater light, 50 W *** _____	.	.	.	●	●
Changing coloured light (instead of underwater light) _____	●
Full system drainage _____	●	●	●	●	●
Electronic cleaning system _____	.	.	.	●	.
UV Hygiene Management _____	●
Protection against overheating _____	.	.	.	●	●
Coloured light with remote control for whirltubsw _____	●	●	●	●	.

* except Blue Moon ** Blue Moon comes with 24 jets *** Blue Moon comes with 2 lights

This overview does not apply for D-Code Whirltubs

● = standard

● = optional

◆ = switch on and off separately

◆ = adjustable

. = not available

Whirl-Systems Product Information

Whirlsystems and additional modules



Air-System

Warm air is injected into the bath by 12 (24 in Blue Moon) jets embedded in the floor of the tub.



Jet-System

6 side mounted jets create maximum hydrotherapeutic action with actuated intensity of the massage, freely regulated via an air control regulator which is integrated in the rim of the tub.



Back-massage

Water-Air-jet
3 adjustable rotating jets have a beneficial effect on the back.



Foot-massage

Water-Air-jet
2 adjustable rotating jets are stimulating the reflex zones of the foot.



Light

1 (2 in Blue Moon) underwater light, 50 W halogen, creates a cosy atmosphere in the bathroom.



Temperature

Electronically controlled thermal system to compensate for loss of temperature during whirl action.



Hygiene Management

Electronically controlled cleaning system for the disinfection of the jets and pipes of the whirlsystem.



Coloured Light

Light from 5 (10 in Blue Moon) LED-spotlights set into the side walls suffuses the water in alternating, bright colours. A colour in accordance with the atmosphere. Halogen spot is going to be replaced.



Coloured Light with remote control for bathtubs and whirltubs

Light from 5 (10 in Blue Moon) LED-spotlights set into the side walls suffuses the bath water in alternating, bright colours. The 6 colours and white light plus 5 coloured lighting programmes can be selected using the remote control. The brightness of the colours can be dimmed. The LED coloured lighting is not available for Combi L.



Temperature L

Heating module with blue backlit LCD display and control. This system can be used to adjust the whirltub to the desired temperature.




UV Hygiene Management

Simple, environmentally-friendly hygiene by means of automatic UV disinfection. Permanent monitoring of operation by optical sensor.

Whirl-Systems Product Information

Air-System

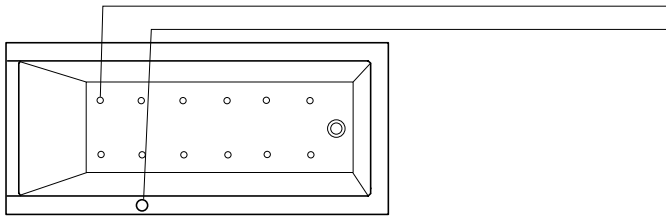


Equipment

12 jets embedded in the floor (air)
Pneumatic regulator

Accessories (optional)

Cable-driven waste and overflow with integrated water inlet (without image)
Coloured Light with remote control for whirltubs (without image)

Jet-System

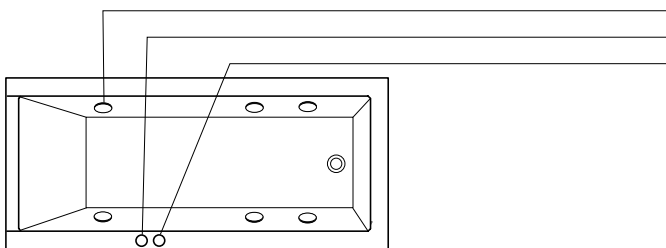


Equipment

6 side mounted jets (air + water)
Pneumatic regulator
Air control regulator

Accessories (optional)

Cable-driven waste and overflow with integrated water inlet (without image)
Coloured Light with remote control for whirltubs (without image)


Jet-System (D-Code)

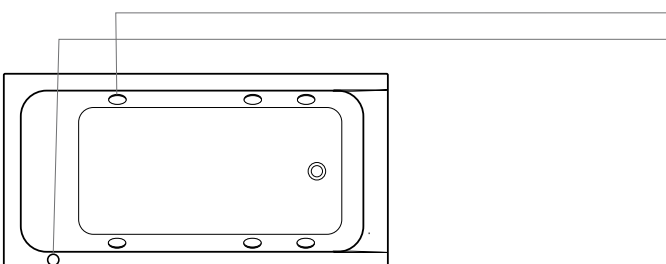

Equipment

6 side mounted jets (air + water)
Operating unit + Air control regulator

Combi-System P

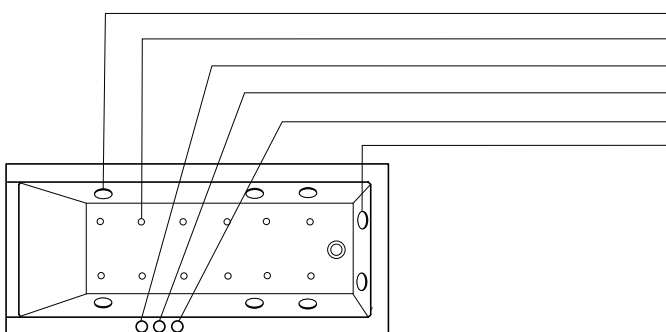

Equipment


6 side mounted jets (air + water)
12 jets embedded in the floor (air)
Pneumatic regulator Jet-System
Air control regulator Jet-System + foot-massage
Pneumatic regulator Air-System
2 adjustable rotating foot-massage jets

Accessories (optional)

Cable-driven waste and overflow with integrated water inlet (without image)
Coloured Light with remote control for whirltubs (without image)

Whirl-Systems Product Information

Combi-System E

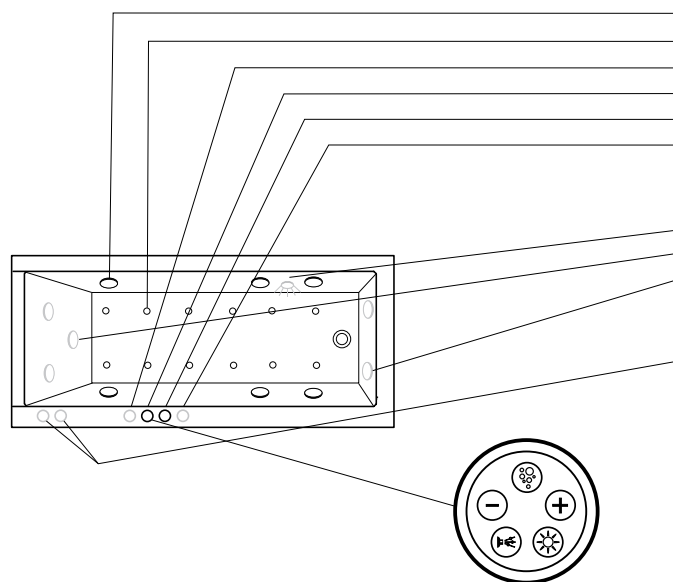

Equipment

- 6 side mounted jets (air + water)
- 12 jets embedded in the floor (air)
- Air control regulator back-massage (optional)
- Control Panel Combi-System E
- Air control regulator Jet-System
- Air control regulator foot-massage (optional)

Additional modules (optional)

- 1 underwater light, 50 W
- 3 adjustable rotating back-massage jets
- 2 adjustable rotating foot-massage jets
- Temperature (Inline heater to compensate loss of temperature during whirl action) (without image)
- Control Panel for electronic cleaning


Accessories (optional)

- Cable-driven waste and overflow with integrated water inlet (without image)
- Coloured Light with remote control for whirltubs (without image)

Control Panel Combi-System E

The system is operated by pressing the raised symbol on the Control Panel.

Combi-System L

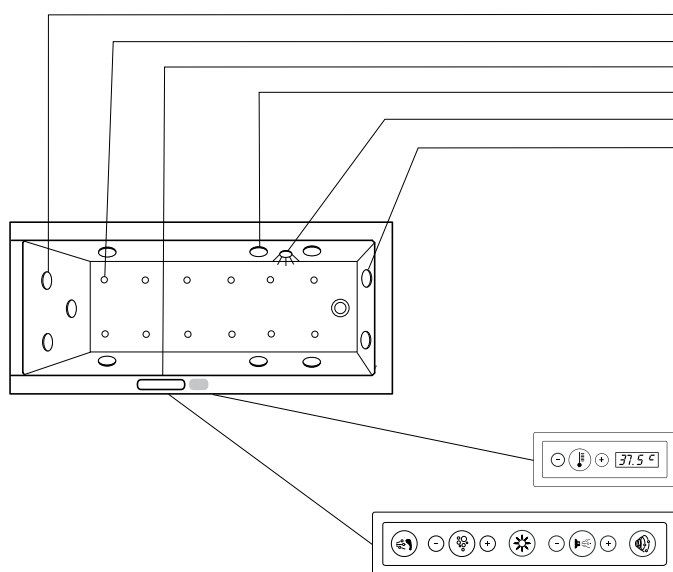

Equipment

- 3 adjustable rotating back-massage jets
- 12 jets embedded in the floor (air)
- Control Panel Combi-System L
- 6 side mounted jets (air + water)
- 1 underwater light, 50 W
- 2 adjustable rotating foot-massage jets

Additional modules (optional)

- Coloured Light (instead of underwater light) (without image)
- UV-Hygiene management (without image)
- Temperature L (to heat the whirltub to the desired temperature) (without image)

Accessories (optional)

- Cable-driven waste and overflow with integrated water inlet (without image)


Control Panel Temperature L (optional)

Control Panel Combi-System L

Blue backlit LCD display
The system is operated by pressing the raised symbols on the Control Panel. The operating symbols are almost invisible at first. By gently pressing the area within the stainless steel frame, the lighting comes on gradually. The functions are controlled via the now visible symbols. Once the whirl action is over, the lighting dims completely.

Whirl-Systems Product Information

Combi-System E (Blue Moon)

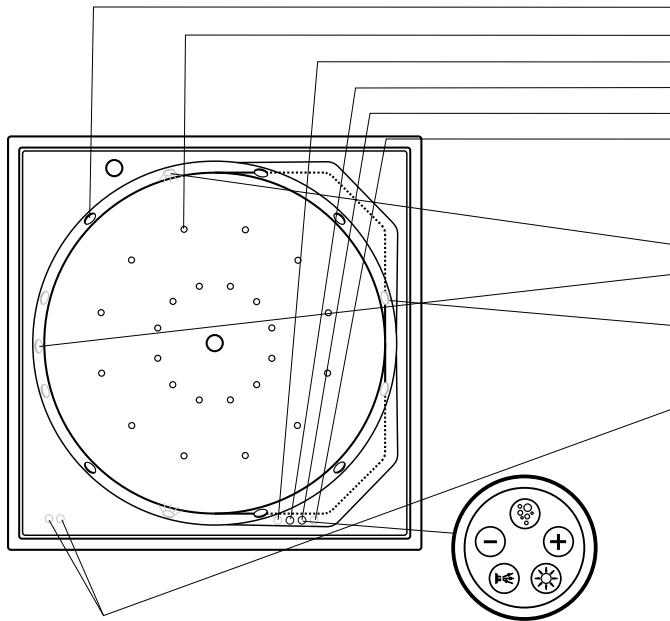

Equipment

6 side mounted jets (air + water)
24 jets embedded in the floor (air)
Air control regulator back-massage (optional)
Air control regulator Jet-System
Control Panel Combi-System E
Air control regulator foot-massage (optional)

Additional modules (optional)

2 underwater lights, 50 W
3 adjustable rotating back-massage jets (arranged in different heights)
2 adjustable rotating foot-massage jets
Temperature (Inline heater to compensate loss of temperature during whirl action) (without image)
Control Panel electronic cleaning system


Accessories (optional)

Coloured Light with remote control for whirltubs (without image)

Control Panel Combi-System E

The system is operated by pressing the raised symbol on the Control Panel.

Combi-System L (Blue Moon)

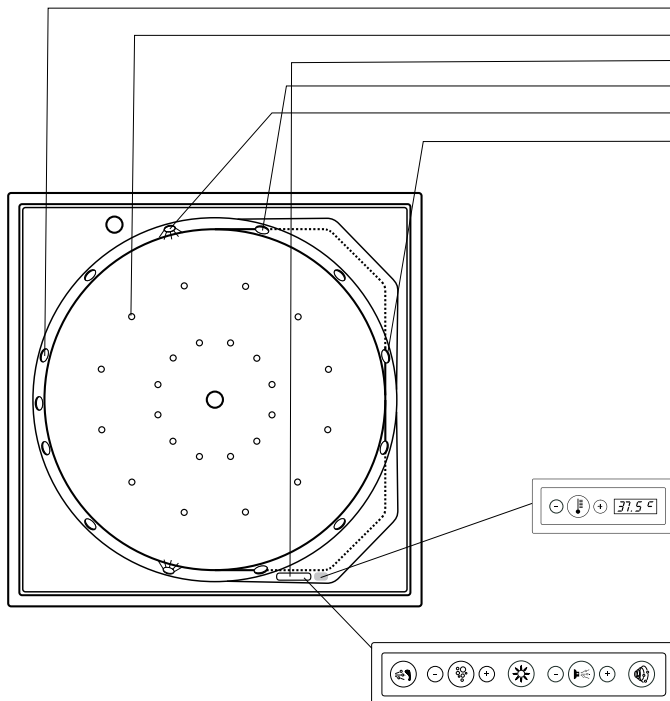

Equipment

3 adjustable rotating back-massage jets (arranged in different heights)
24 jets embedded in the floor (air)
Control Panel Combi-System L
6 side mounted jets (air + water)
2 underwater lights, 50 W
2 adjustable rotating foot-massage jets

Additional modules (optional)

Coloured Light (instead of underwater light) (without image)
UV Hygiene Management (without image)
Temperature L (to heat the whirltub to the desired temperature) (without image)


Control Panel Temperature L (optional)

Control Panel Combi-System L


Blue backlit LCD display
The operating symbols are almost invisible at first. By gently pressing the area within the stainless steel frame, the lighting comes on gradually. The functions are controlled via the now visible symbols. Once the whirl action is over, the lighting dims completely.

Whirl-Systems Product Information

2 x 3









1930 Series





Positioning of the Control Panel

The directions are taken from the perspective of a person bathing. In the standard configuration, the Control Panel is always on the right hand side, as are the drain and overflow fittings in 2-seater baths (c.f. Image.). On request, alternative positioning of the Control Panel or aggregates is however possible. Please send us a sketch showing the desired layout. Duravit will check and wherever possible confirm the feasibility.






2nd floor



Blue Moon




D-Code

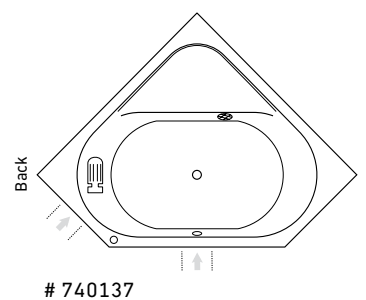


Whirl-Systems Product Information


Daro, Starck X




710027, # 710141, # 710050



710089




710028, # 710052




710090


Happy D.




710015




710016




710017




710018




71...19




710020




710172




710173




710174



710178




710179




710180

Paiova



710035, # 710037
710039, # 710041




710036, # 710038
710040, # 710042

Installation for Paiova with furniture panelling


Paiova Whirltub with furniture panelling:
Lower edge of siphon lies 45 mm below upper edge of tiles

Whirl-Systems Product Information


PuraVida

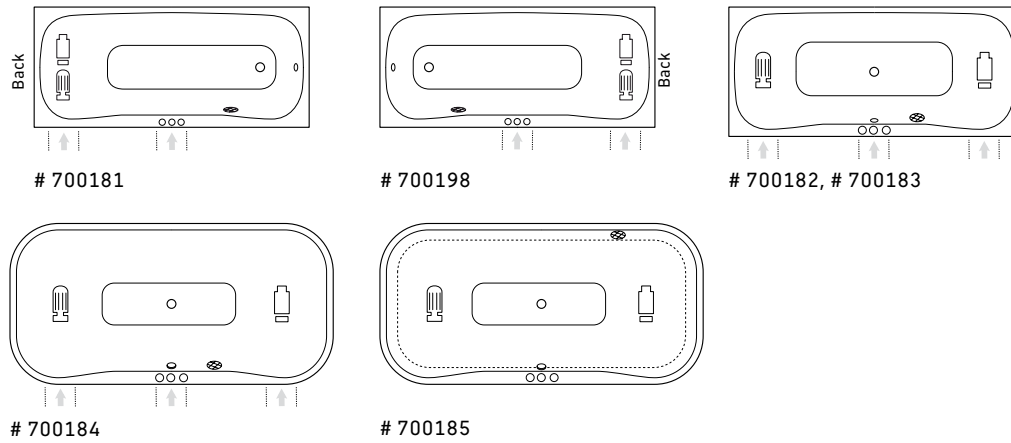


Seadream

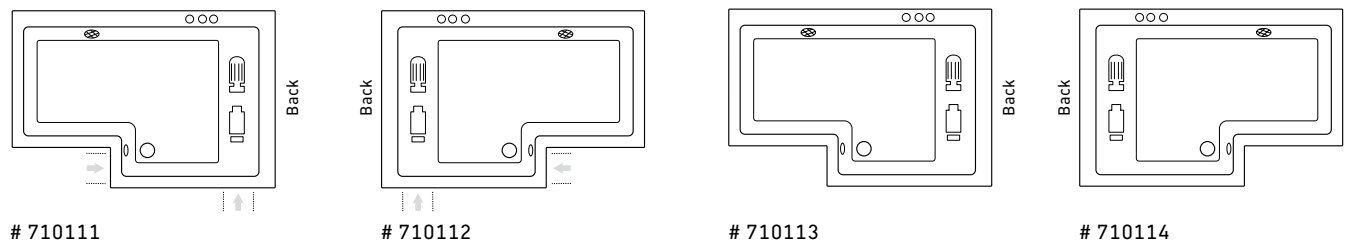

Starck

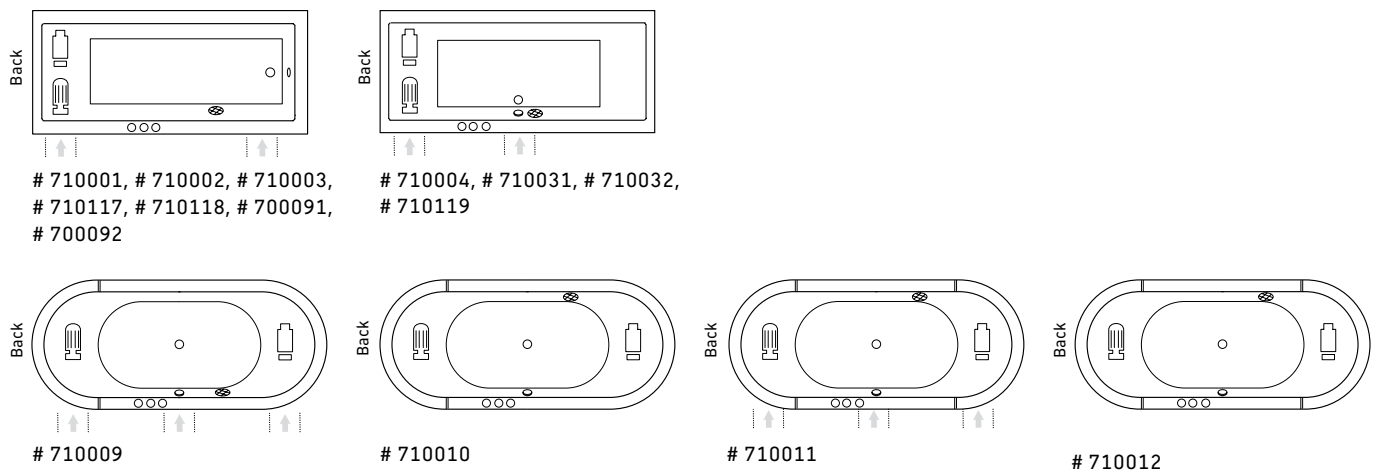


Vero

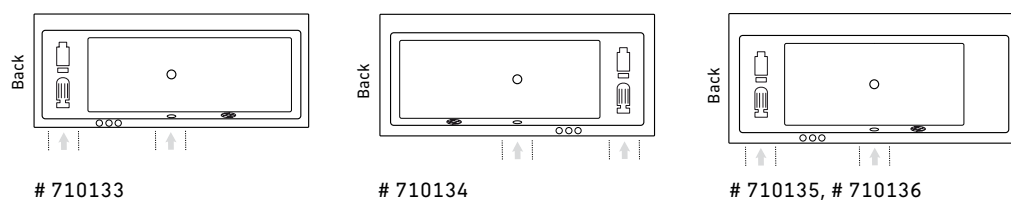


Whirl-Systems Product Information


Sundeck




710066, # 710128



710066, # 710128



710127



710127

Fig. 1 Freestanding version, corner right, and back-to-wall version

Fig. 2 Corner left

Positioning of the Control Panel on the pillar:

Furniture panelling for freestanding version, corner right and back-to-wall version:

Directions are as seen from the perspective of a person in the tub. In the standard configuration, the right hand always operates the Control Panel (see Fig. 1).

Custom version on request. In this case, a sketch showing the desired layout is required. Duravit will check and confirm whether the desired location is possible.

Furniture panel for corner left:

Directions are as seen from the perspective of a person in the tub. In the standard configuration, the left hand always operates the Control Panel (see Fig. 2).

Custom version on request. In this case, a sketch showing the desired layout is required. Duravit will check and confirm whether the desired location is possible.

Number of control panels on the pillar:

The number of control panels is determined by the system and the additional modules selected.

Drill holes for taps in the console:

On request, drill holes can be made at the factory for base plates for rim-mounted tap fittings. Please state the desired base plate when ordering. Duravit can supply a list of suitable pre-punched sets on request.

Legend



Whirl-Pump



Blower



Control Panel



Suction Screen




recommended equipment covers


Please note that in case of combining tubs and whirlsystems, single components may reach over the rim of the tub. Therefore, we suggest installation into a bathtub case.

Pre-installation PuraVida # 700181/710181


↳ 1700 x 750 x 460 ‹

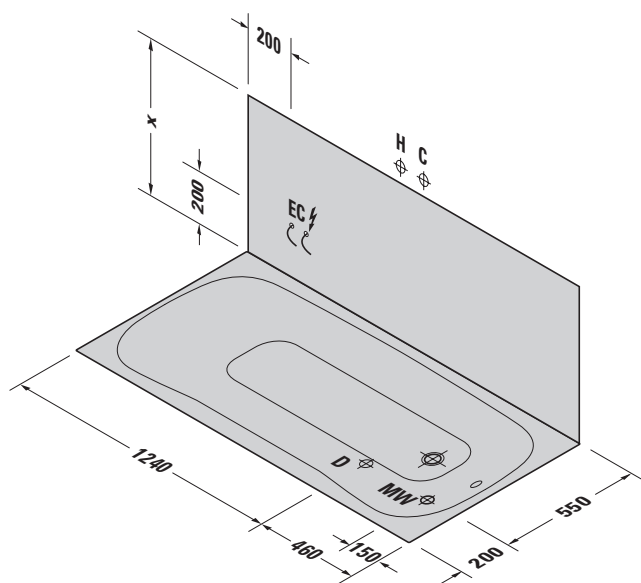

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for outlet and overflow fittings with inlet function
- EC** Electricity connection

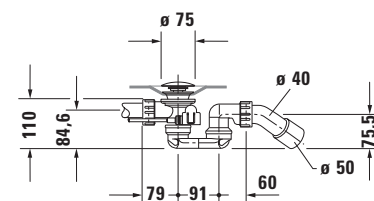

Siphon for bathtub # 700181



Siphon for whirltub # 710181


	Height	including feet	including support	including furniture panel	including acrylic panel
X Bathtub	480	600 - 670	600	607	-
X Whirltub	480	600 - 635	-	607	-

Technical specifications


Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
25,0	198	40,0	120 x 80 x 205	3/4", 1/2"		700181 .. 0 00 0000
34,0	205	76,0	202 x 105 x 86	3/4"	Air-System	710181 .. 1 00 1000
34,0	205	76,0	202 x 105 x 86	3/4"	Jet-System	710181 .. 2 00 1000
54,0	220	96,0	202 x 105 x 86	3/4"	Combi-System P	710181 .. 3 00 1000
54,0 - 63,0	220 - 227	96,0 - 105,0	202 x 105 x 86	3/4"	Combi-System E	710181 .. 4 .. 1000
61,0 - 66,0	226 - 230	103,0 - 108,0	202 x 105 x 86	3/4"	Combi-System L	710181 .. 5 .. 1000

Pre-installation PuraVida # 700198/710198


↳ 1700 x 750 x 460 ›

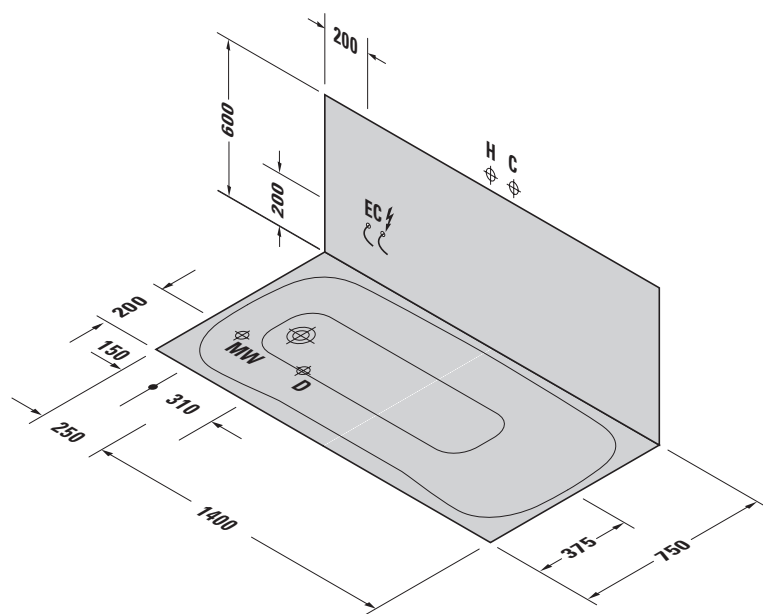

- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for outlet and overflow fittings with inlet function
- EC** Electricity connection

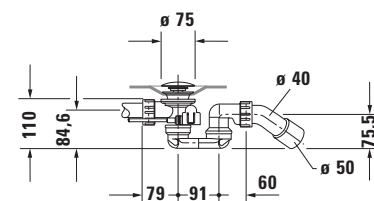

Siphon for bathtub # 700198



Siphon for whirltub # 710198


	Height	including feet	including support	including furniture panel	including acrylic panel
X Bathtub	480	600 - 670	600	607	-
X Whirltub	480	600 - 635	-	607	-

Technical specifications


Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
25,0	198	40,0	120 x 80 x 185	3/4", 1/2"		700198 .. 0 00 0000
34,0	205	76,0	202 x 105 x 86	3/4"	Air-System	710198 .. 1 00 1000
34,0	205	76,0	202 x 105 x 86	3/4"	Jet-System	710198 .. 2 00 1000
54,0	220	96,0	202 x 105 x 86	3/4"	Combi-System P	710198 .. 3 00 1000
54,0 - 63,0	220 - 227	96,0 - 105,0	202 x 105 x 86	3/4"	Combi-System E	710198 .. 4 .. 1000
61,0 - 66,0	226 - 230	103,0 - 108,0	202 x 105 x 86	3/4"	Combi-System L	710198 .. 5 .. 1000

Pre-installation PuraVida # 700182/710182


1800 x 800 x 460

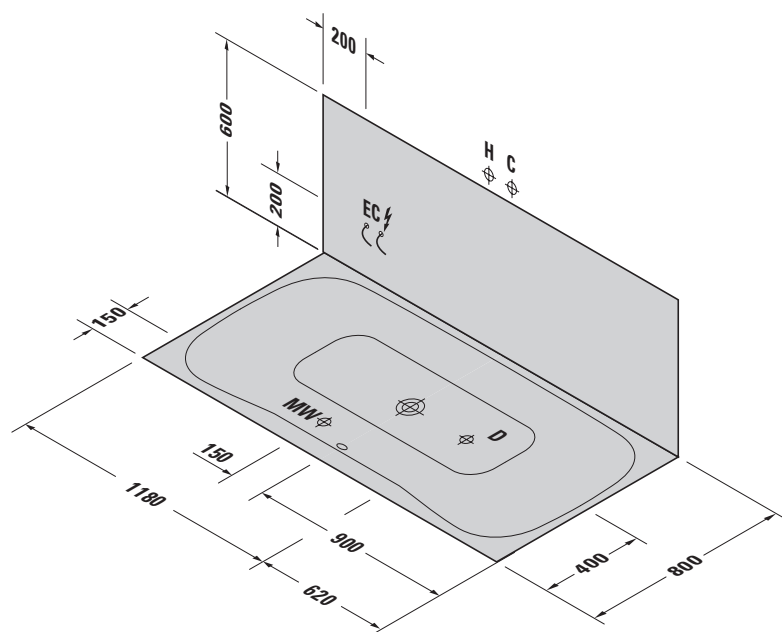


- H Hot water connection
- C Cold water connection
- D Drain connection
- MW Mixed water connection for outlet and overflow fittings with inlet function
- EC Electricity connection

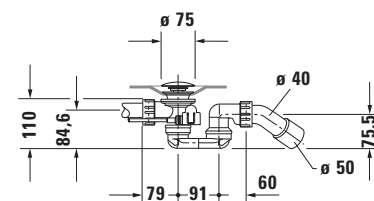


Siphon for bathtub # 700182



Siphon with base inlet
for bathtub # 700182



Siphon for Whirltub # 710182



Siphon with base inlet
for Whirltub # 710182


	Height	including feet	including support	including furniture panel	including acrylic panel
X Bathtub	480	600 - 670	600	607	-
X Whirltub	480	600 - 635	-	607	-

Technical specifications


Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
27,0	197	42,0	120 x 80 x 185	3/4", 1/2"		700182 .. 0 00 0000
36,0	203	78,0	202 x 105 x 86	3/4"	Air-System	710182 .. 1 00 1000
36,0	203	78,0	202 x 105 x 86	3/4"	Jet-System	710182 .. 2 00 1000
56,0	217	98,0	202 x 105 x 86	3/4"	Combi-System P	710182 .. 3 00 1000
56,0 - 65,0	217 - 223	98,0 - 107,0	202 x 105 x 86	3/4"	Combi-System E	710182 .. 4 .. 1000
63,0 - 68,0	222 - 225	105,0 - 110,0	202 x 105 x 86	3/4"	Combi-System L	710182 .. 5 .. 1000

Pre-installation PuraVida # 700183/710183


1900 x 900 x 460

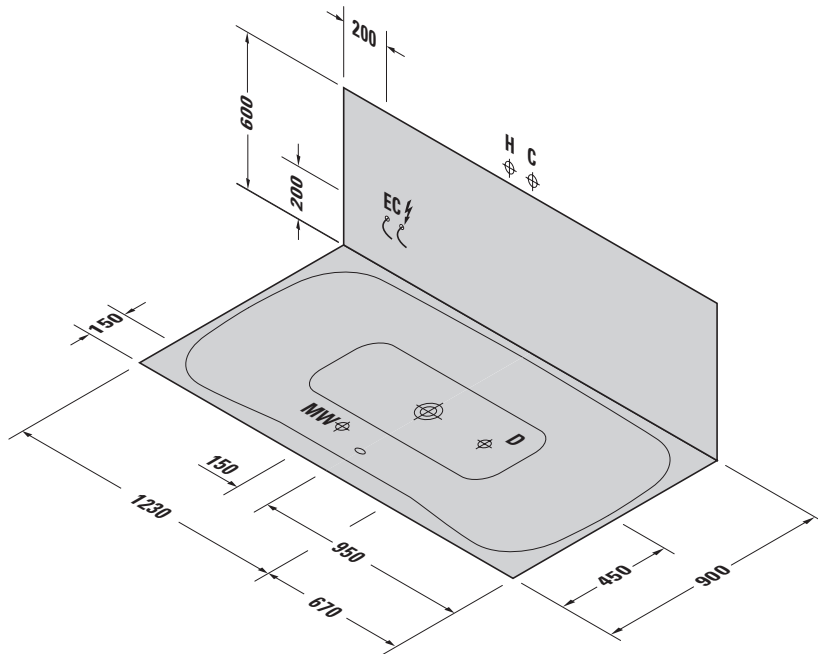


- H** Hot water connection
- C** Cold water connection
- D** Drain connection
- MW** Mixed water connection for outlet and overflow fittings with inlet function
- EC** Electricity connection

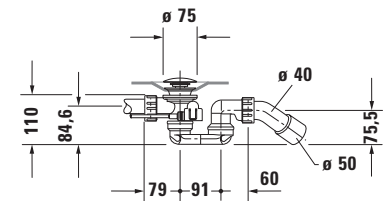


Siphon for bathtub # 700183



Siphon with base inlet
for bathtub # 700183



Siphon for Whirltub # 710183



Siphon with base inlet
for Whirltub # 710183


	Height	including feet	including support	including furniture panel	including acrylic panel
X Bathtub	480	600 - 670	600	607	-
X Whirltub	480	600 - 635	-	607	-

Technical specifications


Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
30,0	191	45,0	120 x 80 x 185	3/4", 1/2"		700183 .. 0 00 0000
39,0	196	81,0	202 x 105 x 86	3/4"	Air-System	710183 .. 1 00 1000
39,0	196	81,0	202 x 105 x 86	3/4"	Jet-System	710183 .. 2 00 1000
59,0	208	101,0	202 x 105 x 86	3/4"	Combi-System P	710183 .. 3 00 1000
59,0 - 68,0	208 - 213	101,0 - 110,0	202 x 105 x 86	3/4"	Combi-System E	710183 .. 4 .. 1000
66,0 - 71,0	212 - 215	108,0 - 113,0	202 x 105 x 86	3/4"	Combi-System L	710183 .. 5 .. 1000

Pre-installation PuraVida # 700184/710184


↳ 2000 x 1000 x 420 ›

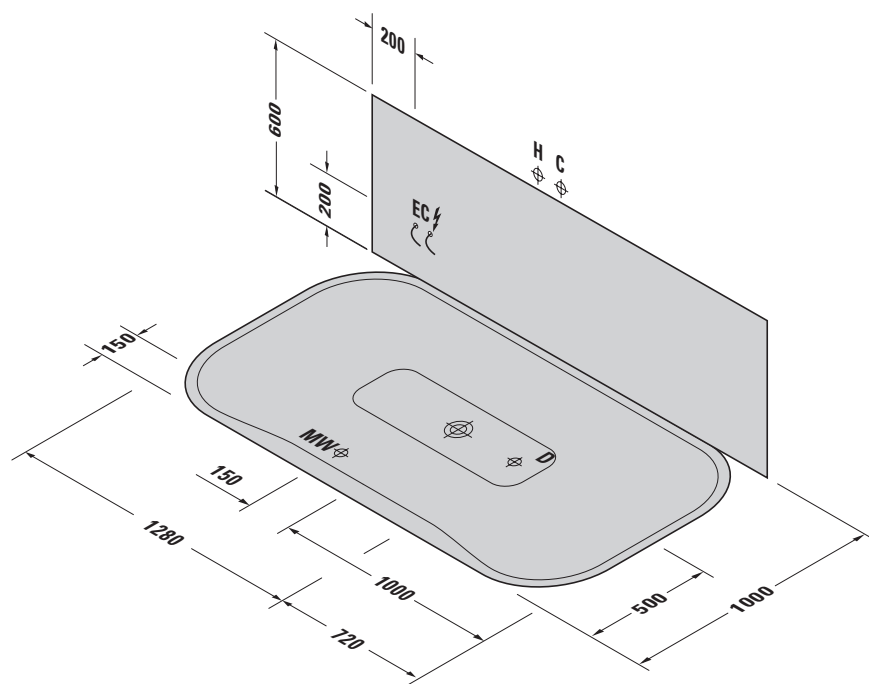


- H Hot water connection
- C Cold water connection
- D Drain connection
- MW Mixed water connection for outlet and overflow fittings with inlet function
- EC Electricity connection

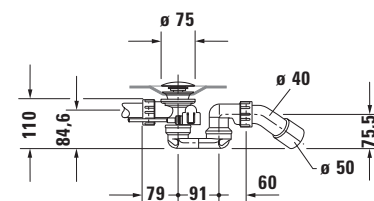


Siphon for bathtub # 700184



Siphon with base inlet
for bathtub # 700184



Siphon for Whirltub # 710184



Siphon with base inlet
for Whirltub # 710184


	Height	including feet	including support	including furniture panel	including acrylic panel
X Bathtub	445	565 - 635	600	-	-
X Whirltub	445	665 - 600	-	-	-

Technical specifications


Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
36,0	171	51,0	120 x 80 x 195	3/4", 1/2"		700184 .. 0 00 0000
45,0	175	87,0	202 x 105 x 86	3/4"	Air-System	710184 .. 1 00 1000
45,0	175	87,0	202 x 105 x 86	3/4"	Jet-System	710184 .. 2 00 1000
65,0	185	107,0	202 x 105 x 86	3/4"	Combi-System P	710184 .. 3 00 1000
65,0 - 74,0	185 - 190	107,0 - 116,0	202 x 105 x 86	3/4"	Combi-System E	710184 .. 4 .. 1000
72,0 - 77,0	189 - 191	114,0 - 119,0	202 x 105 x 86	3/4"	Combi-System L	710184 .. 5 .. 1000

Pre-installation PuraVida # 700185/710185


↳ 2000 x 1000 x 420 ›

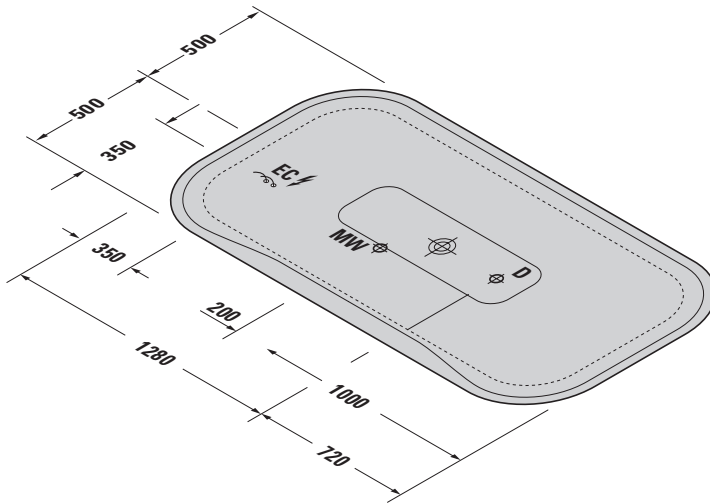


- H Hot water connection
- C Cold water connection
- D Drain connection
- MW Mixed water connection for outlet and overflow fittings with inlet function
- EC Electricity connection

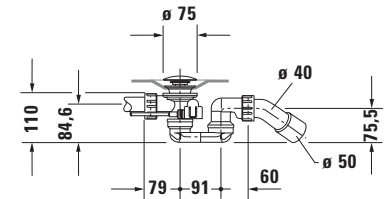


Siphon for bathtub # 700185



Siphon with base inlet
for bathtub # 700185



Siphon for Whirltub # 710185



Siphon with base inlet
for Whirltub # 710185

	Height	including feet	including support	including furniture panel	including acrylic panel
X Bathtub	445	565 - 635	-	-	570
X Whirltub	445	565 - 600	-	-	570

Technical specifications

Net weight kg	Floor load kg/m ²	Shipping weight kg	Shipping dimensions l x w x h (cm)	Water inlet OD, ID	Whirlsystem	Model-No.
72,0	189	87,0	120 x 80 x 205	3/4", 1/2"		700185 .. 0 00 0000
81,0	193	123,0	202 x 105 x 86	3/4"	Air-System	710185 .. 1 00 1000
81,0	193	123,0	202 x 105 x 86	3/4"	Jet-System	710185 .. 2 00 1000
101,0	203	143,0	202 x 105 x 86	3/4"	Combi-System P	710185 .. 3 00 1000
101,0 - 110,0	203 - 208	143,0 - 152,0	202 x 105 x 86	3/4"	Combi-System E	710185 .. 4 .. 1000
108,0 - 113,0	207 - 209	150,0 - 155,0	202 x 105 x 86	3/4"	Combi-System L	710185 .. 5 .. 1000