


MARAZZI  **USA**

the fine art of porcelain stoneware

(stone collection)

color body porcelain stoneware | rectified

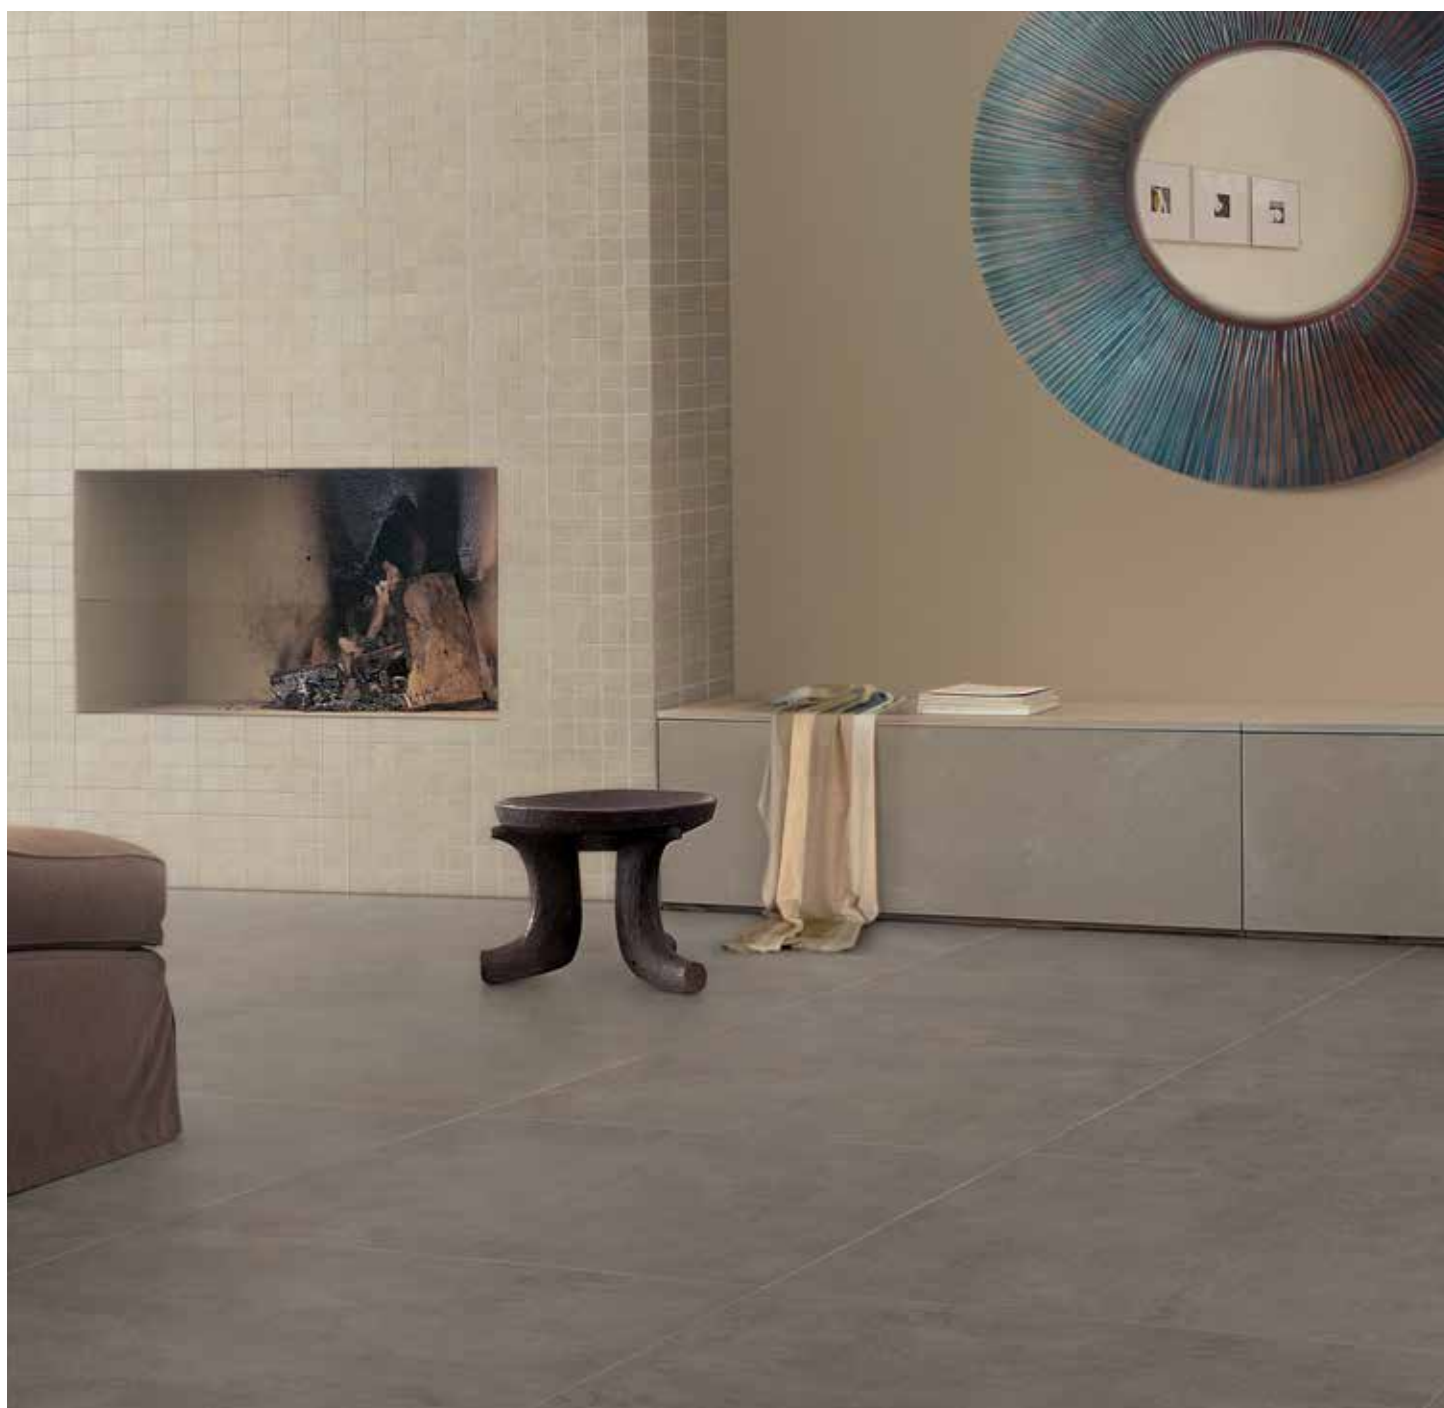

Stone Anthracite



Stone Green



Stone Ivory



Stone Anthracite Mosaic - Square 2"x2"



Stone Green Mosaic - Square 2"x2"



Stone Ivory Mosaic - Square 2"x2"



Stone Anthracite Mosaic - Brick 1.5"x2.5"




Stone Green Mosaic - Brick 1.5"x2.5"




Stone Ivory Mosaic - Brick 1.5"x2.5"



Stone Anthracite - Border



Stone Green - Border



Floor
Tile



Wall
Tile



Modular
Tile



Rectified
Tile



Decorative
Tile



Trim
Available



Suitable for
Outdoors



Slight
Variation



Frost
Resistant



Abrasion
Resistance



D.C.O.F. (Wet Areas)
(Minimum 0.42)



S.C.O.F. (Wet)
(Valid through 12-31-2013)



S.C.O.F. (Dry)
(Valid through 12-31-2013)



45% Minimum
Pre-Consumer
Recycled Content
















Contributes to
LEED Credits



UL GREEN BUILDING
MEMBER



Contributes to
LEED Credits

	MODULAR TILE					FLOOR TILE	DECOS			TRIMS*			
Thickness	 12"x12"R (30x30 cm) Rectified 7/16" (11mm)	 12"x24"R (30x60 cm) Rectified 7/16" (11mm)	 24"x24"R (60x60 cm) Rectified 7/16" (11mm)	 12"x48"R (30x120 cm) Rectified 7/16" (11mm)	 24"x48"R (60x120 cm) Rectified 7/16" (11mm)	 24"x24"R (60x60 cm) Rectified 7/16" (11mm)	 2"x12" (5x30 cm) Border	 12"x12" (30x30 cm) Mosaic - Square 2"x2"	 12"x12" (30x30 cm) Mosaic - Brick 1.5"x2.5"	 6"x12" (15x30 cm) Sanitary Cove Base**	 1"x6" (2.5x15 cm) Sanitary Cove Base In Angle**	 1"x6" (2.5x15 cm) Sanitary Cove Base Out Angle**	 3"x12" (8x30 cm) Bullnose
Names (colors)	MHSP	MHSF	MHJM	M6ZH	M6ZD	MHHQ		M54W	M54R	UHCD	UHCG	UHCK	UG4H
Stone Anthracite (gray)	MHSQ	MHSF	MHJN	M6ZJ	M6ZE	MHHR		M54X	M54T	UHCE	UHCH	UHCL	UG4J
Stone Green (green)	MHSM	MHSD	MHHT	M6ZF	M6ZA	MHHN		M54U	M54P	UHCF	UHCJ	UHCM	UG4K
Stone Anthracite (Complements Stone Anthracite)							MHT2						
Stone Green (Complements Stone Green)							MHT3						

Notes: *Trim is available in all colors and made to complement Modular and Floor Tile. ** Suggested for interior applications only.

ASTM Test Results

Technical Characteristics	ASTM Standards	ASTM Test Results	ASTM Test Methods
Water Absorption	≤ 0.50%	≤ 0.50%	C373
Frost Resistance	As Reported	Resistant	C1026
Scratch Resistance	MOHS 1-10	6	MOHS Scale
Breaking Strength	≥ 250 lbf.	≥ 850 lbf.	C648
Facial Dimension	-3.0% < Nominal ≤ 2.0%	Within Standard	C499
Thickness	≤ 0.04 in (1.02 mm max)	Within Standard	C499
Wedging (squareness)	+/- 0.25% or +/- 0.8 mm**	Within Standard	C502
Warpage (flatness)	+/- 0.40% or +/- 1.3 mm**	Within Standard	C485
Abrasion Resistance	Class 0 - Class V	Class IV	C1027
DCOF-Dynamic Coefficient of Friction (Wet Areas Only)*	As Reported	Minimum 0.42	DCOF AcuTest SM
SCOF-Static Coefficient of Friction (Dry)	As Reported	0.60 ≤ C.O.F. < 0.70	C1028
SCOF-Static Coefficient of Friction (Wet)	As Reported	0.60 ≤ C.O.F. < 0.70	C1028
Chemical Resistance	Class A - Class E	Class A	C650
Stain Resistance	Class A - Class E	Class A	C1378

*Dynamic Coefficient of Friction (DCOF) - Water, oil, grease or other fluids create slippery conditions. When installing floors in areas with exposure to these conditions, a minimum D.C.O.F. value of 0.42 is required. Additionally, extra caution is required with regards to product selection and proper maintenance. Visit www.tcnatle.com for complete information regarding the DCOF Acutest test method and values.

**DCOF AcuTest is the industry designation for the test procedure contained in ANSI A137.1 Section 9.6, which has been extensively researched, allows for in-situ field measurements, and is in use at tile manufacturing facilities. It was so named to distinguish it from other DCOF measurements using different instruments and/or protocols.

** Whichever is less

