

**MARAZZI**  **USA**

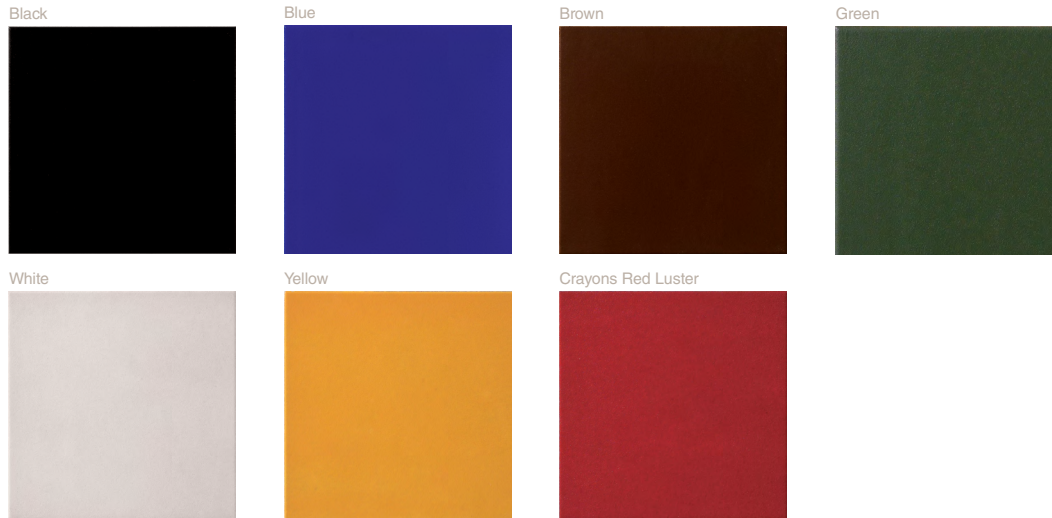
the fine art of ceramic tile





**(i colori)**

glazed ceramic tile

Made In The USA





	FLOOR TILE	TRIMS*			
					
Thickness	12"x12" (30x30 cm) 5/16" (8.5mm)	6"x8" (15x20 cm) Sanitary Cove Base	1"x6" (2.5x15 cm) Sanitary Cove Base In Angle	1"x6" (2.5x15 cm) Sanitary Cove Base Out Angle	
Names (colors)					
Black	UD37	UD3D	UD3L	UD3T	
Blue	UD38	UD3E	UD3M	UD3U	
Brown	UD39	UD3F	UD3N	UD3V	
Green	UD3A	UD3G	UD3P	UD3W	
White	UD3B	UD3H	UD3Q	UD3X	
Yellow	UD3C	UD3J	UD3R	UD3Y	
Crayons Red Luster	UQ00	UD3K	UD3S	UD3Z	

Notes: \* Trim is imported, available in all colors, suggested for interior applications only and made to complement Floor Tile.  
 \* Suggested for interior applications only.

## ASTM Test Results

Technical Characteristics	ANSI Standards	ASTM Test Results	ASTM Test Methods
Water Absorption	3.0% - 7.0%	2.0% - 5.0%	C373
Frost Resistance	As Reported	Resistant	C1026
Scratch Resistance	MOHS 1-10	7	MOHS Scale
Breaking Strength	≥ 250 lbf.	≥ 350 lbf.	C648
Facial Dimension	-3.0% < Nominal ≤ 3.0%	Within Standard	C499
Nominal Thickness	≤ 0.04 in (1.02 mm max)	Within Standard	C499
Wedging (squareness)	+/- 0.50% or +/- 2.0 mm**	Within Standard	C502
Warpage (flatness)	+/- 0.75% or +/- 2.0 mm**	Within Standard	C485
Abrasion Resistance	Class 0 - Class V	Class IV	C1027
DCOF-Dynamic Coefficient of Friction (Wet Areas Only)†	As Reported	Minimum 0.42	DCOF AcuTestSM*
SCOF-Static Coefficient of Friction (Dry)	As Reported	0.70 ≤ S.C.O.F. < 0.80	C1028
SCOF-Static Coefficient of Friction (Wet)	As Reported	0.60 ≤ S.C.O.F. < 0.70	C1028
Chemical Resistance	Class A - Class E	Class B	C650
Stain Resistance	Class A - Class E	Class A	C1378

† Dynamic Coefficient of Friction (DCOF) - Water, oil, grease or other fluids create slippery conditions. When installing floors in areas with exposure to these conditions, a minimum DCOF value of 0.42 is required. Additionally, extra caution is required with regards to product selection and proper maintenance. Visit [www.tcnatile.com](http://www.tcnatile.com) for complete information regarding the DCOF AcuTest test method and values.

\* DCOF AcuTest is the industry designation for the test procedure contained in ANSI A137.1 Section 9.6, which has been extensively researched, allows for in-situ field measurements, and is in use at tile manufacturing facilities. It was so named to distinguish it from other DCOF measurements using different instruments and/or protocols.

\*\* Whichever is less