

35PBFD POWERBAR® WIRE CHASE


Assembly Instructions

Parts List

Qty.	Part No.	Description
1	022-1990	Housing, Wire Chase
1	010-3190	Cover
2	010-3191	Joining Plates

Hardware List

Qty.	Ref	Part No.	Description
4	AA	02115	#6-32 x 1/4" Type "AB" Phillips Head Screw
8	BB	030-0302	#8-32 x 1/2" Phillips Pan Head Screw
8	CC	02236	#8-32 Hex Nut-Serrated

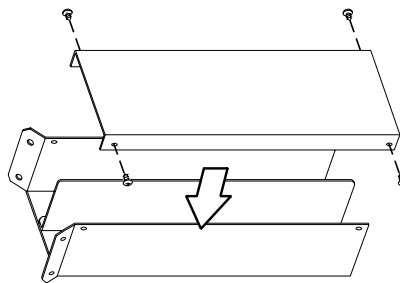


Step 1

Place cover onto wire feed housing as shown and install #6-32 self tapping screws (AA).

Option #1 (Single)


(Bin cover removed for installation)

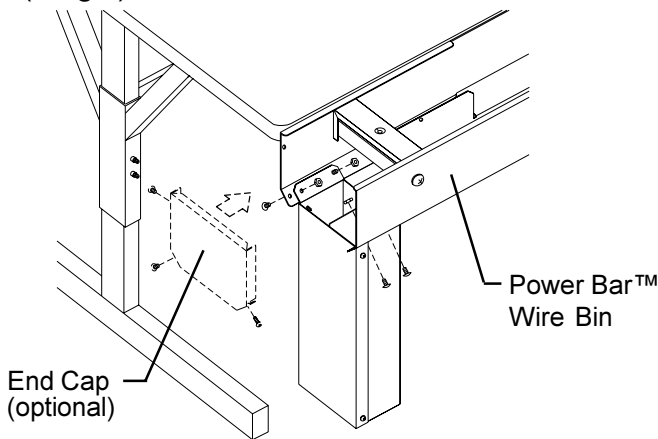

Slide wire chase into either end of the Power Bar™ wire bin (**NOTE:** remove joining panel supplied with wire bin, if installed). Install #8-32 screws (BB) and nuts (CC) as shown. Optional End Caps can be installed to close off both ends of the wire bin.

Option #2 (Multiple)

(Bin cover removed for installation. Tube support and support bracket removed pictorially for clarity)

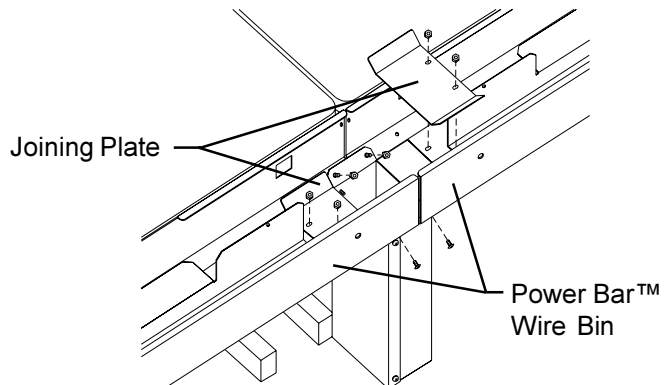

Note: Prior to joining the two tables together, insert Power Bar™ wire chase into one open end of wire bin. Center the wire chase in the opening of the two joined wire bins. Install #8-32 screws (BB) and nuts (CC) as shown. **Do not tighten.** Install the joining plates using #8-32 screws (BB) and nuts (CC). Align the wire chase and plates and tighten all hardware.

Bretford
11000 Seymour Avenue
Franklin Park, IL 60131
TEL: 847.678.2545
800.521.9614
FAX: 847.678.0852
800.343.1779

Bretford Ltd.
Technology House
7 Lake End Court, Taplow
Bucks SL6 0JQ England
TEL: 01628 603558
FAX: 01628 604923