

COBBLESTONE
STACKED BOND PATTERN
ORDER NUMBER 3030



Imprinted concrete pattern has been created using:

LITHOCHROME® Color Hardener
A-25 La Crescenta Brown

LITHOCHROME® Color Hardener
A-21 Deep Charcoal

LITHOTEX® Liquid Release

SCOFIELD® Cureseal-W™ Semi Gloss

Texture Description:

Surface texture is that of naturally worn, flat cobblestones. Edges are irregular and corners rounded.

Pattern Description:

Pattern is formed of rectangular cobblestones laid end-to-end in parallel rows. Cobblestones are 5-3/8" (137 mm) wide and 11-3/8" (289 mm) long. Inside joints have the appearance of a flat, smooth, grouted joint, varying from 1/4" (6 mm) to 7/8" (22 mm) wide and a maximum of 3/8" (10 mm) deep. Tool edges have a surrounding outside joint, varying from 1/8" (3 mm) to 7/16" (11 mm) wide, which matches the inside joints when tools are joined.

Also available:

Full Cobblestone Filler Tool 3150

Textured Skin Tool 1040




PROFESSIONAL GRADE TOOLS - P3030

STANDARD GRADE TOOLS - S3030

FLEXIBLE TOOLS - F3030

Patterns that exceed 32" in any dimension are not recommended for use in Standard Grade.

Travel distance approximately 36"

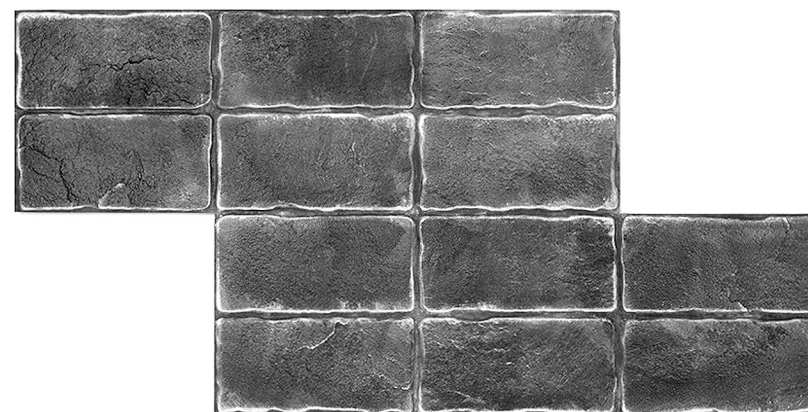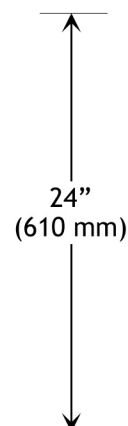

classic **COBBLESTONES**

PATTERN SHEET D-3030.01

This pattern sheet is meant as a reference only. Read the Scofield Tech-Data bulletin T-404 LITHOTEX Pavecrafters for additional information, layout suggestions, and installation instructions. Creating layouts for imprinted concrete requires skill and practice. Follow professional standards and practices, including those published by the American Concrete Institute (ACI).