

**NEW BRICK
STACKED BOND PATTERN
ORDER NUMBER 2000**



Imprinted concrete pattern has been created using:

LITHOCHROME® Color Hardener
A-51 Steadman Buff

LITHOCHROME® Antiquing Release
3854 Pecan Tan

SCOFIELD® Cureseal-W™ Semi Gloss

Texture Description:

Surface texture is that of new, unused brick.

Edges are straight. Corners are square.

Pattern Description:

Pattern is formed by common brick masonry units laid end-to-end in parallel rows. Bricks are 3-5/8" (92 mm) wide by 7-5/8" (194 mm) long. Inside joints have the appearance of a raked, rough, sandy grouted joint, 3/8" (10 mm) wide and 1/8" (3 mm) deep. Tool edges have an outside joint, 3/8" (10 mm) wide on selected sides, which matches the inside joints when tools are joined.

Also available:

New Brick Filler Tool 2190

Textured Skin Tool 1010




PROFESSIONAL GRADE TOOLS - P2000

STANDARD GRADE TOOLS - S2000

FLEXIBLE TOOLS - F2000

Patterns that exceed 32" in any dimension are not recommended for use in Standard Grade.

Travel distance - approximately 32"

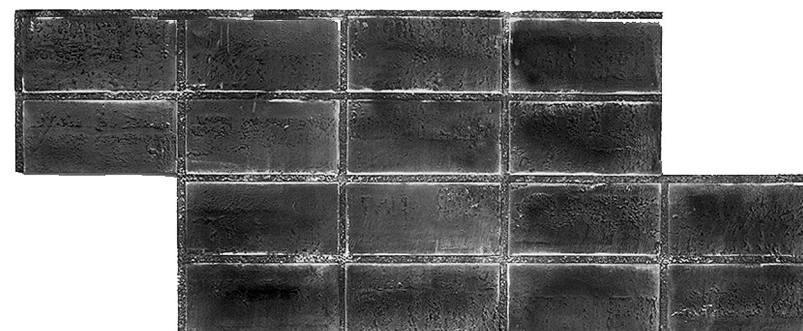

traditional **BRICKS**

PATTERN SHEET D-2000.01

This pattern sheet is meant as a reference only. Read the Scofield Tech-Data bulletin T-404 LITHOTEX Pavecrafters for additional information, layout suggestions, and installation instructions. Creating layouts for imprinted concrete requires skill and practice. Follow professional standards and practices, including those published by the American Concrete Institute (ACI).