


NEW BRICK
RUNNING BOND PATTERN
ORDER NUMBER 2010



Imprinted concrete pattern has been created using:

LITHOCHROME® Color Hardener
A-26 Brick Red

LITHOCHROME® Antiquing Release
4910 Slate Gray

SCOFIELD® Cureseal-W™ Semi Gloss

Texture Description:

Surface texture is that of new, unused brick.

Edges are straight. Corners are square.

Pattern Description:

Pattern is formed by common brick masonry units laid end-to-end in staggered rows. Bricks are 3-5/8" (92 mm) wide by 7-5/8" (194 mm) long. Inside joints have the appearance of a raked, rough, sandy grouted joint, 3/8" (10 mm) wide and 1/8" (3 mm) deep. Tool edges have an outside joint, 3/8" (10 mm) wide on selected sides, which matches the inside joints when tools are joined.

Also available:

New Brick Filler Tool 2200




Texturing Skin Tool 1010

PROFESSIONAL GRADE TOOLS - P2010

STANDARD GRADE TOOLS - S2010

FLEXIBLE TOOLS - F2010

Patterns that exceed 32" in any dimension are not recommended for use in Standard Grade.

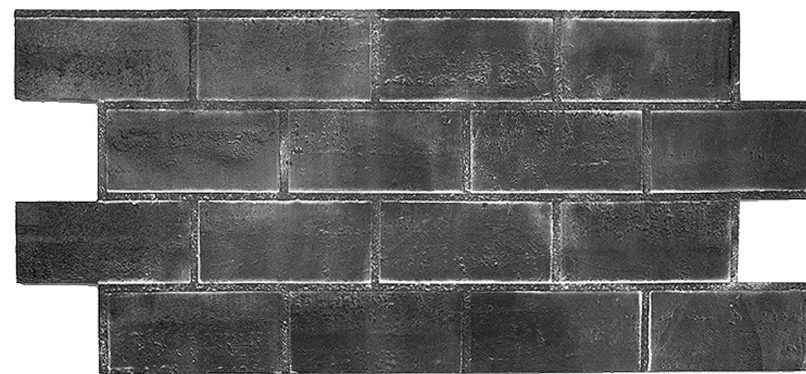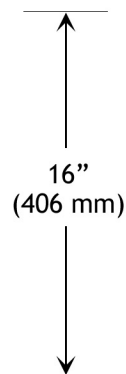

traditional **BRICKS**

PATTERN SHEET D-2010.01

This pattern sheet is meant as a reference only. Read the Scofield Tech-Data bulletin T-404 LITHOTEX Pavecrafters for additional information, layout suggestions, and installation instructions. Creating layouts for imprinted concrete requires skill and practice. Follow professional standards and practices, including those published by the American Concrete Institute (ACI).