


**NEW BRICK
HERRINGBONE PATTERN
ORDER NUMBER 2050**

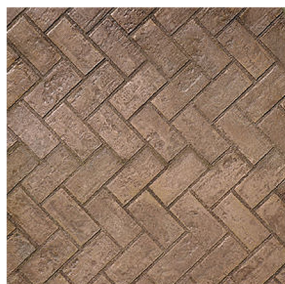

Imprinted concrete pattern has been created using:

LITHOCHROME® Color Hardener
A-53 Arizona Tan

LITHOCHROME® Antiquing Release
4388 Russet

SCOFIELD® Cureseal-W™ Semi Gloss

Texture Description:

Surface texture is that of new, unused brick.
Edges are straight. Corners are square.

Pattern Description:

Pattern is formed by common brick masonry units laid at right angles to each other. Bricks are 3-5/8" (92 mm) wide by 7-5/8" (194 mm) long. Inside joints have the appearance of a raked, rough, sandy grouted joint, 3/8" (10 mm) wide and 1/8" (3 mm) deep. Tool edges have an outside joint, 3/8" (10 mm) wide on selected sides, which matches the inside joints when tools are joined.

Also available:

Texturing Skin Tool 1010




Soldier Border for Herringbone 2060

PROFESSIONAL GRADE TOOLS - P2050

STANDARD GRADE TOOLS - S2050

FLEXIBLE TOOLS - F2050

Patterns that exceed 32" in any dimension are not recommended for use in Standard Grade.

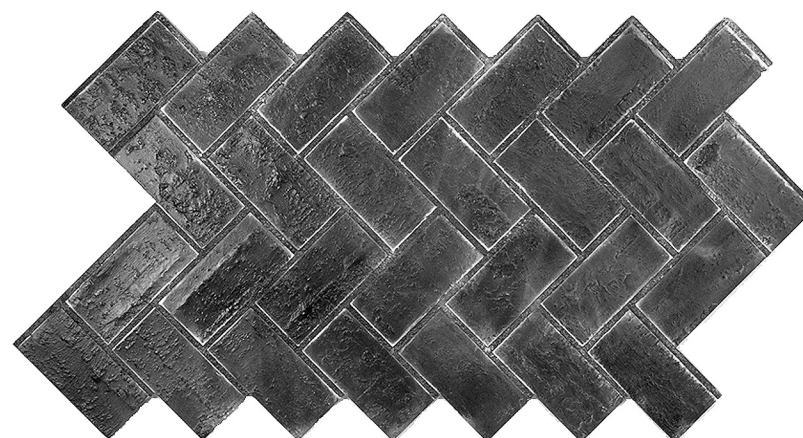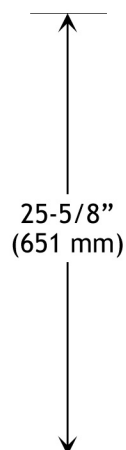

traditional **BRICKS**

PATTERN SHEET D-2050.01

This pattern sheet is meant as a reference only. Read the Scofield Tech-Data bulletin T-404 LITHOTEX Pavecrafters for additional information, layout suggestions, and installation instructions. Creating layouts for imprinted concrete requires skill and practice. Follow professional standards and practices, including those published by the American Concrete Institute (ACI).