



ARDEX ARDIFLO™ and the ARDEX Concrete Management Systems (ACMS)

Process and Pumping Innovation





Place



Consolidate



Strike off



Float / Restrect



Wet Cover Cure

Process Innovation – Rough Screed

In new construction applications, ARDEX Concrete Management Systems (ACMS) save time and labor costs by eliminating the traditional steel trowel step in the finishing process. Using this system, the contractor will only place, consolidate, strike off and bull-float/restraighten the surface and allow the bleed-water to dissipate. Following a wet-cover cure (3 to 7 day min.) and surface brush blast, a layer of ARDEX self-leveling underlayment is installed either immediately after deflection or during interior build out. In some cases, the system can be installed first using an ARDEX Moisture Control System to allow almost immediate installation of finished flooring while mitigating any future risks resulting from moisture emissions from the slab. The resulting finish delivers a concrete substrate capable of meeting the most demanding flatness and levelness tolerances for both the flooring and other interior trades while eliminating unplanned leveling and delays.

Innovative Products for an Innovative System

ARDEX MC™ Moisture Control Systems are formulated to suppress excessive moisture vapor emissions in new or existing concrete and are especially suited to treat areas of new concrete where the construction schedule does not allow adequate drying of the concrete.

ARDEX High-Capacity Self-Leveling Underlayments are designed for the POWERFLO™ High-Capacity Pump Trailer. These blends of Portland and other hydraulic cements provide the performance characteristics expected from an ARDEX product and handle the challenge of delivery through high-speed, long distance requirements. ARDEX HC 100™ and HC 100R™ provide a durable, flat, smooth floor surface with minimum labor.

ARDEX MC™ Moisture Control Systems



ARDEX HC 100™ High-Capacity Self-Leveling Underlayment
ARDEX HC 100R™ High-Capacity Rapid Self-Leveling Underlayment



For detailed performance parameters and installation instructions, please refer to www.ardexardiflo.com. Formatted specifications are available from your ARDEX Representative.

One Size Does Not Fit All – Choose the Right Delivery System

ROVER™ Rolling Barrel Cart

The ROVER™ eliminates the pains of the traditional barrel mixing and carrying process. Transportation of a three-bag batch, approximately 210 pounds, by a single installer is facilitated by the ROVER Rolling Barrel Cart that offers a precise and controlled pour. ROVER has full swivel, heavy duty caster wheels and a tilt mechanism constructed of robust steel with a compact and ergonomic design. Removable barrel sold separately.

AMP® Automatic Mixing Pump

The AMP® is a self-contained unit for mixing and pumping ARDEX materials 60 feet vertically and 200 feet horizontally at 350 PSI. The unit operates with one three-phase gear motor with a variable frequency drive system for conveying, mixing and pumping. State-of-the-art, electronic circuitries eliminate variables caused by power fluctuations. AMP features an onboard water booster pump with a cam-lock adapter and accessible shaft-in mixing tube and spray nozzle for easy cleaning. All units are reversible for operator safety.

Available models: AMP® 100 and AMP® 200

CUBE™ Medium-Capacity Mobile Mixing Pump

The CUBE™ mobile mixing pump is designed for outdoor location, eliminating freight elevators and material staging, dust, bag disposal and allowing single source for power and water. It will accept bulk super sacks of ARDEX material with a 7,500-pound bulk hopper with a bag-piercing device to provide top load capability. The CUBE has an in-line continuous mixer, rotor stator pump, on board generator and an optional crane. The CUBE is available in a standard model with 15,000 pounds of pumping capacity per hour and a high output model which pumps at 24,000 pounds per hour. The system also pumps 150 feet vertically and 400 feet horizontally. Available models; Standard and Gooseneck Hitch Trailer.

POWERFLO™ High-Capacity Pump Trailer

The POWERFLO™ pump trailers are designed for outdoor location, eliminating freight elevators and material staging, dust, bag disposal and allowing single source for power and water.

The self-contained mobile mixing and pumping giant has a silo capacity of 22,000 pounds with an articulating knuckle boom crane and remote control hydraulic hatch that make bulk loading a breeze. It pumps 150 feet vertically and 600 feet horizontally. For large footprint jobs, or when the site requires a deep fill fast, the POWERFLO is fully computerized and offers an output range up to 33,000 pounds per hour with remote controlled pump output.

For information, call your local ARDEX Sales Professional at 1-888-512-7339 or visit www.ardexardiflo.com.

ARDEX pumps are available for rent providing inventory is available.



Breakthrough Concrete Solutions

Despite concrete's durability, strength and versatility, the material's inherent properties present challenges as installation requirements become more complex. These challenges include curing and drying of slabs, labor-intensive placement and finishing and, for elevated concrete slabs, deflection.

In addition, specification and trade practices have built in a disparity in slab tolerance standards between Division 3 and 9, often challenging today's fast-track construction schedules with unplanned remedial floor leveling and the associated delays, costs and lack of accountability. In response to these unavoidable challenges, ARDEX developed ARDEX Concrete Management Systems (ACMS). ARDEX ACMS proactively addresses concrete construction issues through an innovative specified


finishing method for new concrete with an integrated system of moisture control and self-leveling underlayment products. ACMS is complemented by the ARDIFLO™ Systems, a range of high-technology pumping platforms that provide the ability to achieve a flat and level floor.

"Producing floors that are both level and flat after they have deflected has been my passion for more than 25 years. ARDEX Concrete Management Systems is an elegant solution to this challenge. Properly installed, ARDEX Concrete Management Systems ensures the owner and the design/construction team that the in-service flatness and levelness needs of their project will be achieved. The inclusion in the system of a moisture mitigation component that permits immediate installation of moisture-sensitive floor coverings is icing on the cake."

– Eldon Tipping
Structural Services, Inc.
Principal


Cast-In-Place Concrete System

Deflection occurs initially between form removal and installation of reshores and again after final removal of reshores

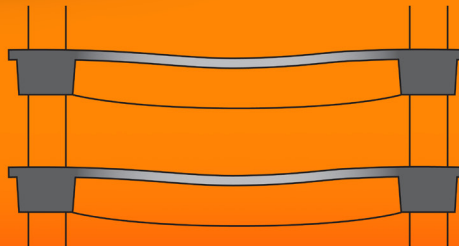

Concrete Slab on Metal Deck

Concrete and steel deflect immediately under weight

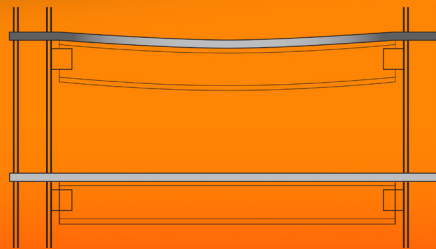

ARDEX Americas
400 Ardex Park Drive
Aliquippa, PA 15001
888-512-7339
www.ardexamericas.com
www.ardexardiflo.com

