



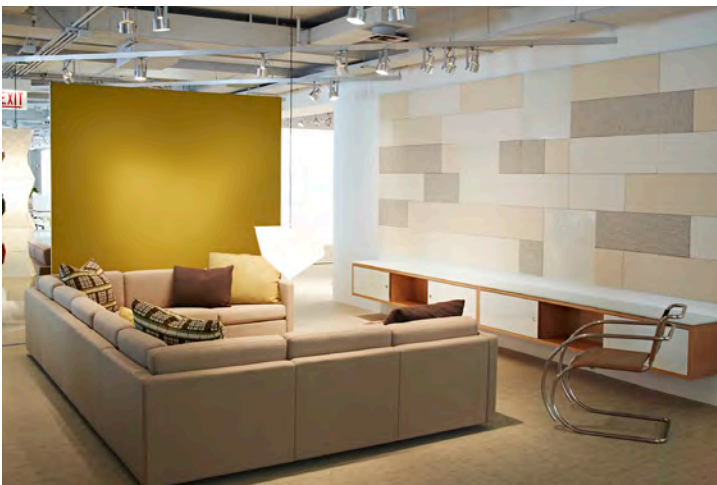

2mm Wool Design Felt

2mm Wool Design Felt

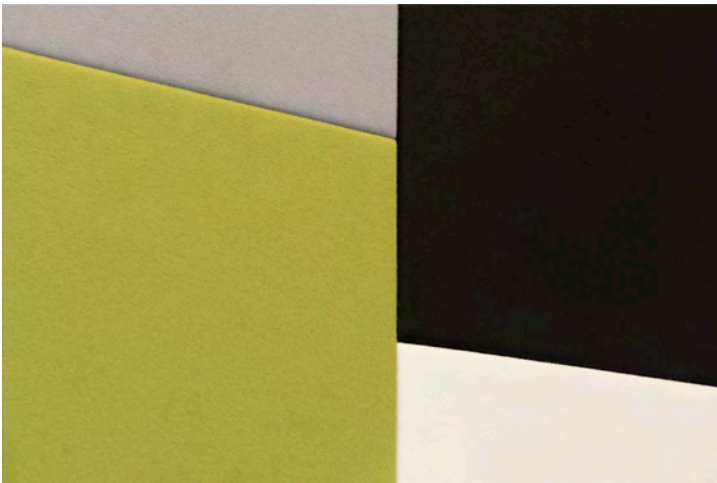

2mm Wool Design Felt is ideal for drapery, wrapped panels + tackboards, lifestyle and home goods. This nonwoven textile is naturally moisture-resistant, durable, renewable, and just plain gorgeous—perfect for a variety of applications! Please visit the About section at filzfelt.com for more information on the manufacturing process and characteristics of 100% Wool Design Felt.

Specifications

Name	2mm Wool Design Felt
Content	100% Merino or Karakul Wool
Origin	Germany
Thickness	2 mm (1/16 in)
Thickness Tolerance	±0.2 mm (±1/125 in)
Width	180 cm (70 3/4 in)
Width Tolerance	±4 cm (±1 3/5 in)
Weight	600 g / m² (36 oz / lin yd)
Backing	None
Primary Uses	Architectural Applications Drapery Lifestyle + Home Goods Wrapped Panels + Tackboards
Maintenance	Vacuum occasionally to remove general air-borne debris. Should soiling occur, clean with a mild, water-free dry cleaning solvent.
Durability	Light contract or residential (depending on application)
Custom	Custom colors and custom fabrication including cutting, lamination, stitching and embroidery available.
Variation	Wool felt is a natural material and minor changes and slight inclusions of natural fiber on the surface are evidence of the 100% natural origin of the material. The natural colorways are undyed wool and color variation may be more pronounced beyond normal commercial range.
Colorfastness to Light	Class 4-5 (40 hours)
Colorfastness to Crocking	Class 3-4 (wet), Class 4-5 (dry)
Environmental	Oeko-Tex® Standard 100 Certified Product Class II
Flammability	ASTM E 84: Class A (unadhered) CAL 117: Pass Euroclass EN 13501-1: 2007: B-s1-d0 (flame treated), D-s1-d0 (untreated) FAR 25.853(a): Pass (60 second vertical burn), Pass (12 second vertical burn) NFPA 260: Class 1 NFPA 701: Pass (flame treated)
Durability + Strength	ASTM D 3511 (Brush Pill Tester): Class 4 ASTM D 4966 (Martindale Abrasion Tester Method): 5,000 Grade 4, 10,000 Grade 3.5, 20,000 Grade 2 ASTM D 5034 (Grab Test): 105 lbs (avg of warp), 60 lbs (avg of weft)

Standard Colors

