



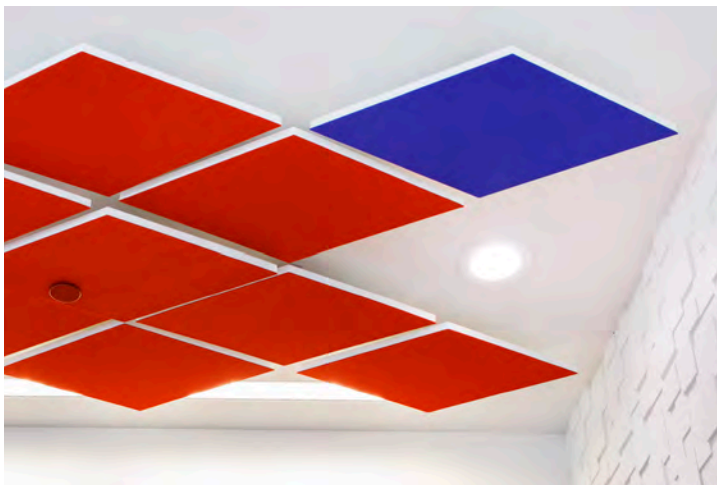

filzfelt


Akustika 25 Suspended

Akustika 25 Suspended

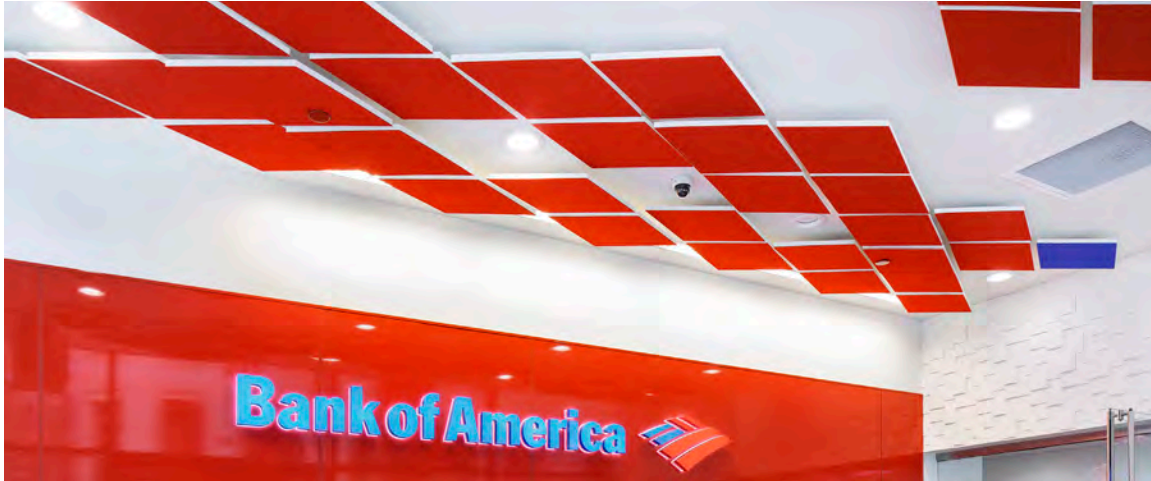


Akustika 25 Suspended is a customizable acoustic panel system with 3mm Wool Design Felt flush-mounted to one side and provides a hefty Noise Reduction Coefficient (NRC) rating of 0.90. These panels composed of recycled content are available in 63 colors of 3mm Wool Design Felt and ship complete with standard suspension hardware that allows for easy installation.

Drawings

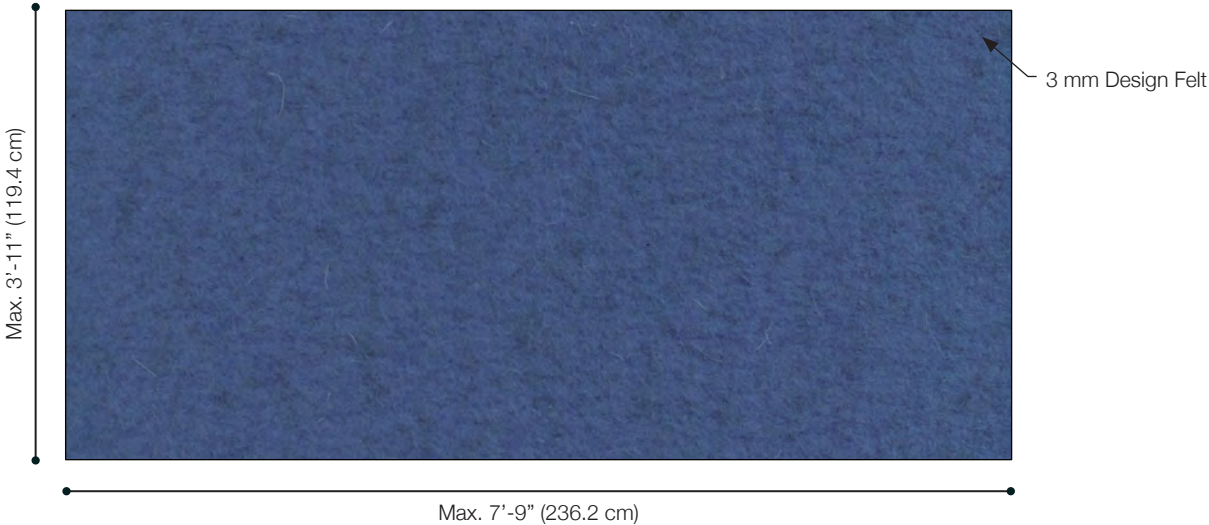


1 Reflected Ceiling Plan

Scale: Not To Scale

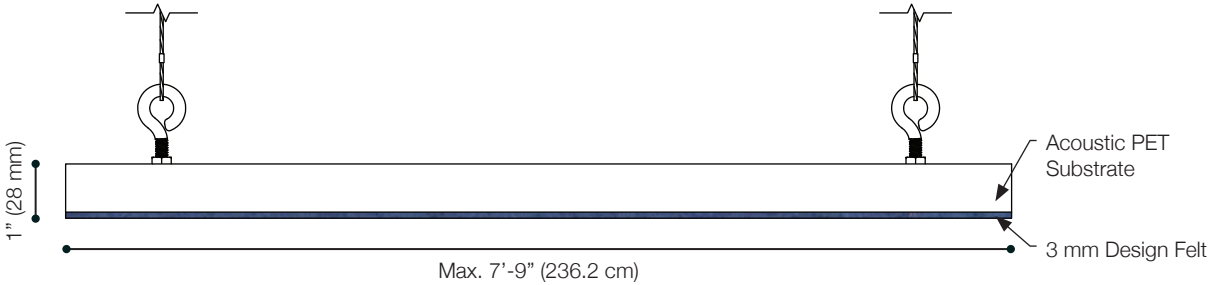

2 Side Elevation with Exposed Edge


Scale: Not To Scale

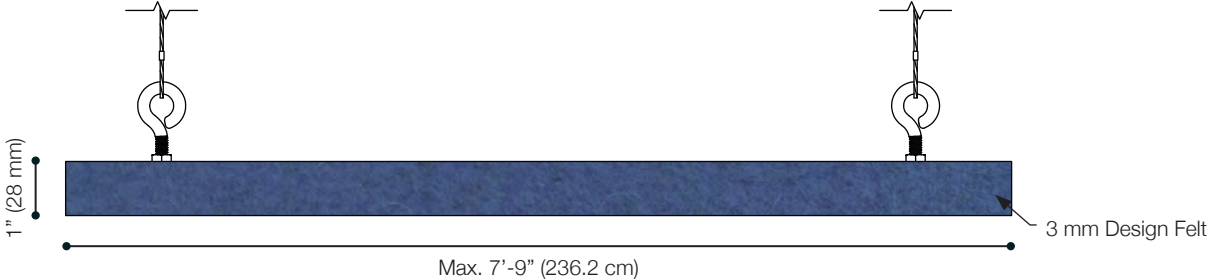

3 Side Elevation with Covered Edge

Scale: Not To Scale

Drawings

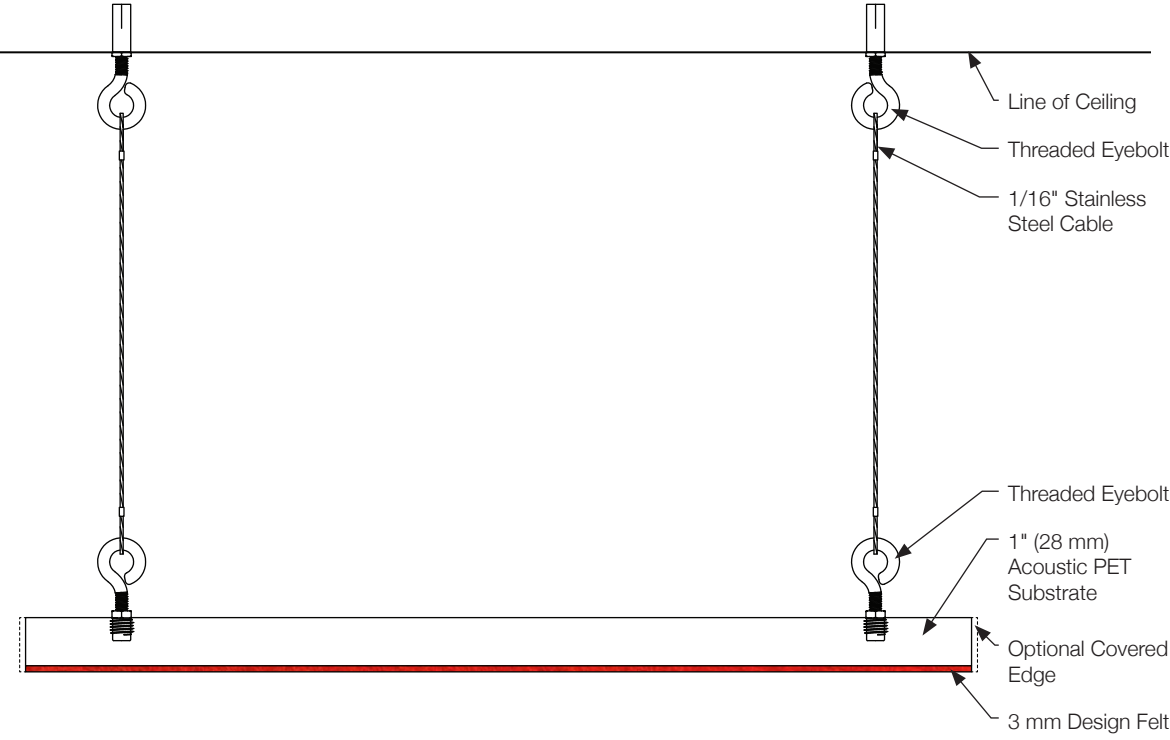

1 Section
Scale: 3" = 1'-0"

Specifications

Name	Akustika 25 Suspended
Construction	100% Wool Design Felt + Acoustic Substrate (60% Recycled PET, 40% Virgin PET)
Felt Thickness	3 mm (1/8 in)
Panel Thickness	28 mm (1 in)
Minimum Size	6 ft ² (0.56 m ²)
Maximum Size	3'-11" x 7'-9" (119.4 x 236.2 cm)
Edge	Exposed or Covered
Components	Includes one panel + suspension hardware with 3'-0" length of cable provided. (Ceiling screws not included.) Please note that standard pricing applies to square and rectangular shapes.
Maintenance	Vacuum occasionally to remove general air-borne debris. Should soiling occur, clean with a mild, water-free dry cleaning solvent.
Durability	Contract or residential
Lead Time	Akustika is made to order and certain lead times will apply.
Acoustics	ASTM C 423: NRC – 0.85, SAA – 0.85
Colorfastness to Light	Class 4-5 (40 hours)
Colorfastness to Crocking	Class 3-4 (wet), Class 4-5 (dry)
Flammability	ASTM E 84 Class A

Standard Felt Colors



Substrate Color

