


CARE



Standard Wrapped Wall Panel

Standard Wrapped Wall Panel

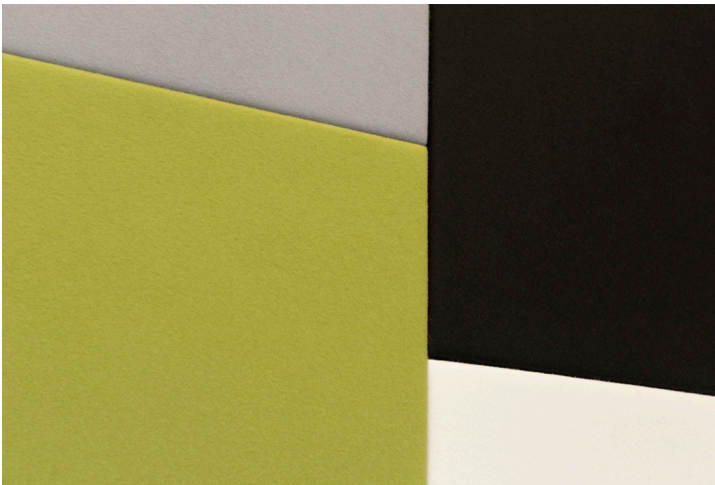

FilzFelt's 100% Wool Design Felt Wall Panels add softness, texture and color to any space. Standard construction consists of 2mm Wool Design Felt wrapped around a 15-ply Baltic birch plywood substrate and comes pre-installed with Z-Clip fasteners for easy hanging. Wrapped Wall Panels are available in standard sizes as listed below in 33 colors of 2mm Wool Design Felt.

Specifications

| | |
|----------------------------------|--|
| Name | Standard Wrapped Wall Panel |
| Construction | 100% Wool Design Felt + Baltic Birch Substrate |
| Felt Thickness | 2 mm (1/16 in) |
| Panel Thickness | 7/8 in (2.2 cm) Note: Z-Clips adds an additional 3/16 in (0.95 cm) to thickness |
| Minimum Size | 12 in x 18 in (30.5 cm x 45.7 cm) |
| Maximum Size | 48 in x 48 in (121.92 cm x 121.92 cm) |
| Durability | Contract or residential |
| Maintenance | Vacuum occasionally to remove general air-borne debris. Should soiling occur, clean with a mild, water-free dry cleaning solvent. |
| Installation | All panels comes preinstalled with Z-Clip fasteners for easy hanging. The Z-Clips provided are 6'-0" (approximately 1.8 m) in length and can be cut to fit according to site requirements. FilzFelt is able to provide installation services; however, application is basic and can be provided by a reputable general contractor. |
| Custom | Sizes beyond the minimum and maximum must be quoted. |
| Colorfastness to Light | Class 4-5 (40 hours) |
| Colorfastness to Crocking | Class 3-4 (wet), Class 4-5 (dry) |
| Flammability | ASTM E 84 Class B rated panel available upon request. Please note that an upcharge will apply. |

Standard Colors

