

Corral^{fi} Bollard

se'lux®

Scale: 1/8 inch = 1 foot



Ordering Matrix

For details and specifications, see current spec sheet ([CLICK HERE](#))

Series | COR Corralfi Bollard

Height | 2 Two Feet | 3 Three Feet | 4 Four Feet

Lamping MH | H050* 50w | H070 70w

Lamping HPS | S050* 50w | S070 70w

Lamping Compact Fluorescent | F32** 32w | F42** 42w

Finish | BK Black | WH White | BZ Bronze | SV Silver | SP Specify RAL#

Voltage | 120 | 208 | 240 | 277 | 347

Options | HS House Side Shield (180°)


* Only available in 120v and 277v

**Not available in 208v or 240v

[CLICK HERE FOR LAMP INFO.](#)


Photometry

COR-3-H070 (Type V Non-Cutoff/mounting ht. = 3')

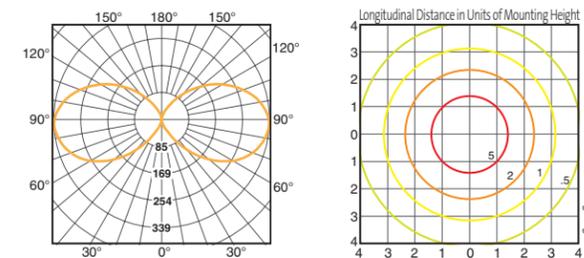

COR - 4

Ø 7 7/8"
(200mm)



Scale 1 : 30

Construction

- Die-cast aluminum top secures to extruded aluminum column with stainless steel fasteners
- UV-stabilized polycarbonate shielding surrounded by protective Corralfi rings

Lamping

- Compact Fluorescent or H.I.D. lamping up to 175w

Finish

- Multi-step cleaning and sealing process, high quality polyester powder coat finish ([CLICK HERE FOR DETAILS](#))

Certifications

- UL and ULC listed
- ASTM and PCI for finish