
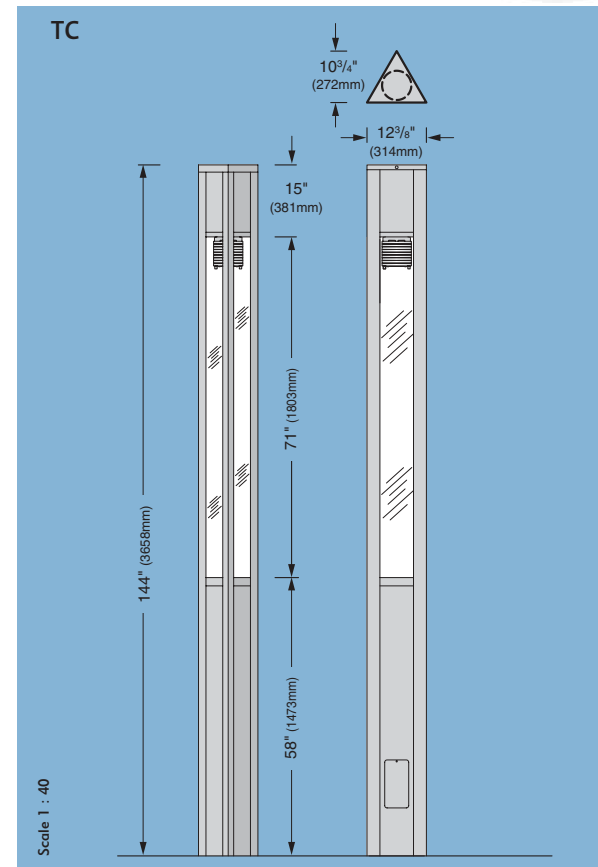



Triangular Column

se'lux®

Scale: 1/8 inch = 1 foot



Scale 1 : 40

Construction

- Die-cast and extruded aluminum components
- Totally sealed optic chamber

Lamping/Optics


- HID lamping up to 100 watts
- Choice of three refractors

Finish

- Multi-step process, high quality polyester powder coat finish ([CLICK HERE FOR DETAILS](#))

Certifications

- UL and ULC listed
- ASTM and PCI for finish

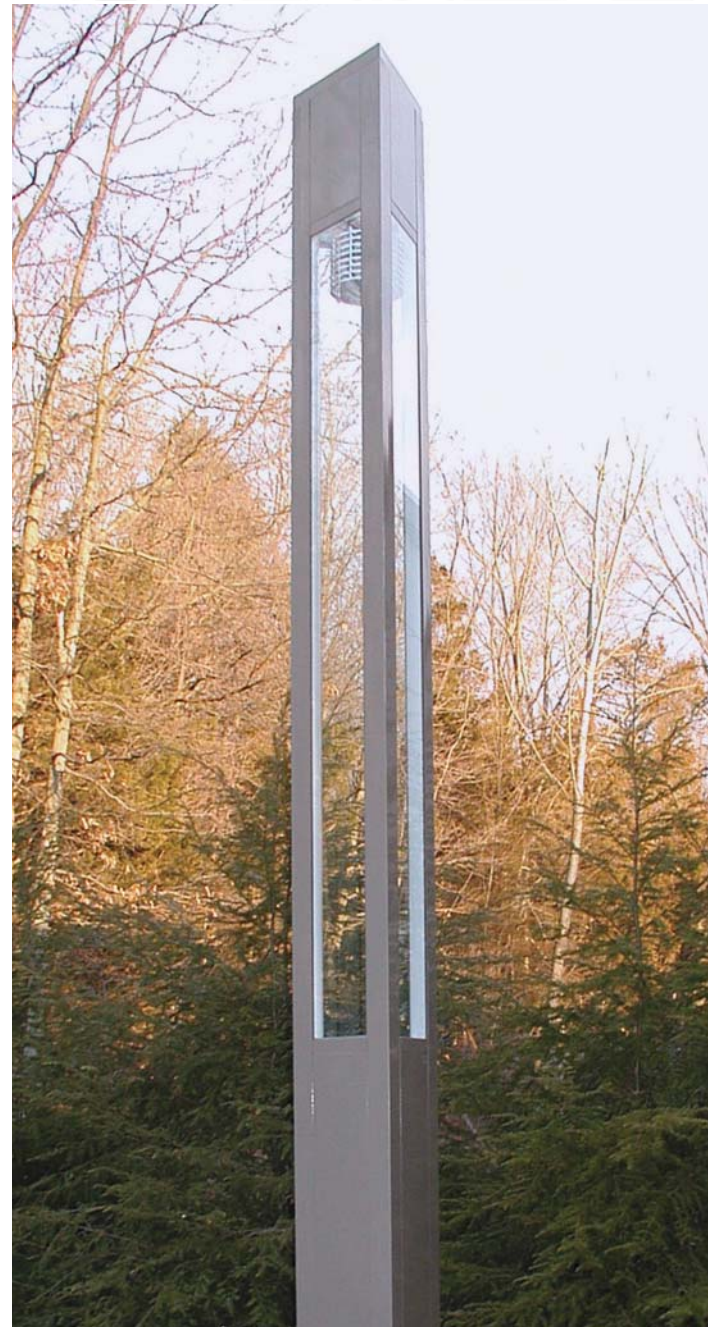

Ordering Matrix

For details and specifications, see current spec sheet ([CLICK HERE](#))

Series | **TC** Triangular Column

Shielding | **SP** Type V Silver Louver | **WP** Type V White Louver | **MR** Type V MTR 150 Refractor

Height | **12** Twelve Feet

Lamping MH | **H050*** 50w | **H070** 70w | **H100** 100w

Lamping HPS | **S050*** 50w | **S070** 70w | **S100** 100w

Finish | **BK** Black | **WH** White | **BZ** Bronze | **SV** Silver | **SP** Specify RAL#

Voltage | **120** | **208** | **240** | **277** | **347**

Options | **REC** GFCI Receptacle

* Only available in 120v and 277v

[CLICK HERE FOR LAMP INFO.](#)

Photometry

TC-SP-H070-012 (Type IV Non-Cutoff/height = 12')

