

Urbi 1

se'lux®



Construction

- Die-cast aluminum components
- Poles and arms designed for masterful integration with urban streetscapes

Lamping/Optics

- H.I.D. lamping 50w to 400w
- Full-Cutoff classifications

Design Features

- Two distinguished pole designs for both street and pedestrian applications


Finish

- High quality polyester powder coat finish

Certifications

- UL and ULC listed
- IP 54
- ASTM and PCI for finish

URB1

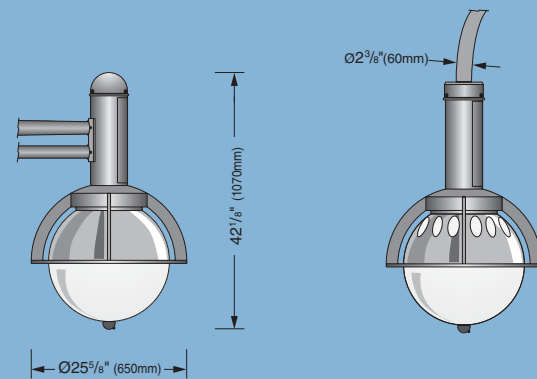

Scale 1 : 30

For more configurations see Urbi 1 spec sheet at www.selux.com/usa

Scale: 1/16 inch = 1 foot



Ordering Matrix

For details and specifications, see current spec sheet ([CLICK HERE](#))

Series | **URB1** Urbi 1

Mounting | **1** Single | **2** Double | **3** Triple | **4** Quadruple

Version | **P1** Pedestrian Version 1 | **P2** Pedestrian Version 2 | **S1** Street Version 1 | **S2** Street Version 2

Lamping MH | **H050** 50w | **H070** 70w | **H100** 100w | **H150** 150w | **H175** 175w | **H250** 150w | **H400** 175w

Lamping HPS | **S050** 50w | **S070** 70w | **S100** 100w | **S150** 150w | **S250** 250w | **S400** 400w

Voltage | **120** | **208** | **240** | **277** | **347**

Finish | **BK** Black | **WH** White | **BZ** Bronze | **SV** Silver | **SP** Specify RAL#

* Only available in 120v and 277v

Photometry

URB1-R2-xx-S250

(Type II Semi-Cutoff/mounting ht. = 16')

