




Urbi 3

se'lux®

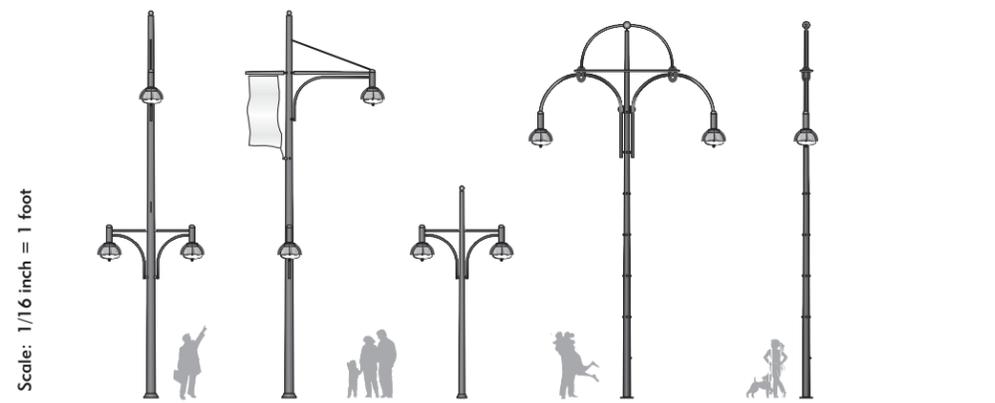

Construction

- Die-cast aluminum components
- Poles and arms designed for masterful integration with urban streetscapes

Lamping/Optics

- H.I.D. lamping 50w to 400w
- Full-Cutoff classifications

Design Features

- Two distinguished pole designs for both street and pedestrian applications


Finish

- High quality polyester powder coat finish

Certifications

- UL and ULC listed
- IP 54
- ASTM and PCI for fin-

URB3

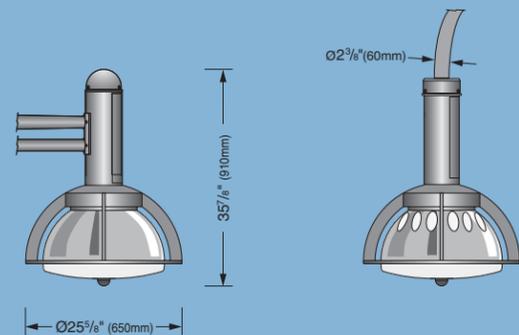

Scale 1 : 30

For more configurations see Urbi 3 spec sheet at www.selux.com/usa

Ordering Matrix

For details and specifications, see current spec sheet ([CLICK HERE](#))

Series | URB3 Urbi 3

Mounting | 1 Single | 2 Double | 3 Triple | 4 Quadruple

Version | P1 Pedestrian Version 1 | P2 Pedestrian Version 2 | S1 Street Version 1 | S2 Street Version 2

Lamping MH | H050 50w | H070 70w | H100 100w | H150 150w | H175 175w | H250 150w | H400 175w

Lamping HPS | S050 50w | S070 70w | S100 100w | S150 150w | S250 250w | S400 400w

Voltage | 120 | 208 | 240 | 277 | 347

Finish | BK Black | WH White | BZ Bronze | SV Silver | SP Specify RAL#

* Only available in 120v and 277v

Photometry

URB3-R2-xx-S250

(Type II Semi-Cutoff/mounting ht. = 16')

