

Construction

- Pressure die-cast, high quality GD-ALSi 12 aluminum housing and components
- Precision, high purity aluminum computer designed reflectors
- Optional flush glass to prevent dust and water buildup in uplight situations

Lamping/Optics

- 13w to 18w compact fluorescent, 35w to 100w HID, or 35w to 120w halogen
- More than 15 distinct beam patterns

Mounting Options/Accessories


- Flexible mounting with many options
- Unique gimbal based "Cardanic Systems" user configurable mounting systems
- Full range of accessories includes ring louvers, colored lenses, dichroic filter, field rotatable spread lens, snoots, etc.

Finish

- High quality polyester powder coat finish (CLICK HERE FOR DETAILS)

Certifications

- UL and ULC listed
- IP 65
- ASTM and PCI for finish

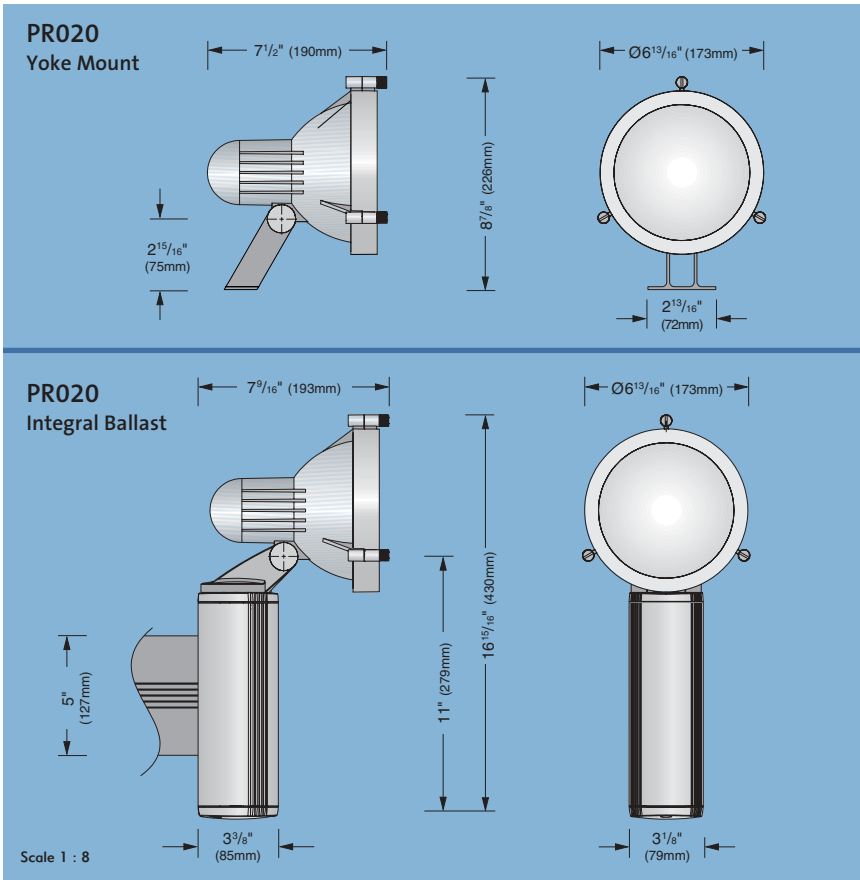

Ordering Matrix

For details and specifications, see current spec sheet (CLICK HERE)

Series | **PR020** SILL® PRO 20 Floodlight

Beam Pattern | **SN** Narrow Spot | **SM** Medium Spot | **SW** Wide Spot | **FN** Narrow Flood | **FM** Medium Flood | **FW** Wide Flood | **HN** Horiz. Narrow | **VN** Vert. Narrow | **HM** Horiz. Medium | **VM** Vert. Medium | **HW** Horiz. Wide | **VW** Vert. Wide | **SP** 10° Spot | **WS** 12°/15° Spot | **FL** 25° Spot | **WS** 12° Spot | **WF** 60° Wide Flood |

Lamping Ceramic Metal Halide | **H035T6*** 35w T6 | **H070T6*** 70w T6 | **070PAR38** 70w PAR38 | **100PAR38** 100w PAR38

Lamping Compact Fluorescent | **1F13** 13w | **1F18** 18w

Lamping Quartz Halogen (QT GY6.35 12V) | **Q035** 35w | **Q050** 50w | **Q075** 75w | **Q090** 90w

Lamping Halogen (PAR38) | **060PAR38** 60w PAR38 | **080PAR38** 80w PAR38 | **120PAR38** 120w PAR38

Voltage | **12V** | **120** | **277** | **347** || **Finish** | **BK** Black | **WH** White | **BZ** Bronze | **SV** Silver | **SP** Specify RAL#

Mounting | **S** Stake Mount | **W** Wall Mount | **B** Bracket Mount | **O** Outrigger Mount | **1** Single Pole Top | **2** Double Pole Top | **3** Triple Pole Top | **4** Quad Pole Top | **Y** Yoke Mount (for Remote Ballast and Halogen lamps only)


Options | **RB** Remote Ballast | **RLX** Ring Louver External | **S18** Snoot 180° | **S36** Snoot 360° | **SLR** Field Rotatable Spread Lens

* Includes electronic ballast


CLICK HERE FOR LAMP INFO.

Photometry

PR020-SW-1F18

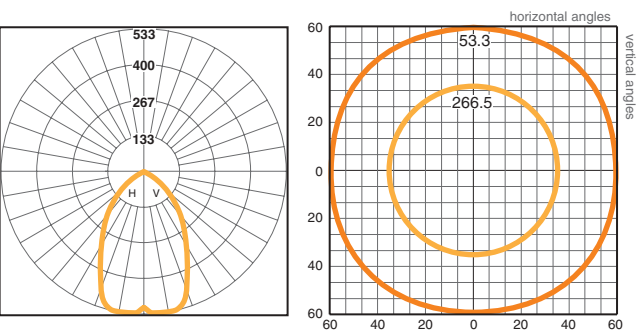

PR020-SN-H070T6-RL

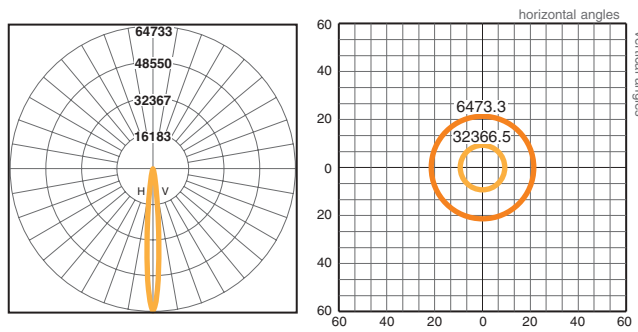

For more options, see our website at www.selux.com/usa