
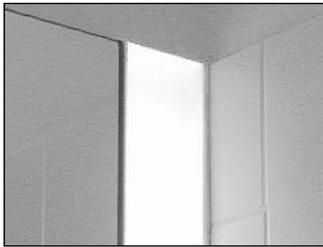


M100 Super Recessed Linear Fluorescent Flanged Extrusion - STAGGERED LAMPS



Project: _____ **Type:** _____ **Qty:** _____

Fixture Series	Lamp Type	Upper Shielding	Lower Shielding	Mounting	Nominal Length	Finish	Voltage


Options (refer to separate data sheets for ordering codes and details)

Fixture Series	Lamp Type	Lower Shielding	Mounting	Nominal Length	Finish	Voltage	Options
M1B1S M100 Super Recessed Continuous Flange (Flanged Extrusion/ Flanged Endcaps) Staggered Lamps	1T5 F28T5 1T5HO F54T5HO	SA Specular Parabolic MA Matte Parabolic MP Silky Specular Parabolic PL Matte Perforated Parabolic	SH Suspension Clips TS 1" Studs (factory installed) RC Rotating Crossbars PM Perimeter Mount	008 8 foot 012 12 foot For actual lengths see following page. For other lengths, configurations indicate nominal length rounded to the next highest foot. Factory will supply layout drawings. Individual fixtures cannot be field joined.	WH White BK Black SV Silver SP Specify RAL#	120 277 347	TB Lengths to Fit 2' Grid T-Bar Ceiling System (qty)EM Stand-by Battery Pack ¹ (prefix quantity, i.e. - 5EM) FS Single Fusing DM Dimming ¹ (specify system) DMA Digital Addressable Dimming ¹ FW Flex Whip (standard) FW1 Flex Whip (dimming) Track Eutrac Standard ² DL Suitable for Damp Locations CCEA Chicago Plenum Downlights (See MR16 spec sheets, pp.98-99)
	2T5 (2x)F28/T5	SD Satine Lens OD Extra Diffuse Lens X None					
M1B2S M100 Super Recessed Flush End (Flanged Extrusion/ Flangeless Endcaps) Staggered Lamps		Upper Shielding SD Satine Lens OD Extra Diffuse Lens X None					


¹Must be low profile ballasts (1 1/2" W x 1 3/16" H); consult factory for details. ²Consult factory for details.

Mounting Diagrams


Suspension Clips (SH)




Pre-installed Rod (TS)



Rotating Crossbars (RC)


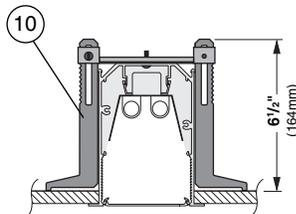


Perimeter Mount (PM)

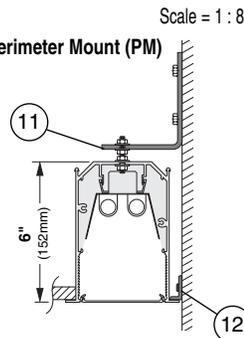

Track

Track insert including track available for all configurations, consult factory for details.

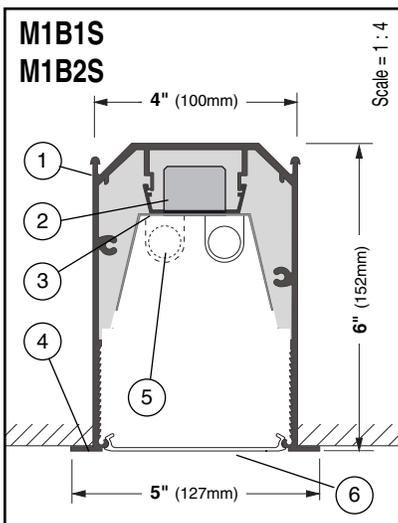

1. Housing - Continuous, 6063-T5 extruded aluminum profile up to 16 feet long. Joined with Connector Plus Joining System for ease of installation and to assure a uniform appearance.

2. Ballast - Electronic, high power factor, class "P", type "A" sound rating. Specify 120v, 277v, or 347v. Ballast is factory pre-wired with leads to one end of fixture. Consult factory for ballast options.

3. Gear Tray - Die formed gear tray with integral factory preset sliding covers to fill extrusion with light, with a matt white finish for even illumination. Geartray installs as complete electrical unit and is held in place with knurled dress nuts. It is fully accessible from below ceiling.

4. Flange - 1/2" (12mm) wide flange runs full lengths of both sides and is part of the main extruded body. Specify continuous flange (M1B1S) or flush end (M1B2S).

5. Lamps - As noted (by others). Other lamp lengths or wattages available, consult factory.

6. Shielding - Louvers offer excellent glare control in longitudinal, lateral, and all diagonal planes. High quality aluminum louvers and acrylic shielding allow true freedom of layout for today's modern spaces. See page 8 for details.

7. Spring Steel Suspension Clips - Supplied two places, located nominally every 4 ft. Support wires supplied and installed by others.

8. Pre-installed 1" 1/4-20 Stud - Attached to fixture every nominal 4 feet.

9. Coupling and Threaded Rod to Structure - Supplied and installed by others.

10. Rotating Crossbar - For inaccessible ceilings, adjustable for ceiling thicknesses from 1/4" to 2". Support required nominally every 4 feet.

11. Steel Wall Bracket and 1/4-20 Rod - Supplied nominally every 4 ft. (Fasteners to wall and wall anchors by others)

12. Aluminum Wall Bracket - Secured to wall (fasteners and wall anchors by others) and runs entire length of fixture. Also supplied for width of fixtures when supplied with continuous flange. Allows for 1/8" gap between flange and wall to create shadow line allowing for unevenness of wall.

Interior Luminaire Finish - Standard interior colors are White (WH), Black (BK) and Silver (SV). RAL colors (SP) are available, please specify RAL#.


SELUX Corp. © 2006
 TEL: (845) 691-7723
 FAX: (845) 691-6749
 www.selux.com/usa
 M1B1S-01 (v5.0)




In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.selux.com/usa are the most recent versions and supercede all other printed or electronic versions.

M1B1S/M1B2S (Single Staggered Lamps) Standard Layout Dimensions

Nominal 8 foot Individual

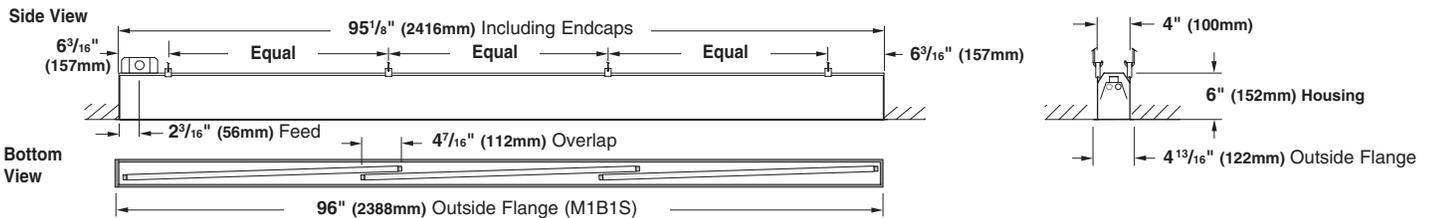


Nominal 12 foot Individual

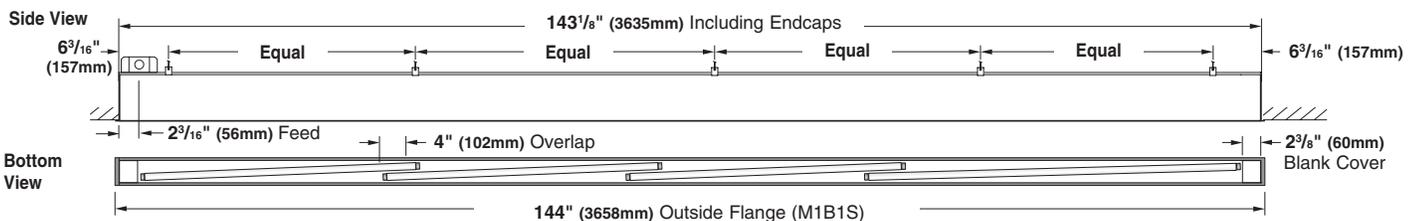


M1B1S (Single Staggered Lamps) T-Bar Layout Dimensions (option - TB)

Nominal 8 foot Individual

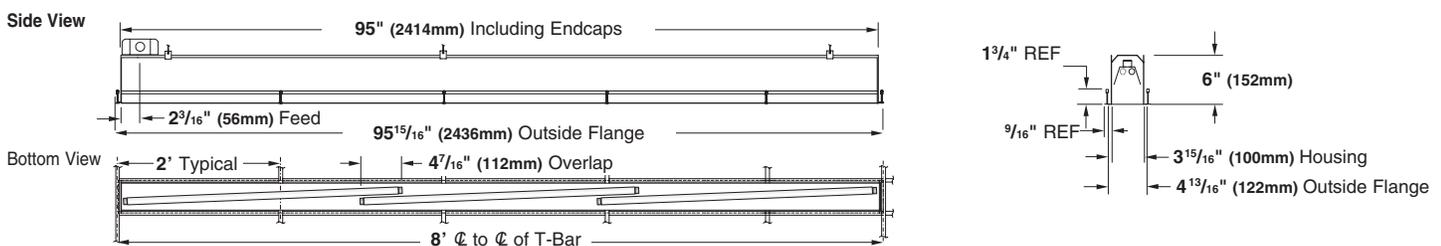

Nominal 12 foot Individual

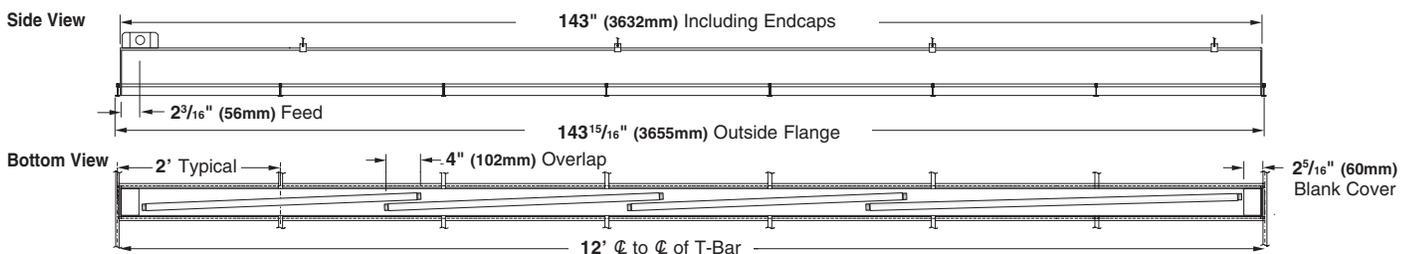


Suspensions supplied spaced nominally every 4 feet. Fixture supplied with 7/8 knockout located 2 3/16" from end in top of fixture. See chart on page 6 for optimal custom lengths under 18 ft. Any length over 18 ft. possible, see below.

For other lengths, lamping, continuous runs or configurations please specify overall length (in feet), accessories desired and sketch/drawing of configuration. SELUX will detail project drawings upon order and supply submittal drawings for approval. Individual fixtures cannot be field joined. If you have any questions please contact SELUX customer service or applications engineering for assistance (1-800-SELUX-CS).

M1B1S/M1B2S (Double Staggered Lamps) Layout Dimensions -

Factory will provide submittal drawings. See chart on page 7 for lengths under 22 ft.

Staggered Lamps Principle

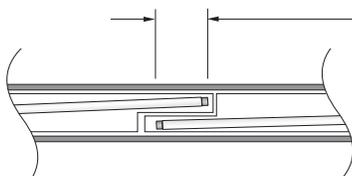

Lamps are spaced with 4" to 6" overlap to completely illuminate luminaire and eliminate socket shadows. Factory will supply approval drawings for other lengths using combinations of 21W & 28W T5 lamps or 39W & 54W T5HO lamps.

Minimal socket shadows may be visible at certain angles. Refer to page 8 for more information.