
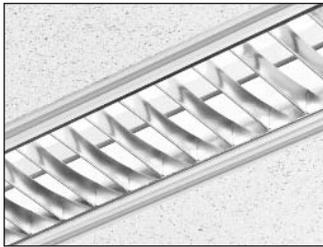


M100 Super Recessed Linear Fluorescent Slot Grid / Thick Ceiling Panel





Project: _____ **Type:** _____ **Qty:** _____

M1B0	_____	_____	_____	_____	_____	_____	_____
Fixture Series	Lamp Type	Upper Shielding	Lower Shielding	Mounting	Nominal Length	Finish	Voltage
_____	_____	_____	_____	_____	_____	_____	_____

Options (refer to separate data sheets for ordering codes and details)

Fixture Series	Lamp Type	Shielding	Mounting	Nominal Length	Finish	Voltage	Options
M1B0 M100 Super Recessed Multi-Mount Form	1T5 F28T5	SA Specular Parabolic	SG Slot Grid ¹ DC Ceiling Panels up to 2" thick (lengths per submittal drawings)	004 4 foot	WH White	120	(qty.)EM Stand-by Battery Pack ² (prefix quantity, i.e. - 5EM) FS Single Fusing DM Dimming ² (specify system) DMA Digital Addressable Dimming ² SI Satine Acrylic Inlay ⁴ FW Flex Whip (standard) FW1 Flex Whip (dimming) Track Eutrac Standard ³ DL Suitable for Damp Locations CCEA Chicago Plenum Downlights (See MR16 spec sheets, pp.98-99)
	2T5 (2x)F28/T5	MA Matte Parabolic		008 8 foot	BK Black	277	
	1T5HO F54T5HO	MP Silky Specular Parabolic		012 12 foot	SV Silver	347	
	1T8 F032/T8	PL Matte Perforated Parabolic SD Satine Lens OD Extra Diffuse Lens X None		For actual lengths see following page. For other lengths, configurations indicate nominal length rounded to the next highest foot. Factory will supply layout drawings. Individual fixtures cannot be field joined.	SP Specify RAL#		

¹T5 & T5HO lamps only, consult factory for other lamps. ²Must be low profile ballasts (1 1/2" W x 1 3/16" H); consult factory for details. ³Consult factory for details. ⁴SA, MA, MP & PL shieldings only.

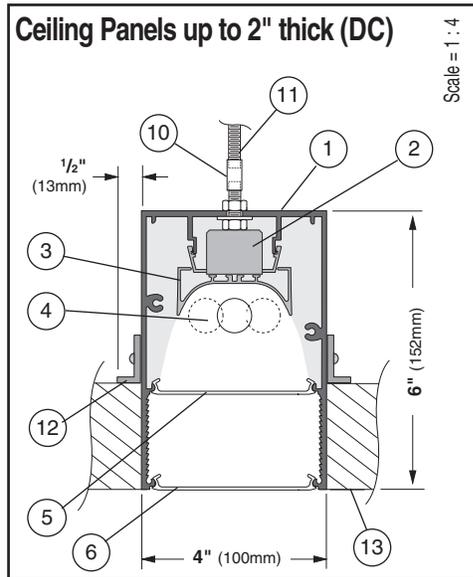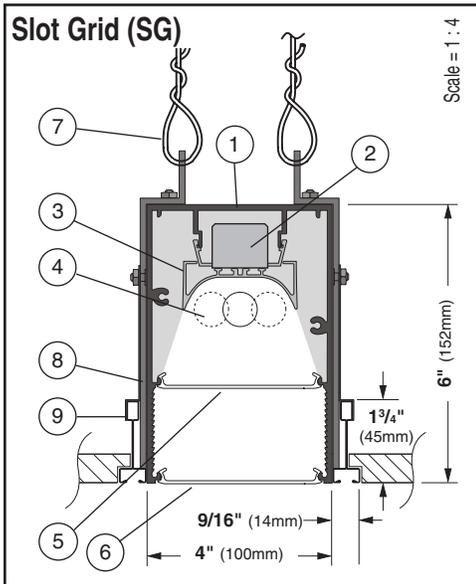

1. Housing - Continuous, 6063-T5 extruded aluminum profile up to 16 feet long. Joined with Connector Plus Joining System for ease of installation and to assure a uniform appearance.

2. Ballast - Electronic, high power factor, class "P", type "A" sound rating. Specify 120v, 277v, or 347v. Ballast is factory pre-wired with leads to one end of fixture. Consult factory for ballast options.

3. Gear Tray - Extruded aluminum, with white painted finish. Gear tray installed as a complete electrical unit and is held in place with knurled dress nuts. It is fully accessible from below ceiling.

4. Lamps - As noted (by others). Other lamp lengths or wattages available, consult factory.

5. Upper Shielding - Louvers offer excellent glare control in longitudinal, lateral, and all diagonal planes. High quality aluminum louvers and acrylic shielding allow true freedom of layout for today's modern spaces.

6. Lower Shielding - Same options as Upper Shielding #5.

7. Support Wire to Structure - Supplied and installed by others.

8. Support bracket - Supplied nominally every four feet.

9. Slot Grid Beam and Cross Tees - Supplied and installed by others.

10. Pre-installed 1" 1/4-20 Stud - Attached to fixture every nominal 4 feet.

11. Coupling and Threaded Rod to Structure - Supplied and installed by others.

12. Aluminum Angle Brackets - Run entire length of fixture to block view into plenum area from below fixture.

13. Ceiling Panels up to 2 inch Thick - Supplied and installed by others. Suitable for Decoustic[®] ceiling panel installations. Other ceiling systems possible, please consult factory. Decoustic[®] is a registered trademark of Decoustics Ltd. Corporation.

Interior Luminaire Finish - Standard interior colors are White (WH), Black (BK) and Silver (SV). RAL colors (SP) are available, please specify RAL#.

SELUX Corp. © 2006
TEL: (845) 691-7723
FAX: (845) 691-6749
www.selux.com/USA
M1B0_SG-01 (v5.0)




In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.selux.com/usa are the most recent versions and supersede all other printed or electronic versions.

M1B0 Slot Grid Layout Dimensions


For T5 lamps only, for other lamping consult factory.

Nominal 4 foot Individual


Typical End View (all lengths)

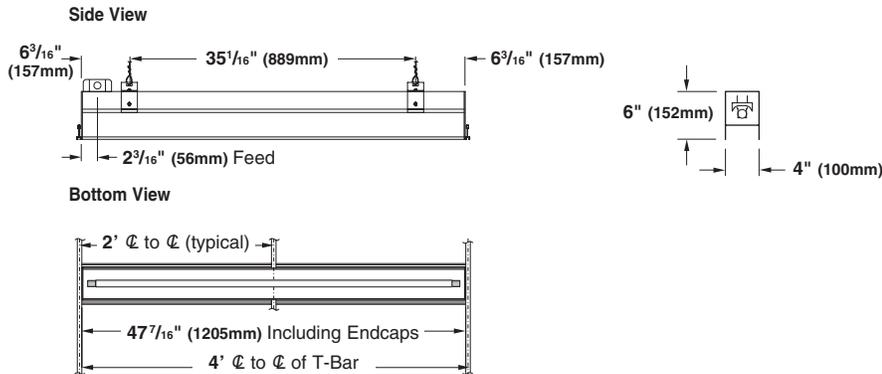

Nominal 8 foot Individual

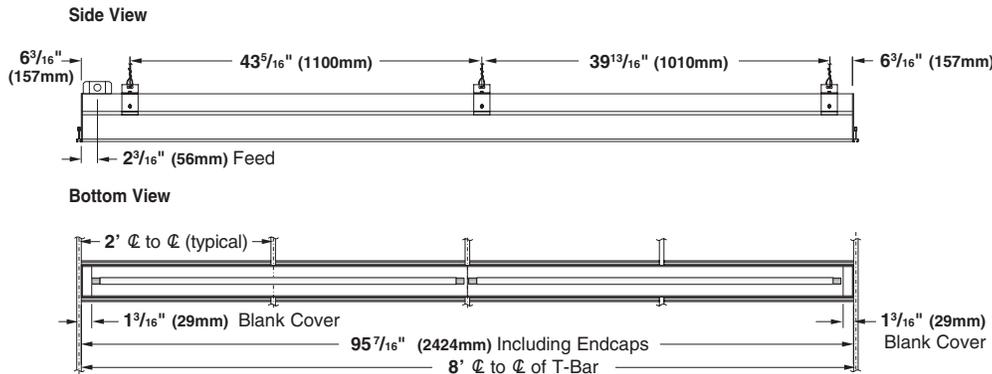

Nominal 12 foot Individual

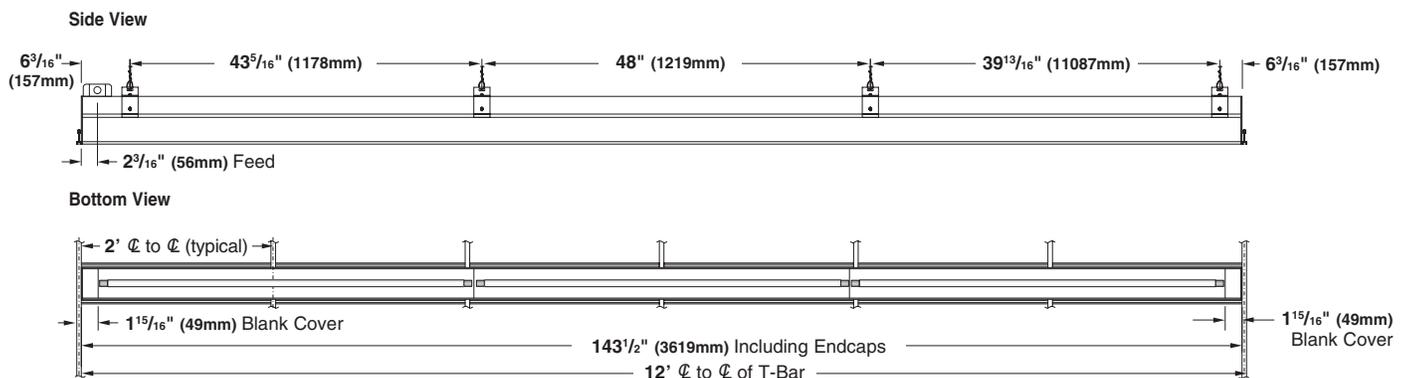

Fixture supplied with 7/8 knockout located 2 3/16" from end in top of fixture.

For other lengths, lamping, continuous runs or configurations please specify overall length (in feet), accessories desired and sketch/drawing of configuration. SELUX will detail project drawings upon order and supply submittal drawings for approval. Individual fixtures cannot be field joined. If you have any questions please contact SELUX customer service or applications engineering for assistance (1-800-SELUX-CS).