
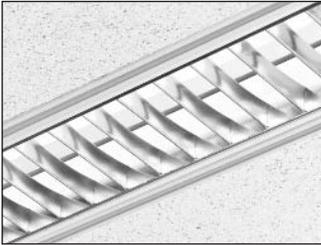


# M100 Recessed Linear Fluorescent Slot Grid / Thick Ceiling Panel





**Project:** \_\_\_\_\_ **Type:** \_\_\_\_\_ **Qty:** \_\_\_\_\_

M10	---	---	---	---	---	---
<b>Fixture Series</b>	<b>Lamp Type</b>	<b>Shielding</b>	<b>Mounting</b>	<b>Nominal Length</b>	<b>Finish</b>	<b>Voltage</b>
---	---	---	---	---	---	---

**Options** (refer to separate data sheets for ordering codes and details)

Fixture Series	Lamp Type	Shielding	Mounting	Nominal Length	Finish	Voltage	Options
<b>M10</b> M100 Recessed Multi-Mount Form	<b>1T5</b> F28T5	<b>SA</b> Specular Parabolic	<b>SG</b> Slot Grid <sup>1</sup>	<b>004</b> 4 foot	<b>WH</b> White	<b>120</b>	(qty.) <b>EM</b> Stand-by Battery Pack <sup>2</sup> (prefix quantity, i.e. - <b>5EM</b> ) <b>FS</b> Single Fusing <b>DM</b> Dimming <sup>2</sup> (specify system) <b>DMA</b> Digital Addressable Dimming <sup>2</sup> <b>SI</b> Satine Acrylic Inlay <sup>4</sup> <b>FW</b> Flex Whip (standard) <b>FW1</b> Flex Whip (dimming) <b>Track</b> Eutrac Standard <sup>3</sup> <b>DL</b> Suitable for Damp Locations <b>CCEA</b> Chicago Plenum <b>Downlights</b> (See MR16 spec sheets, pp.98-99)
	<b>2T5</b> (2x)F28/T5	<b>MA</b> Matte Parabolic	<b>DC</b> Ceiling Panels up to 2" thick (lengths per submittal drawings)	<b>008</b> 8 foot	<b>BK</b> Black	<b>277</b>	
	<b>1T5HO</b> F54T5HO	<b>MP</b> Silky Specular Parabolic		<b>012</b> 12 foot	<b>SV</b> Silver	<b>347</b>	
	<b>1T8</b> F032/T8	<b>PL</b> Matte Perforated Parabolic		For actual lengths see following page. For other lengths, configurations indicate nominal length rounded to the next highest foot. Factory will supply layout drawings. Individual fixtures cannot be field joined.	<b>SP</b> Specify RAL#		

<sup>1</sup>T5 & T5HO lamps only, consult factory for other lamps. <sup>2</sup>Must be low profile ballasts (1 1/2" W x 1 3/16" H); consult factory for details. <sup>3</sup>Consult factory for details. <sup>4</sup>SA, MA, MP & PL shieldings only.

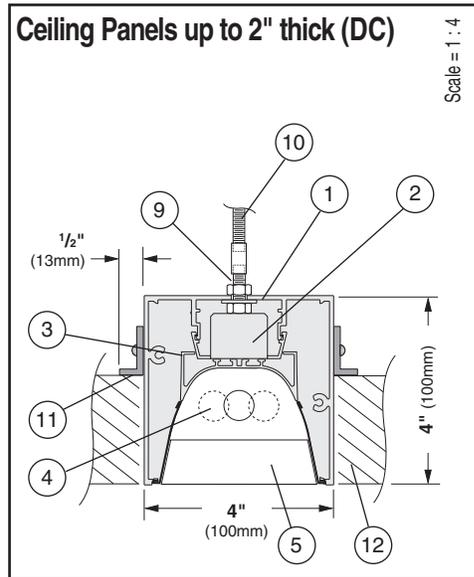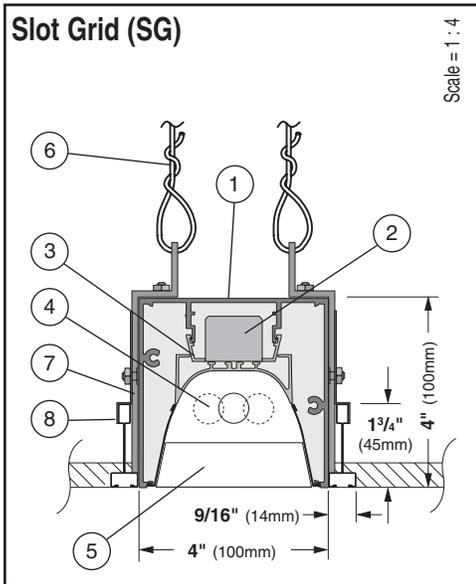

**1. Housing** - Continuous, 6063-T5 extruded aluminum profile up to 16 feet long. Joined with Connector Plus Joining System for ease of installation and to assure a uniform appearance.

**2. Ballast** - Electronic, high power factor, class "P", type "A" sound rating. Specify 120v, 277v, or 347v. Ballast is factory pre-wired with leads to one end of fixture. Consult factory for ballast options.

**3. Gear Tray** - Extruded aluminum, with white painted finish. Gear tray installed as a complete electrical unit and is held in place with knurled dress nuts. It is fully accessible from below ceiling.

**4. Lamps** - As noted (by others). Other lamp lengths or wattages available, consult factory.

**5. Shielding** - Louvers offer excellent glare control in longitudinal, lateral, and all diagonal planes. High quality aluminum louvers and acrylic shielding allow true freedom of layout for today's modern spaces.

**6. Support wire to structure** - Supplied and installed by others.

**7. Support bracket** - Supplied nominally every four feet.

**8. Slot grid beam and cross tees** - Supplied and installed by others.

**9. Pre-installed 1" 1/4-20 Stud** - Attached to fixture every nominal 4 feet.

**10. Coupling and Threaded Rod to Structure** - Supplied and installed by others.

**11. Aluminum angle brackets** - Run entire length of fixture to block view into plenum area from below fixture.

**12. Ceiling Panels up to 2 inch thick** - Supplied and installed by others. Suitable for Decoustic<sup>®</sup> ceiling panel installations. Other ceiling systems possible, please consult factory. Decoustic<sup>®</sup> is a registered trademark of Decoustics Ltd. Corporation.

**Interior Luminaire Finish** - Standard interior colors are White (WH), Black (BK) and Silver (SV). RAL colors (SP) are available, please

SELUX Corp. © 2006  
 TEL: (845) 691-7723  
 FAX: (845) 691-6749  
 www.selux.com/USA  
 M10\_SG-01 (v5.0)



Union Made Affiliated  
 with IBEW Local 363


In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.selux.com/usa are the most recent versions and supercede all other printed or electronic versions.

## M10 Slot Grid Layout Dimensions


For T5 and T5HO lamps only, for other lamping consult factory.

### Nominal 4 foot Individual


### Typical End View (all lengths)

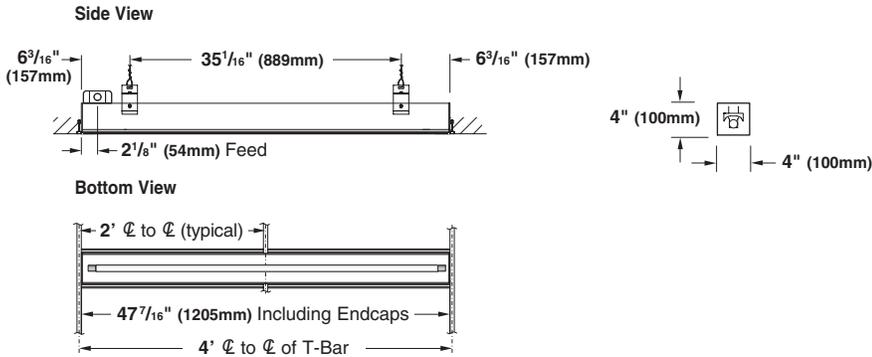

### Nominal 8 foot Individual

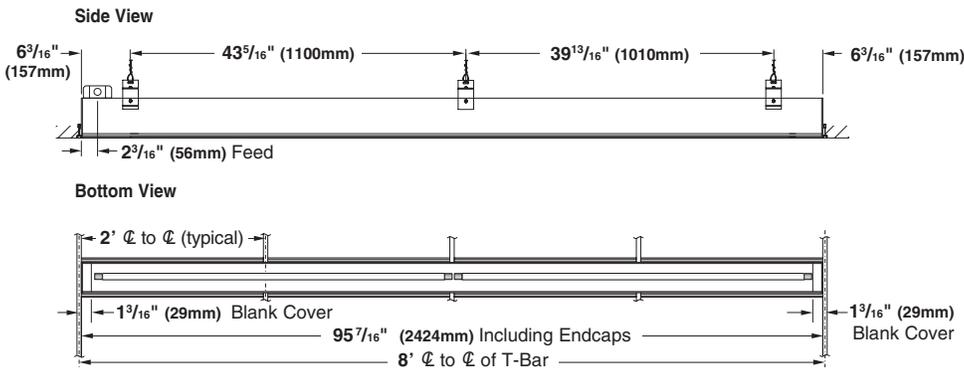

### Nominal 12 foot Individual

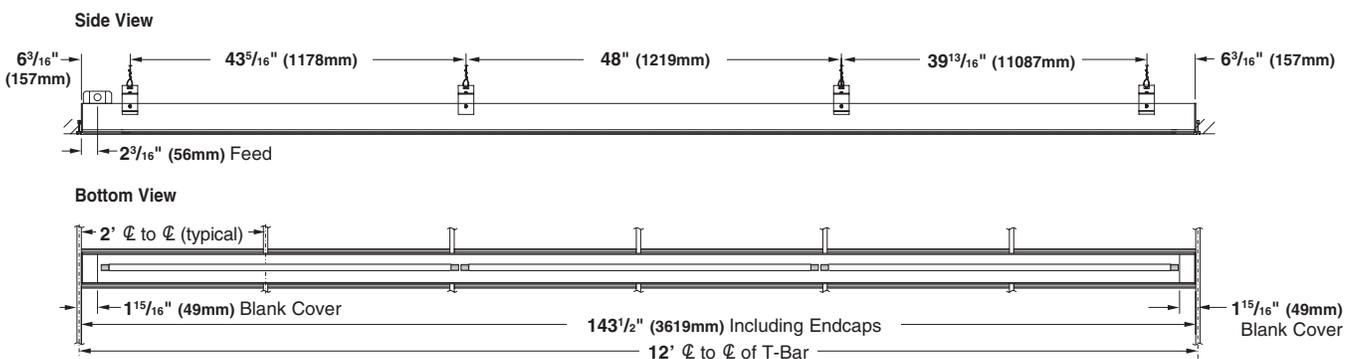

Fixture supplied with 7/8 knockout located 2<sup>3</sup>/<sub>16</sub>" from end in top of fixture.

For other lengths, lamping, continuous runs or configurations please specify overall length (in feet), accessories desired and sketch/drawing of configuration. SELUX will detail project drawings upon order and supply submittal drawings for approval. Individual fixtures cannot be field joined. If you have any questions please contact SELUX customer service or applications engineering for assistance (1-800-SELUX-CS).