


M100 Recessed Linear Fluorescent Spackle Flange - STAGGERED LAMPS



Project: _____ **Type:** _____ **Qty:** _____


M10S	-	-	-	-	-	-	-
Fixture Series	Lamp Type	Shielding	Mounting	Nominal Length	Finish	Voltage	
-	-	-	-	-	-	-	-

Options (refer to separate data sheets for ordering codes and details)

Fixture Series	Lamp Type	Shielding	Mounting	Nominal Length	Finish	Voltage	Options
M10S M100 Recessed Multi-Mount Form Staggered Lamps	1T5 F28T5	OD Extra Diffuse Lens	SF1 Spackle Flange (1/2" dry wall)	008 8 foot	WH White	120	(qty.) EM Stand-by Battery Pack ¹ (prefix quantity, i.e. - 5EM) FS Single Fusing DM Dimming ¹ (specify system) DMA Digital Addressable Dimming ¹ FW Flex Whip (standard) FW1 Flex Whip (dimming) Track Eutrac Standard ² DL Suitable for Damp Locations CCEA Chicago Plenum Downlights (See MR16 spec sheets, pp.98-99)
	1T5HO F54T5HO	SD Satine Lens		012 12 foot	BK Black	277	
	2T5 (2x)F28/T5		SF2 Spackle Flange (5/8" dry wall)	For actual lengths see following page. For other lengths, configurations indicate nominal length rounded to the next highest foot. Factory will supply layout drawings. Individual fixtures cannot be field joined.		SV Silver	
					SP Specify RAL#		

¹Must be low profile ballasts (1 1/2" W x 1 3/16" H); consult factory for details. ²Consult factory for details.

Spackle Flange (SFx)

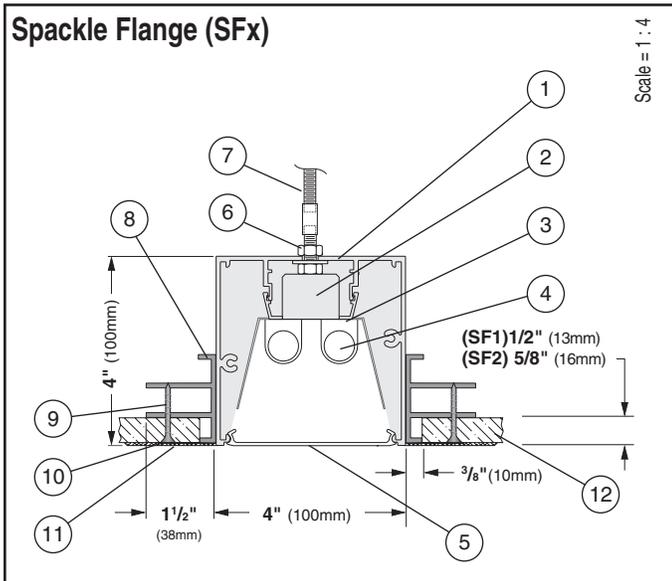

1. Housing - Continuous, 6063-T5 extruded aluminum profile up to 16 feet long. Joined with Connector Plus Joining System for ease of installation and to assure a uniform appearance.

2. Ballast - Electronic, high power factor, class "P", type "A" sound rating. Specify 120v, 277v, or 347v. Ballast is factory pre-wired with leads to one end of fixture. Consult factory for ballast options.

3. Gear Tray - Die formed gear tray with integral factory preset sliding covers to fill extrusion with light, with a matt white finish for even illumination. Geartray installs as complete electrical unit and is held in place with knurled dress nuts. It is fully accessible from below ceiling.

4. Lamps - As noted (by others). Other lamp lengths or wattages available, consult factory.

5. Shielding - Choose between **OD** Extra Diffuse Lens and **SD** Satine Lens. See page 8 for more details.

6. Pre-installed 1" 1/4-20 Stud - Attached to fixture every nominal 4 feet. Coupling and threaded rod Supplied and installed by others.

7. Coupling and Threaded Rod to Structure - Supplied and installed by others.

8. Spackle Flange - For 1/2" (SF1) or 5/8" (SF2) thick sheet rock, installed at factory.

9. Dry Wall Screw - Supplied and installed by others.

10. Fiberglass Sheetrock Tape - Supplied and installed by others.

11. Plaster Skimcoat 1/16" - Supplied and installed by others.

12. Plaster board - Supplied and installed by others. For 1/2" thick specify SF1; for 5/8" thick specify SF2.

Interior Luminaire Finish -

Standard interior colors are White (WH), Black (BK) and Silver (SV). RAL colors (SP) are available, please specify RAL#.

SELUX Corp. © 2006
TEL: (845) 691-7723
FAX: (845) 691-6749
www.selux.com/USA
M10S_SF-01 (v5.0)



Union Made Affiliated
with IBEW Local 363

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.selux.com/usa are the most recent versions and supercede all other printed or electronic versions.



M10S (Single Staggered Lamps) Spackle Flange Layout Dimensions

For T5 lamps only, for other lamping consult factory.


8 foot Individual

Typical End View (all lengths)

Side View

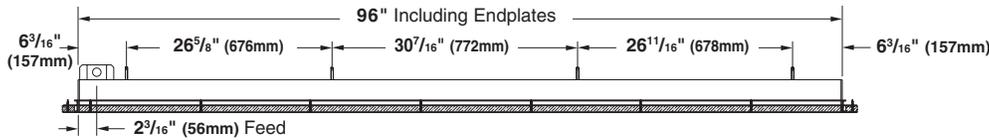


Bottom View

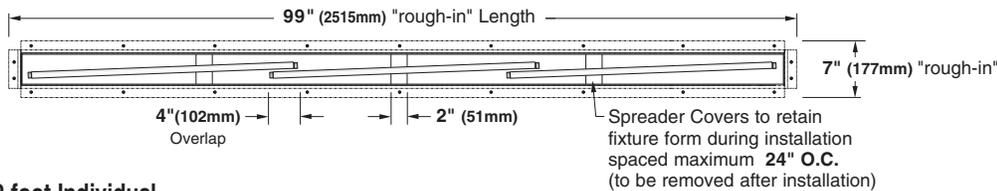


12 foot Individual

Side View

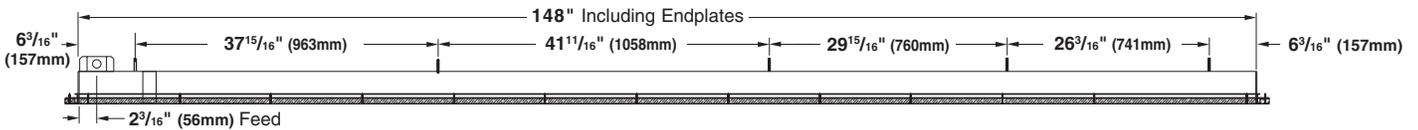

Bottom View

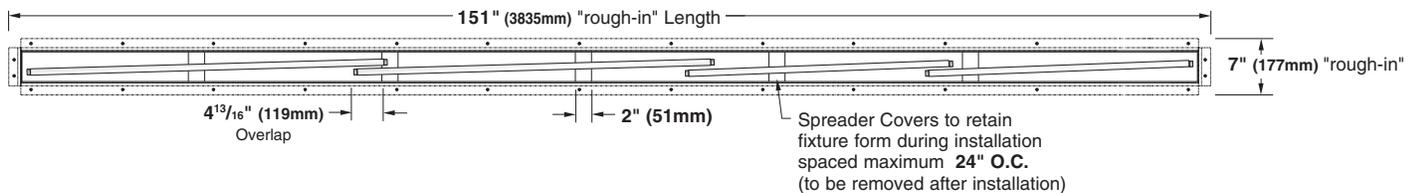

Fixture supplied with 7/8 knockout located 2 3/16 inch from end in top of fixture.


See chart on page 6 for optimal custom lengths under 18 ft. Any length over 18 ft. possible, see below.

For other lengths, lamping, continuous runs or configurations please specify overall length (in feet), accessories desired and sketch/drawing of configuration. SELUX will detail project drawings upon order and supply submittal drawings for approval. Individual fixtures cannot be field joined. If you have any questions please contact SELUX customer service or applications engineering for assistance (1-800-SELUX-CS).

M10S Spackle Flange (Double Staggered Lamps) Layout Dimensions -

Factory will provide submittal drawings. See chart on page 7 for lengths under 22 ft.

Staggered Lamps Principle

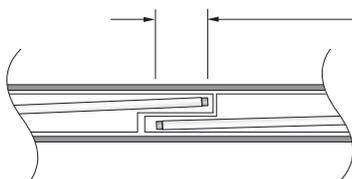

Lamps are spaced with 4" to 6" overlap to completely illuminate luminaire and eliminate socket shadows. Factory will supply approval drawings for other lengths using combinations of 21W & 28W T5 lamps or 39W & 54W T5HO lamps.

Minimal socket shadows may be visible at certain angles. Refer to page 8 for more information.