

M60

Recessed Linear Fluorescent Spackle Flange

se'lux®



Project: _____ **Type:** _____ **Qty:** _____

M60	—	—	—	—	—	—	—
Fixture Series	Lamp Type	Shielding	Mounting	Nominal Length	Finish	Voltage	
—	—	—	—	—	—	—	—

Options (refer to separate data sheets for ordering codes and details)


Fixture Series	Lamp Type	Shielding	Mounting	Nominal Length	Finish	Voltage	Options
M60 M60 Recessed Multi-Mount Form	1T5 F28T5	MA Matte Parabolic	SF1 Spackle Flange (1/2" dry wall)	004 4 foot	WH White	120	(qty.) EM Stand-by Battery Pack ¹ (prefix quantity, i.e. - 5EM)
	1T5HO F54T5HO	MP Silky Specular Parabolic Louver	SF2 Spackle Flange (5/8" dry wall)	008 8 foot	BK Black	277	FS Single Fusing
		SD Satine Lens		012 12 foot	SV Silver	347	DM Dimming ¹ (specify system)
		OD Extra Diffuse Lens		For actual lengths see following page. For other lengths, configura- tions indicate nominal length rounded to the next highest foot. Factory will supply layout draw- ings. Individual fixtures cannot be field joined.	SP Specify RAL#		DMA Digital Addressable Dimming ¹
							SI Satine Acrylic Inlay ²
							FW Flex Whip (standard)
							FW1 Flex Whip (dimming)
							Track Eutrac Standard ³
							DL Suitable for Damp Locations
							CCEA Chicago Plenum
							Downlights (See MR11 spec sheet, pp.98)

¹Must be low profile ballasts (1 7/8" W x 1 1/16" H); consult factory for details.

²Available for MP Louver only.

³Consult factory for details.

Spackle Flange (SFx)

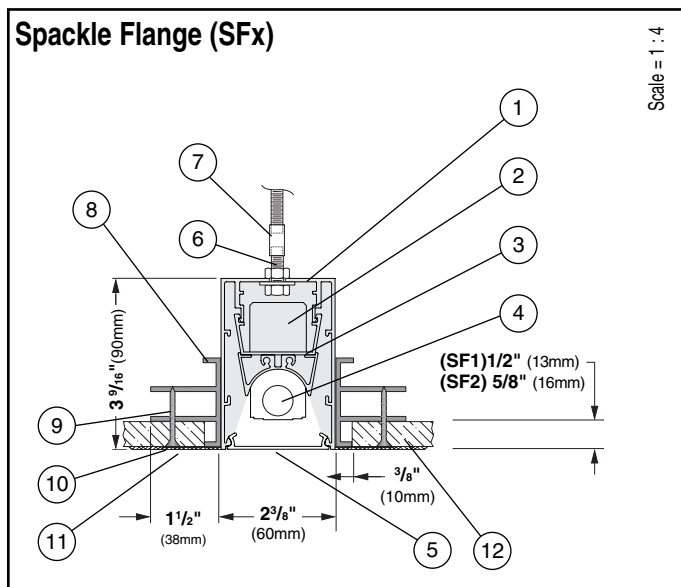

1. Housing - Continuous, 6063-T5 extruded aluminum profile up to 16 feet long. Joined with Connector Plus Joining System for ease of installation and to assure a uniform appearance.

2. Ballast - Electronic, high power factor, class "P", type "A" sound rating. Specify 120v, 277v, or 347v. Ballast is factory pre-wired with leads to one end of fixture. Consult factory for ballast options.

3. Gear Tray - Die formed gear tray with integral factory preset sliding covers to fill extrusion with light, with a matt white finish for even illumination. Geartray installs as complete electrical unit and is held in place with knurled dress nuts. It is fully accessible from below ceiling.

4. Lamps - As noted (by others). Other lamp lengths or wattages available, consult factory.

5. Shielding - Louvers offer excellent glare control in longitudinal, lateral, and all diagonal planes. High quality aluminum louvers and acrylic shielding allow true freedom of layout for today's modern spaces.

6. Pre-installed 1" 1/4-20 Stud - Attached to fixture every nominal 4 feet.

7. Coupling and Threaded Rod to Structure - Supplied and installed by others.

8. Spackle Flange - For 1/2" (SF1) or 5/8" (SF2) thick sheet rock, installed at factory.

9. Dry Wall Screw - Supplied and installed by others.

10. Fiberglass Sheetrock Tape - Supplied and installed by others.

11. Plaster Skimcoat 1/16" - Supplied and installed by others.

12. Plaster Board - Supplied and installed by others. For 1/2" thick specify SF1; for 5/8" thick specify SF2.

Interior Luminaire Finish -

Standard interior colors are White (WH), Black (BK) and Silver (SV). RAL Classic colors (SP) are available, please specify RAL#.

SELUX Corp. © 2006

TEL: (845) 691-7723

FAX: (845) 691-6749

www.selux.com/usa

M60_SF-01 (v5.0)




Union Made Affiliated
with IBEW Local 363

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials that in our opinion will not alter the function of the product. Specification sheets found at www.selux.com/usa are the most recent versions and supersede all other printed or electronic versions.


M60 Spackle Flange Layout Dimensions

Nominal 4 foot Individual


Typical End View (all lengths)

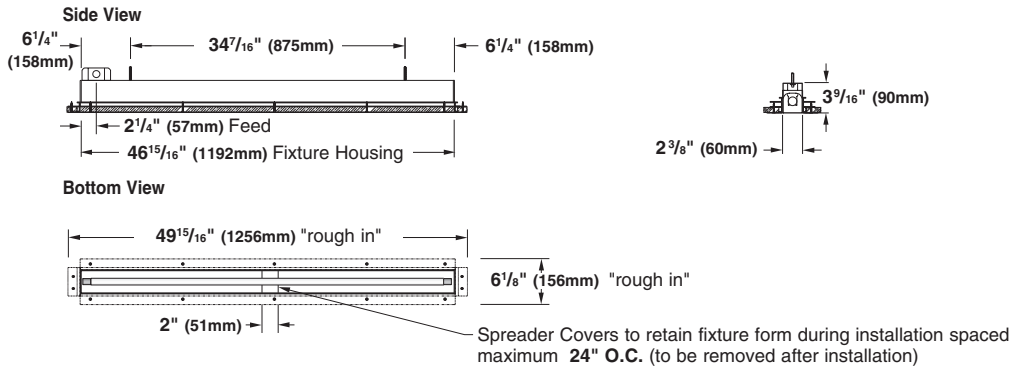

Nominal 8 foot Individual

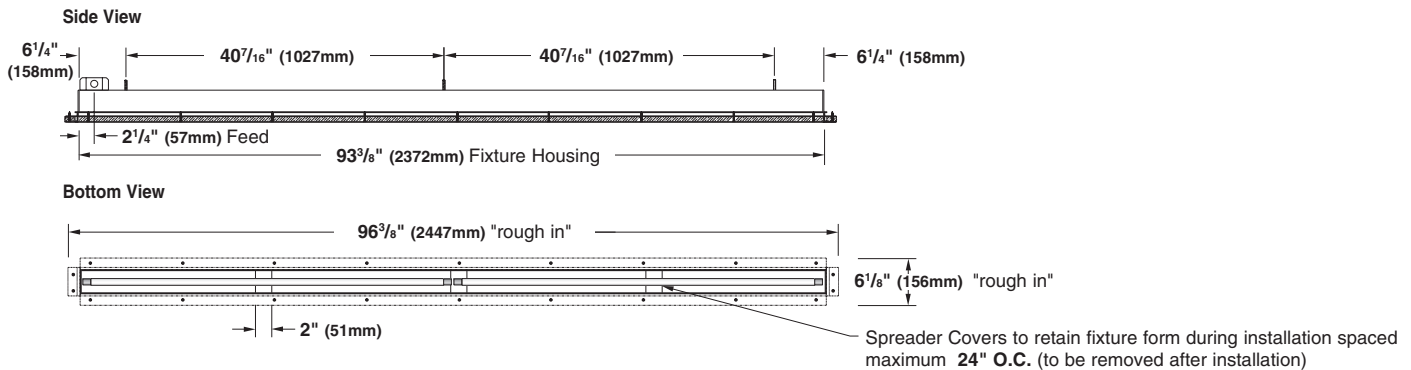

Nominal 12 foot Individual

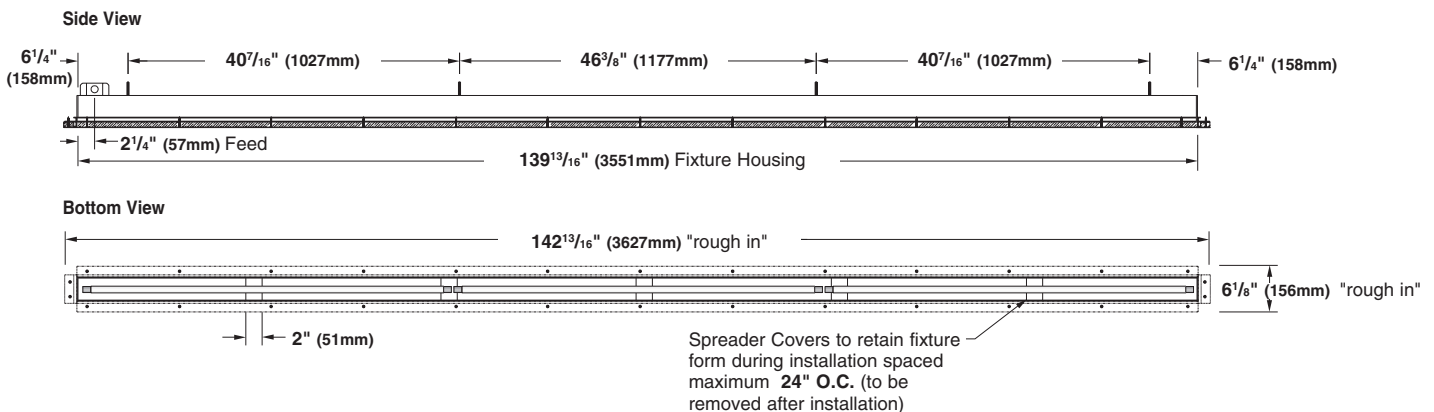

Fixture supplied with 7/8 knockout located 2 1/4" from end in top of fixture.

For other lengths, lamping, continuous runs or configurations please specify overall length (in feet), accessories desired and sketch/drawing of configuration. SELUX will detail project drawings upon order and supply submittal drawings for approval. Individual fixtures cannot be field joined. If you have any questions, contact SELUX customer service or applications engineering for assistance (1-800-SELUX-CS).