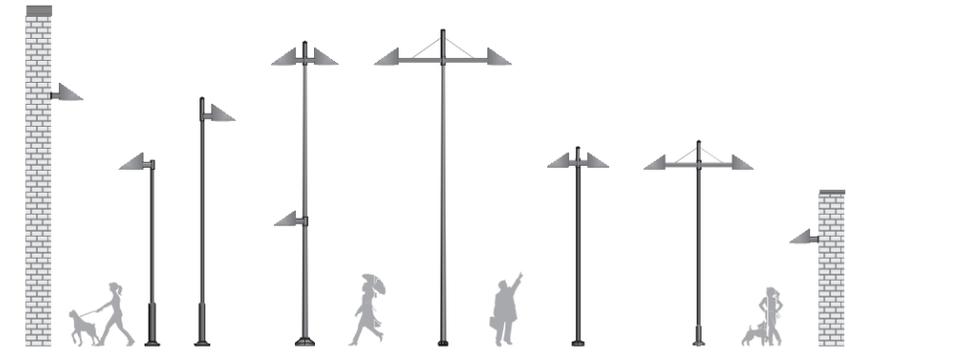# Vektor 1
Vektor 2

Construction
- Formed stainless steel fixture body
- Stainless steel fasteners
- Tempered glass lens on hinged access door held in place with captive fasteners
- Sealed optic chamber

Lamping/Optics
- H.I.D. lamping 50w to 400w
- Type II and V distributions
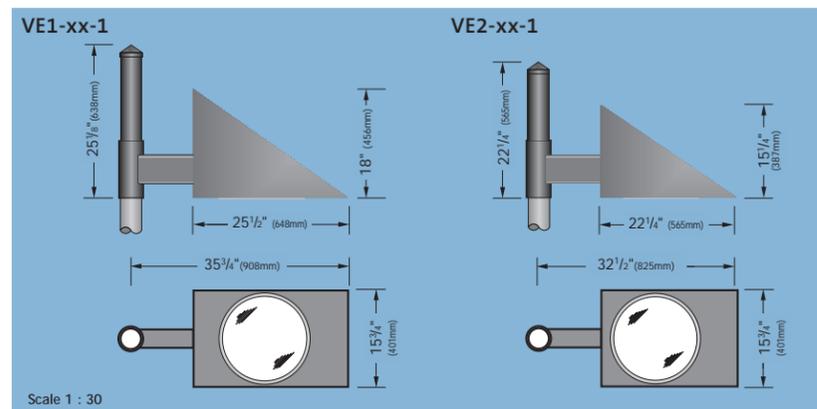- Full Cutoff classification

Design Features
- Available in two sizes for smooth design transition from street/parking lots to walkways and building entrances
- Available with or without top mast post
- Geometrically clean design
- Single/double pole mount, wall mount and various mounting arms available

Finish
- Multi-step cleaning and sealing process
- High quality polyester powder coat finish (CLICK HERE FOR DETAILS)

Certifications
- UL and ULC listed
- ASTM and PCI for finish

VE1-xx-1
25⅛" (638mm)
25½" (648mm)
35¾" (908mm)
15¼" (40mm)
18" (456mm)

VE2-xx-1
22¼" (500mm)
22¼" (565mm)
32½" (825mm)
15¼" (40mm)
15¼" (387mm)

Scale 1 : 30

For more configurations see Vektor 1 and Vektor 2 spec sheets at www.selux.com/usa

Ordering Matrix

Vektor 1 Spec Sheet (CLICK HERE)   Vektor 2 Spec Sheet (CLICK HERE)

Series | **VE1** Vektor 1 | **VE2** Vektor 2

Reflector | **R2** Type II Reflector | **R5** Type V Reflector

Mounting | **1** Single | **2** Double | **L1**[1] Single 4' Arm | **L2**[1] Double 4' Arm | **M1**[2] Single 3' Arm | **M2**[2] Double 3' Arm | **W** Wall Mount | **T** Single Fitter

Lamping MH | **H050**[2,3] 50w | **H070**[2] 70w | **H100**[2] 100w | **H150**[2] 150w | **H175**[2] 175w | **H250**[1] 250w | **H400**[1] 400w

Lamping HPS | **S050**[2,3] 50w | **S070**[2] 70w | **S100**[2] 100w | **S150**[2] 150w | **S250**[1] 250w | **S400**[1] 400w

Voltage | **120** | **208** | **240** | **277** | **347**

Color | **BK** Black | **WH** White | **BZ** Bronze | **SV** Silver | **SP** Specify RAL#

[1] Vektor 1 only   [2] Vektor 2 only   [3] Only available in 120v and 277v
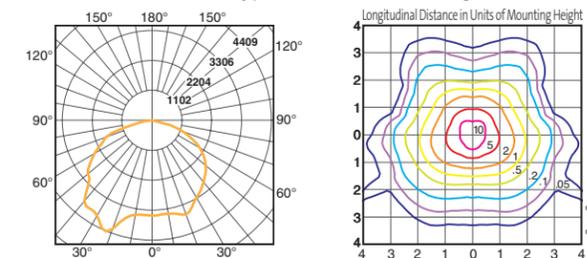
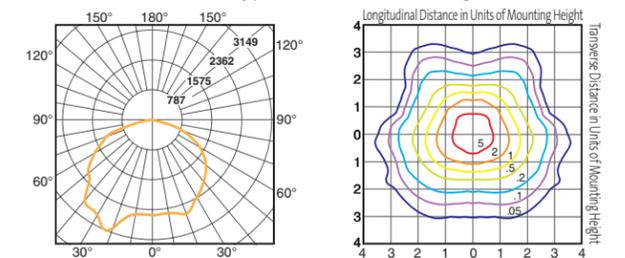CLICK HERE FOR POLE INFO.   CLICK HERE FOR MOUNTING ARM INFO.   CLICK HERE FOR LAMP INFO.
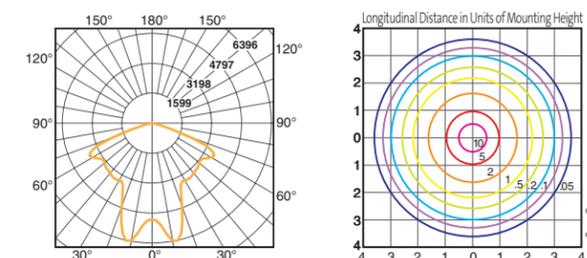
Photometry

VE1-R2-xx-H250 (Type II Full Cutoff/mounting ht. = 16')

VE2-R2-xx-H175 (Type II Full Cutoff/mounting ht. = 16')

VE1-R5-xx-H250 (Type V Full Cutoff/mounting ht. = 16')

VE2-R5-xx-H175 (Type V Full Cutoff/mounting ht. = 16')