

Quadro 1

se'lux®



Ordering Matrix

For details and specifications, see current spec sheet ([CLICK HERE](#))

Series | QD1 Quadro 1

Shielding | **SP** Type V Silver Louver | **WP** Type V White Louver | **MR** Type V MTR 150 Refractor | **M3** Type IV MTR 180 Refractor | **M5** Type V MTR 180 Refractor | **MC** Type V MTR Cone Refractor | **B3 or B5** Type IV or V Borosilicate Glass Refractor

Mounting | **1** Single | **2** Double | **W** Wall Mount

Lamping MH | **H050*** 50w | **H070** 70w | **H100** 100w | **H150**** 150w | **H175**** 175w

Lamping HPS | **S050*** 50w | **S070** 70w | **S100** 100w | **S150**** 150w

Voltage | **120** | **208** | **240** | **277** | **347**

Finish | **BK** Black | **WH** White | **BZ** Bronze | **SV** Silver | **SP** Specify RAL#

Options | **HS** House Side Shield (180°)

* Only available in 120v and 277v


**Only available with M3, M5, B3 and B5 refractors

[CLICK HERE FOR POLE INFO.](#) [CLICK HERE FOR MOUNTING ARM INFO.](#) [CLICK HERE FOR LAMP INFO.](#)


Photometry

Shielding Options

QD1-MR-1-H100 (Type V Semi-Cutoff/mounting ht. = 16')

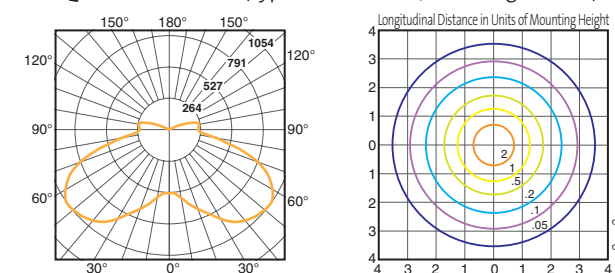

QD1-M3-1-H100 (Type IV Semi-Cutoff/mounting ht. = 16')

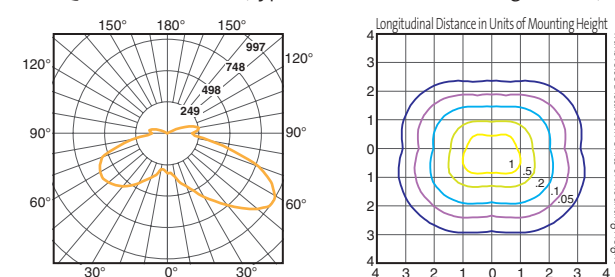

Silver Louver (SP) - Type V Cutoff

- "Dark Light" effect offers Superior Visual Comfort
- H100. Max Candela = 788 at 35° from vertical



White Louver (WP) - Type V Cutoff

- Brightness Control with Subtle Source Luminance
- H100. Max Candela = 837 at 55° from vertical



MTR 150 (MR) - Type V Semi-Cutoff

- Minimum Intensity at Critical Viewing Angles
- H100. Max Candela = 1054 at 55° from vertical



MTR 180 (M3 or M5) - Type IV or Type V Semi-Cutoff

- Minimum Intensity at Critical Viewing Angles
- M3 H100. Max Candela = 1386 at 55° from vertical



MTR Cone (MC) - Type V Semi-Cutoff

- Optimal Inverted Cone MTR Refractor Form
- H100. Max Candela = 1044 at 45° from vertical




Borosilicate Glass Refractors (B3 or B5)

- Type III or V Non-Cutoff
- High efficiency for Maximum Spacing applications
- H100. Max Candela B3 = 737 at 70°/B5 = 748 at 75°

For more options, see our website at www.selux.com/usa

QD1-xx-1



Scale 1 : 30

Construction

- Die-cast and formed aluminum components
- One-piece UV-stabilized polycarbonate globe
- Stainless steel fasteners
- Sealed optic chamber

Lamping/Optics

- H.I.D. lamping 50w to 175w
- Eight refractor options
- Type III, IV and V distributions
- Cutoff and Semi-Cutoff classifications

Design Options

- Single, double or wall mount

Finish

- Multi-step cleaning and sealing process, high quality polyester powder coat finish ([CLICK HERE FOR DETAILS](#))

Certifications

- UL and ULC listed
- IP 54
- ASTM and PCI for finish