



Arc[®] Mini

se'lux[®]



Construction

- Formed aluminum construction
- Precision anodized reflectors
- Completely sealed optic chamber

Lamping/Optics

- H.I.D. lamping 50w to 175w
- Type II distribution
- Cutoff and Full Cutoff classifications

Design Options


- Choice of three architectural mounting arm styles
- Choose flat or sag tempered glass lens
- Two sizes offer design compatibility from street/parking lot to walkways

Finish

- Multi-step cleaning and sealing process
- High quality polyester powder coat finish (click here for details)

Certifications

- UL and ULC listed
- ASTM and PCI for finish

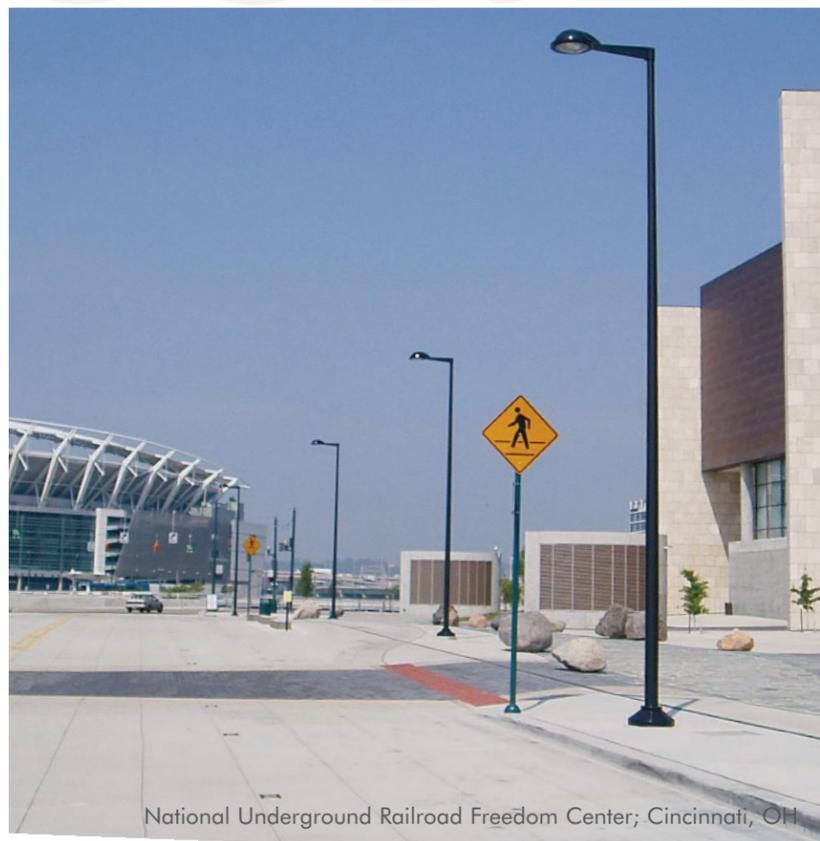

National Underground Railroad Freedom Center; Cincinnati, OH

Ordering Matrix

For details and specifications, see our website at www.selux.com/usa

Series | AR2 Arc[®] Mini luminaire

Shielding | L Tempered Flat Glass Lens | S Sagged Glass Lens

Mounting | S1 Single 29" Arm | S2 Double 29" Arm | L1 Single 41" Arm | L2 Double 41" Arm | AS1/BS1 Single 48" Arm | AS2/BS2 Double 48" Arm | AL1/BL1 Single 96" Arm | DM1 Single 21" Direct Mount

Lamping MH | H050* 50w | H070 70w | H100 100w | H150 150w | H175 175w

Lamping HPS | S050* 50w | S070 70w | S100 100w | S150 150w

Voltage | 120 | 208 | 240 | 277 | 347

Finish | BK Black | WH White | BZ Bronze | SV Silver | SP Specify RAL#

Options | HS House Side Shield (180°)


* Only available in 120v and 277v

[CLICK HERE FOR POLE INFO;](#) [CLICK HERE FOR ARM INFO;](#) [CLICK HERE FOR LAMP](#)


Photometry

Mounting Arm Options

AR2-L-R2-1-H175 (Type II Full Cutoff/mounting ht. = 10')

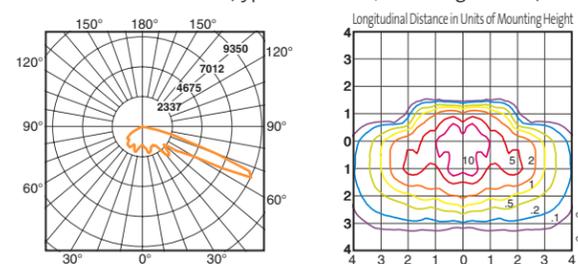


AR2-L-R2-1-H175-xx-xxx-HS (Type II Full Cutoff/mounting ht. = 10')

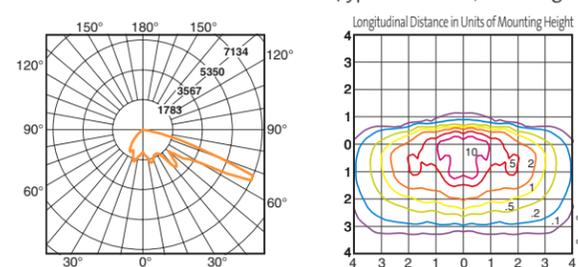

- Toltec Arm Series (S1, S2, L1, L2)**
Cast Aluminum Mounting Bracket secured into double T constructed aluminum arm with integral enclosed wireway for mounting to 3 1/2" tenon.
- Spanner Arm Series (AS1, AS2, AL1)**
Ø 1 1/2" (38mm) Twin Aluminum Arms with Ø 3/8" (9.5mm) support rod for mounting to 3 1/2" tenon.
- Gladiator Arm Series (BS1, BS2, BL1)**
Ø 2" (51mm) Aluminum Arm with 3/8" (9.5mm) thick aluminum gussets for mounting to 3 1/2" tenon.
- Direct Mount Mounting (DM1)**
Cast Aluminum Arm with integral wire way cover for mounting directly to side of pole.

See Mounting Arms p.120; For more options, see our website at www.selux.com/usa

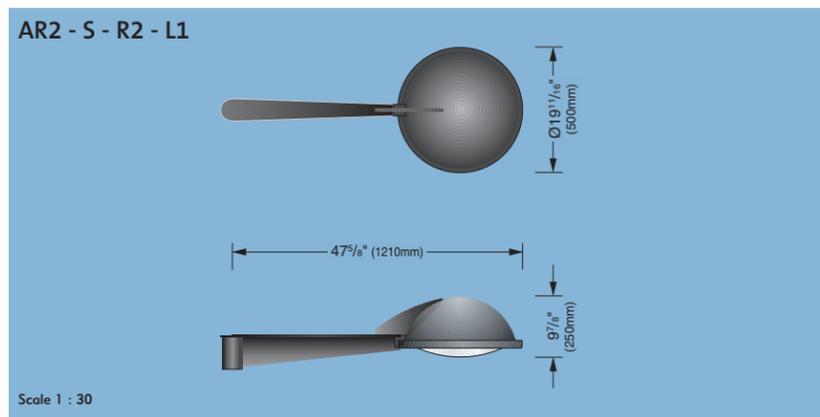

IDA Approved (Configuration with L - Tempered Flat Glass Lens)

© SELUX Corporation