





MTR

Bollards

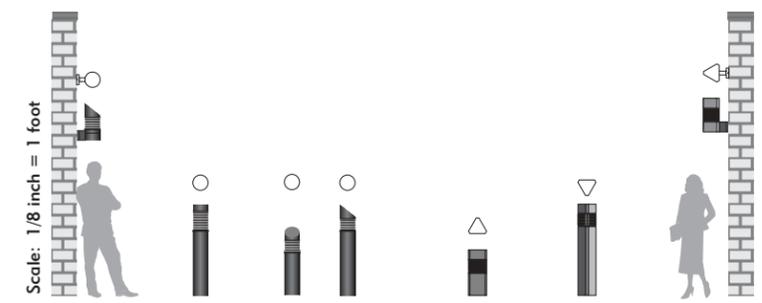

Construction

- Die-cast and extruded aluminum components
- Stainless steel fasteners
- Borosilicate glass lamp enclosure
- Completely sealed optic chamber

Lamping/Optics

- H.I.D. lamping to 100w; 32 or 42 watt compact fluorescent
- Patented MTR refractors reduce glare at critical angles for visual comfort

Design Options


- Choice of three bollard designs
- Distinguished wall mount units

Finish

- High quality polyester powder coat finish (CLICK HERE FOR DETAILS)

Certifications

- UL and ULC listed
- IP 54
- ASTM and PCI for finish

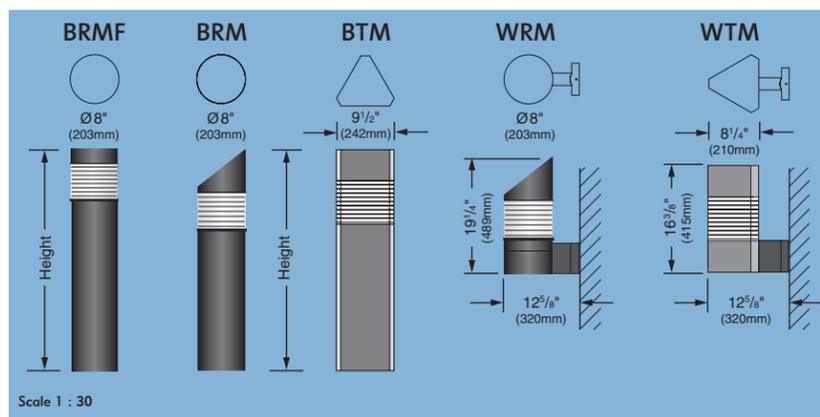

Ordering Matrix

For details and specifications, see current spec sheet (CLICK HERE)

Series | BRMF MTR Bollard Round Flat Top | BRM MTR Bollard Round | BTM MTR Bollard Triangular |

WRM MTR Wall Mount Round | WTM MTR Wall Mount Triangular

Mounting Height | 2 Two Feet | 3 Three Feet | 4 Four Feet | W Wall Mount | or Specify Custom Height

Lamping MH | H050* 50w | H070 70w | H100 100w

Lamping HPS | S050* 50w | S070 70w | S100 100w

Lamping Compact Fluorescent | F32** 32w | F42** 42w

Finish | BK Black | WH White | BZ Bronze | SV Silver | SP Specify RAL#

Voltage | 120 | 208 | 240 | 277 | 347


Options | HS House Side Shield (180°)

* Only available in 120v and 277v **Not available in 208v or 240v

CLICK HERE FOR LAMP INFO.

Photometry

BRM-3-H100 (Type V Semi-Cutoff/mounting ht. = 3')

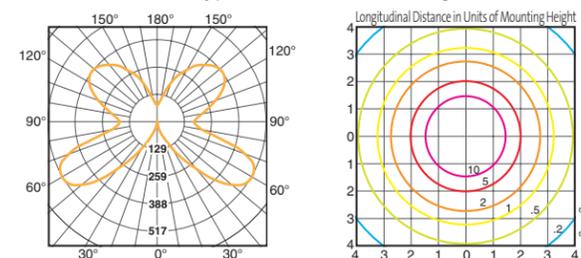

BTM-3-H100 (Type IV Non-Cutoff/mounting ht. = 3')

